

Motor Protection Circuit Breaker

We touch your **electricity** everyday!

State of the art Manufacturing Facilities



Haridwar, Noida Ph-I
& Noida Ph-II Plant



C&S Electric Ltd.

Corporate Office : 222, Okhla Industrial Estate, New Delhi - 110 020

Tel. : +91-11-3088 7520 - 29, Fax: +91-11-2684 7154, 2682 9063

International Business Division: Tel. : +91-11-4161 3503, 3088 7520-29, Fax: +91-11-2683 8291, 2684 7342
email : exports@cselectric.co.in

Central Marketing Office: Tel. : +91-11-3088 7520-29, Fax: +91-11-2684 8241, 2684 7342
email : cmo@cselectric.co.in, info@cselectric.co.in



MPCB

Motor Protection Circuit Breaker up to 100A




32AF

0.1-0.16...22-32A (16 step)

TCMS-32S




• Standard



TCMS-32H



• High break
• Magnetic release




63AF

28-63A (3 step)

TCMS-63S




• Standard



TCMS-63H



• High break
• Magnetic release




100AF

55-100A (3 step)

TCMS-100S



• Standard




TCMS-100H




• High break
• Magnetic release



Motor Protection Circuit Breaker, versatile efficient technologically advance compact design

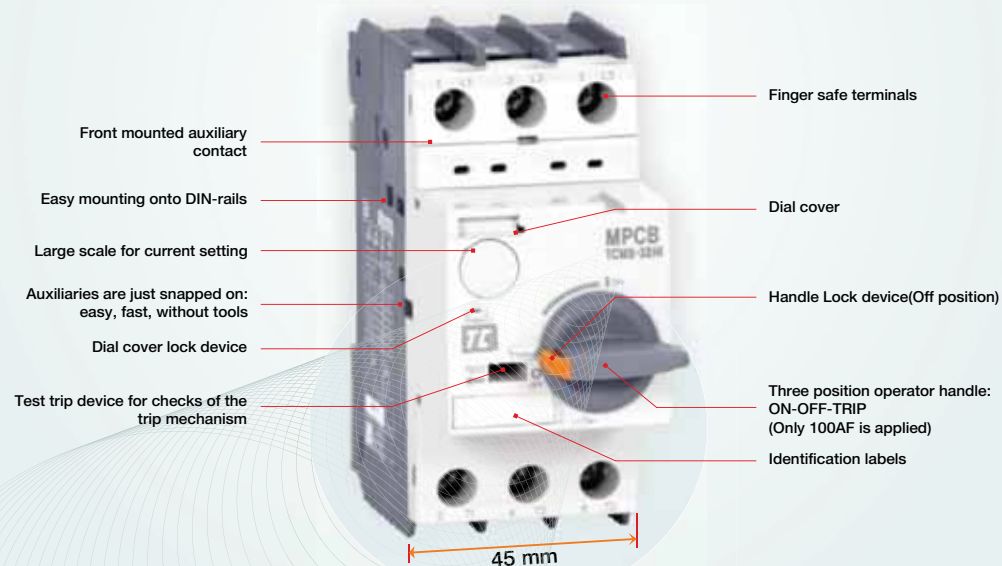

Common wide variety of accessories from 32~100A frame size enable a flexible response to changes in specifications, saves inventory cost.

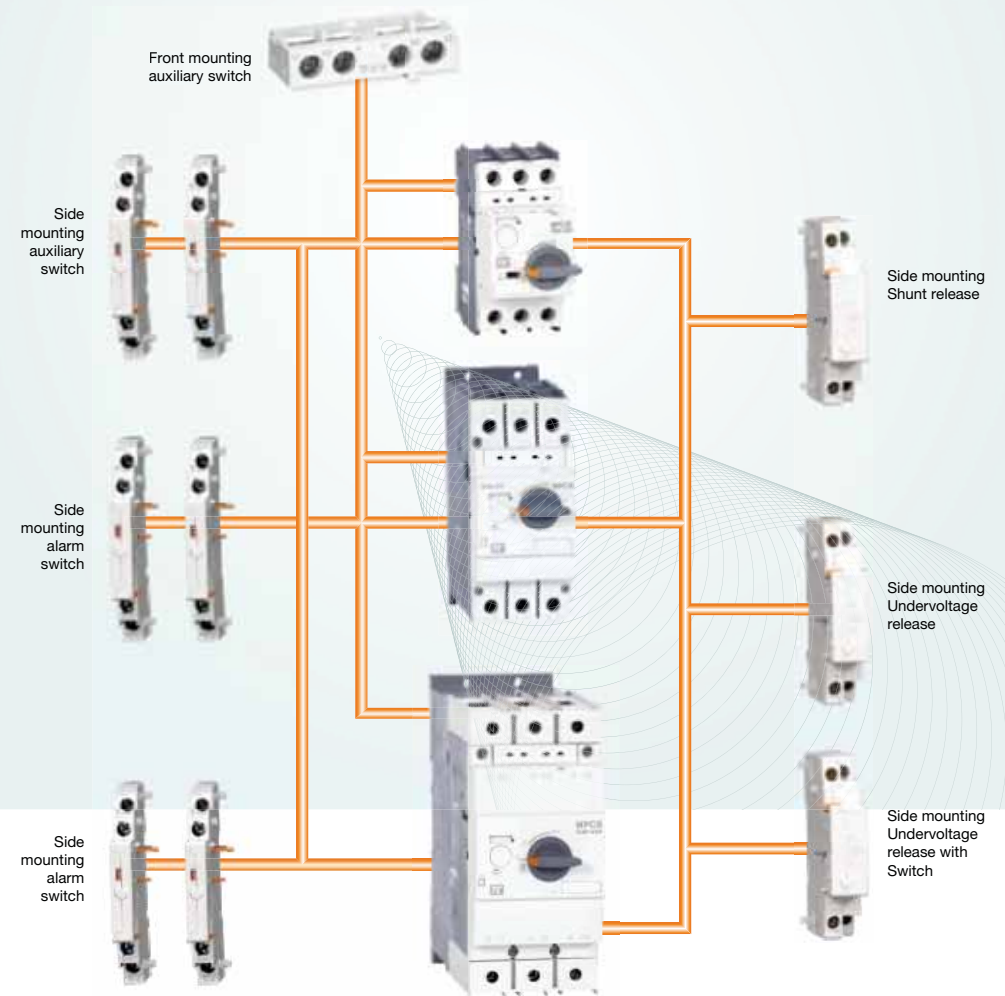

Handle Lock

Dial Cover

Terminals




TCMS-32



Screw

TCMS-63



Lug

TCMS-100



Lug

Benefits

- Motor Protection
- Isolation
- Phase failure protection
- Current limiting Short Circuit Protection
- Class 10 trip class protection
- Tested for Icu / Ics at 690V
- Ambient temperature compensation
- Common accessories for complete range

Advantages

- Rated Insulation voltage 690V
- Complete range in #3 frames sizes 45mm upto 32A, 55mm upto 63A & 70mm upto 100A
- Adjustable Thermal release
- Trip test
- Three position operator: ON-OFF trip
- Handle locks in the OFF position
- Finger safe terminal
- 35 Din rail mounting

Standards

Compliance with International Standards

- IEC 60947-2 & IEC 60947-4-1
- UL508 (Manual Motor Controller in group installation)
- CSA C22-2 no 14



Global Accreditations



Product Selection Guide

■ Quick Selection table...IEC rating	7
■ Motor Protection	9
■ Short Circuit Protection for Motor Controller	11
■ Accessories: Electrical Auxiliaries	12

Technical Information

■ General Data	17
■ IEC Performance Data (Motor Protection)	22
■ Type '2' Coordination as per IEC 947-4-1	25
■ Time / Current Characteristics	27
■ Dimensions	28

TCMS-32S



TCMS-32HI

Frame			32AF																				
Type	Current adjustable type		TCMS-32S						TCMS-32H														
	Instantaneous type		-						TCMS-32H-I														
Breaking capacity			Standard						High breaking														
Handle Type			Toggle						Rotary														
Number of poles			3						3														
Rated operational voltage (Ue)			Up to 690V						Up to 690V														
Rated frequency			50/60 Hz						50/60 Hz														
Rated insulation voltage (Ui)			690V						690V														
Rated impulse voltage (Uimp)			6kV						6kV														
Utilization category	IEC 60 947-2 (Breaker)		Cat. A						Cat. A														
	IEC 60 947-4 (Motor starter)		AC 3						AC 3														
Mechanical endurance (Operating)			100,000						100,000														
Electrical endurance (Cycles)			100,000						100,000														
Max operating frequency per hour (Oprm/h)			25						25														
Temperature compensation (Operation)			-20 ~ +60 ?						-20 ~ +60 ?														
Instantaneous short circuit release			13 x Ie max.						13 x Ie max.														
Overload protection			O						O														
Phase failure function			O						O														
Trip indicating function																							
Test function			O						O														
Weight (g)			320						360														
Rated breaking capacity (kA)	Rated operational current (Ie)	Thermal release Adjustment range (A)	240V* 230V#		415V* 400V#		460V* 440V#		525V* 500V#		690V* 600V#		230V* 240V#		415V* 400V#		460V* 440V#		525V* 500V#		690V* 600V#		
			Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	
	0.16	0.1-0.16	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	0.25	0.16-0.25	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	0.4	0.25-0.4	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	0.63	0.4-0.63	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	1	0.63-1	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
	1.6	1-1.6	100	100	100	100	100	100	100	100	3	3	100	100	100	100	100	100	100	100	100	100	
	2.5	1.6-2.5	100	100	100	100	100	100	100	50	38	3	3	100	100	100	100	100	100	100	100	100	
	4	2.5-4	100	100	100	100	100	100	100	50	38	3	3	100	100	100	100	100	100	100	100	8	8
	6	4-6	100	100	100	100	50	38	15	11	3	3	100	100	100	100	100	100	100	100	8	8	
	8	5-8	100	100	100	100	15	11	10	8	3	3	100	100	100	100	100	100	100	100	6	6	
	10	6-10	100	100	100	100	15	11	10	8	3	3	100	100	100	100	50	38	50	38	6	6	
	13	9-13	100	100	50	38	15	11	6	5	3	3	100	100	100	50	38	50	38	6	6	6	
	17	11-17	100	100	50	38	10	8	6	5	3	3	100	100	100	100	50	38	42	32	6	6	
	22	14-22	50	38	20	15	10	8	6	5	3	3	100	100	50	38	20	15	10	8	4	4	
	26	18-26	40	30	15	11	8	6	6	5	3	3	100	100	50	38	20	15	10	8	4	4	
	32	22-32	40	30	15	11	8	6	6	5	3	3	100	100	50	38	20	15	10	8	4	4	
	40	28-40	30	22	15	11	6	4	5	4	3	3	100	100	50	38	20	15	10	8	4	4	
	50	34-50	-	-	-	-	-	-	-	-	-	-	100	100	50	38	20	15	10	8	4	4	
	63	45-63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	75	55-75	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	90	70-90	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	100	80-100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

* Permissible up to 5% over Voltage
Permissible up to 5% over Voltage



TCMS-63H




TCMS-100H

63AF										100AF									
TCMS-63H										TCMS-100H									
TCMS-32HI										TCMS-100HI									
High break										High breaking									
Rotary										Rotary									
3										3									
Up to 690V										Up to 690V									
50 / 60 Hz										50 / 60 Hz									
1000V										1000V									
8kA										8kA									
Cat. A										Cat. A									
AC 3										AC 3									
50,000										50,000									
25,000										25,000									
25										25									
- 20 – 60 °C										- 20 – 60 °C									
13 x le max.O										13 x le max.O									
O										O									
O										O									
O										O									
O										O									
1,000										2,200									
240V 230V		415V 400V		460V 440V		525V 500V		690V 600V		240V 230V		415V 400V		460V 440V		525V 500V		690V 600V	
Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	50	38	50	38	6	5	-	-	-	-	-	-	-	-	-	-
100	100	100	100	50	38	42	32	6	5	-	-	-	-	-	-	-	-	-	-
100	100	50	50	50	38	12	9	5	5	100	100	100	50	50	38	35	27	12	9
100	100	50	50	50	38	12	9	5	5	100	100	100	50	50	38	35	27	12	9
100	100	50	50	35	27	12	9	5	5	100	100	100	50	50	38	35	27	12	9
100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	25	19	12	9
100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	25	15	12	9
100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	15	11	10	8
100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	15	11	8	6
-	-	-	-	-	-	-	-	-	-	100	100	100	50	50	38	12	9	6	6


Motor Protection

- Adjustable thermal release
- Magnetic release 13 I_e max.
- Trip class 10
- Protective function
 - Phase-failure protection
 - short circuit
 - overload
- Ambient temperature compensation



Type	Rated operational current I _e [A]	Thermal release Adjustment range [A]	Magnetic release Operating current [A]	Switching of 3 phase AC motor, AC-2, AC-3						400 / 415V	
				3-phase [kW] (50 / 60Hz)			3-phase [HP] (60Hz)			I _{cu} [kA]	I _{cs} [kA]
				230V	400V	690V	230V	460V	575V		
TCMS-32S (Standard)	0.16	0.1...0.16	2.1	-	0.02	-	-	-	-	100	100
	0.25	0.16...0.25	3.3	0.03	0.06	-	-	-	-	100	100
	0.4	0.25...0.4	5.2	0.06	0.09	-	-	-	-	100	100
	0.63	0.4...0.63	8.2	0.09	0.12	0.25	-	-	-	100	100
	1	0.63...1.0	13	0.12	0.25	0.55	-	1/2	1/2	100	100
	1.6	1.0...1.6	20.8	0.25	0.55	1.1	1/3	3/4	1	100	100
	2.5	1.6...2.5	32.5	0.37	0.75	1.5	1/2	1.5	1.5	100	100
	4	2.5...4.0	52	0.75	1.5	3	1	2	3	100	100
	6	4...6	78	1.5	2.2	4	1.5	5	5	100	100
	8	5...8	104	1.5	3	5.5	2	5	5	100	100
	10	6...10	130	3	4	7.5	3	7.5	10	50	38
	13	9...13	169	3	5.5	11	3	7.5	10	50	38
	17	11...17	221	4	7.5	11	5	10	15	20	15
	22	14...22	286	4	7.5	15	7.5	15	20	15	11
	26	18...26	338	5.5	11	18.5	7.5	15	20	15	11
	32	22...32	416	7.5	15	22	10	20	30	15	11
TCMS-32H (High Break)	0.16	0.1...0.16	2.1	-	0.02	-	-	-	-	100	100
	0.25	0.16...0.25	3.3	0.03	0.06	-	-	-	-	100	100
	0.4	0.25...0.4	5.2	0.06	0.09	-	-	-	-	100	100
	0.63	0.4...0.63	8.2	0.09	0.12	0.25	-	-	-	100	100
	1	0.63...1.0	13	0.12	0.25	0.55	-	1/2	1/2	100	100
	1.6	1.0...1.6	20.8	0.25	0.55	1.1	1/3	3/4	1	100	100
	2.5	1.6...2.5	32.5	0.37	0.75	1.5	1/2	1.5	1.5	100	100
	4	2.5...4.0	52	0.75	1.5	3	1	2	3	100	100
	6	4...6	78	1.5	2.2	4	1.5	5	5	100	100
	8	5...8	104	1.5	3	5.5	2	5	5	100	100
	10	6...10	130	3	4	7.5	3	7.5	10	100	100
	13	9...13	169	3	5.5	11	3	7.5	10	100	100
	17	11...17	221	4	7.5	11	5	10	15	50	38
	22	14...22	286	4	7.5	15	7.5	15	20	50	38
	26	18...26	338	5.5	11	18.5	7.5	15	20	50	38
	32	22...32	416	7.5	15	22	10	20	30	50	38

- Adjustable thermal release
- Magnetic release 13 I_e max.
- Trip class 10
- Protective function
 - Phase-failure protection
 - short circuit
 - overload
- Ambient temperature compensation



Type	Rated operational current I _e [A]	Thermal release Adjustment range [A]	Magnetic release Operating current [A]	Switching of 3 phase AC motor, AC-2, AC-3						400 / 415V	
				3-phase [kW] (50 / 60Hz)			3-phase [HP] (60Hz)			I _{cu} [kA]	I _{cs} [kA]
				230V	400V	690V	230V	460V	575V		
TCMS-63H (High Break)	10	6-10	130	3	4	7.5	3	7.5	10	100	100
	13	9-13	169	3	5.5	11	3	7.5	10	100	100
	17	11-17	221	4	7.5	11	5	10	15	50	50
	22	14-22	286	4	7.5	15	7.5	15	20	50	50
	26	18-26	338	5.5	11	18.5	10	20	25	50	50
	32	22-32	416	7.5	15	22	10	25	30	50	50
	40	28-40	520	7.5	18.5	30	15	30	40	50	50
	50	34-50	650	11	22	45	15	40	50	50	50
	63	45-63	819	15	30	55	20	50	60	50	50
	17	11-17	221	4	7.5	11	5	10	15	100	100
TCMS-100H (High Break)	22	14-22	286	4	7.5	15	7.5	15	20	100	50
	26	18-26	338	5.5	11	18.5	10	20	25	100	50
	32	22-32	416	7.5	15	22	10	25	30	100	50
	40	28-40	520	7.5	18.5	30	15	30	40	100	50
	50	34-50	650	11	22	45	15	40	50	100	50
	63	45-63	819	15	30	55	20	50	60	100	50
	75	55-75	975	22	37	63	25	60	75	75	50
	90	70-90	1170	30	45	75	30	75	100	75	50
	100	80-100	1300	30	45	90	40	75	100	75	50

Short Circuit Protection for Motor Controller

- Without thermal releases
- Magnetic release 13 x I_e max
- Protective function
-Short Circuit



Type	Rated operational current I _e [A]	Thermal release Adjustment range [A]	Magnetic release Operating current [A]	Switching of 3 phase AC motor, AC-2, AC-3						400 / 415V	
				3-phase [kW] (50 / 60Hz)			3-phase [HP] (60Hz)			I _{cu} [kA]	I _{cs} [kA]
				230V	400V	690V	230V	460V	575V		
TCMS-32HI (Standard)	0.16	-	2.1	-	0.02	-	-	-	-	100	100
	0.25	-	3.3	0.03	0.06	-	-	-	-	100	100
	0.4	-	5.2	0.06	0.09	-	-	-	-	100	100
	0.63	-	8.2	0.09	0.12	0.25	-	-	-	100	100
	1	-	13	0.12	0.25	0.55	-	1/2	1/2	100	100
	1.6	-	20.8	0.25	0.55	1.1	1/3	3/4	1	100	100
	2.5	-	32.5	0.37	0.75	1.5	1/2	1.5	1.5	100	100
	4	-	52	0.75	1.5	3	1	2	3	100	100
	6	-	78	1.5	2.2	4	1.5	5	5	100	100
	8	-	104	1.5	3	5.5	2	5	5	100	100
	10	-	130	3	4	7.5	3	7.5	10	100	100
	13	-	169	3	5.5	11	3	7.5	10	100	100
	17	-	221	4	7.5	11	5	10	15	50	38
	22	-	286	4	7.5	15	7.5	15	20	50	38
	26	-	338	5.5	11	18.5	7.5	15	20	50	38
TCMS-63HI (High Break)	32	-	416	7.5	15	22	10	20	30	50	38
	10	-	130	3	4	7.5	3	7.5	10	100	100
	13	-	169	3	5.5	11	3	7.5	10	100	100
	17	-	221	4	7.5	11	5	10	15	50	50
	22	-	286	4	7.5	15	7.5	15	20	50	50
	26	-	338	5.5	11	18.5	10	20	25	50	50
	32	-	416	7.5	15	22	10	25	30	50	50
TCMS-100HI (High Break)	40	-	520	7.5	18.5	30	15	30	40	50	50
	50	-	650	11	22	45	15	40	50	50	50
	63	-	819	15	30	55	20	50	60	50	50
	17	-	221	4	7.5	11	5	10	15	100	100
	22	-	286	4	7.5	15	7.5	15	20	100	50
	26	-	338	5.5	11	18.5	10	20	25	100	50
	32	-	416	7.5	15	22	10	25	30	100	50
TCMS-100HI (High Break)	40	-	520	7.5	18.5	30	15	30	40	100	50
	50	-	650	11	22	45	15	40	50	100	50
	63	-	819	15	30	55	20	50	60	100	50
	75	-	975	22	37	63	25	60	75	75	50
	90	-	1170	30	45	75	30	75	100	75	50
	100	-	1300	30	45	90	40	75	100	75	50

Accessories (Electrical Auxiliaries)

Model	Description	Connection diagram
TFX...	Auxiliary Switch - Front mounting 2-pole - One front mounting module per circuit breaker	1NO1NC 2NO 2NC
TLX...	Auxiliary Switch - Side mounting on the left 2-pole - One side mounting module per circuit breaker	1NO1NC 2NO 2NC
TLA...	Any Trip Alarm Switch - Operates in case of trip - Side mounting on the left 2-pole - Set I LA first in case of using I LX together (I MS-63 can not accept I LX and I LA together)	
TAM...	Magnetic Trip Alarm Switch - Operates in case of instantaneous trip - Side mounting on the left 2-pole - Set I LAM first in case of using I LX together	

Accessories (Electrical Auxiliaries)

Model	Description	Connection diagram	
TRS...	Shunt release - Side mounting on the right - One side mounting module per circuit breaker. - Can not use with TRU or TRUX		110–127 Hz 220–230V 50Hz 415–440V 50Hz
TRU...	Undervoltage release - Side mounting on the right - One side mounting module per circuit breaker. - Can not use with TRU or TRUX		110–127V 50Hz 220–230V 50Hz 415–440V 50Hz
TRX...	Undervoltage release with Switch - Side mounting on the right - Include 2NO Auxiliary contact - One side mounting module per circuit breaker. - Can not use with TRU or TRUX - Can not attach to TCMS-32S		110–127V 50Hz 220–230V 50Hz 415–440V 50Hz



E-Handle (Rotary-type)

TCMS E-Handle is a Rotary-type Handle accessory which can be attached to the front to control and verify the ON, TRIP, OFF condition of Manual Motor Starters under the situation of closing panel.

- Application Model: TCMS-32H/Hi, TCMS-63S/H/Hi, TCMS-100S/H/Hi
- Operation temp.: -20~ +60°C
- Degree of protection: Ip65
- Material of insulation: Plastic (PA66)
- CE and UL certified
- Locking device: Lockable in on/off position

Type	Application MMS	Remarks
MEH-32	TCMS-32H, 32HI	Length of shaft: 115 or 315mm
MEH-63	TCMS-63S, 63H, 63HI	
MEH-100	TCMS-100S, 100H, 100HI	




Phase Bus

It is a device for a parallel connection with power terminals in the circuit lined up by TCMS, and it can provides the solution "Simple wiring"and "Compact wiring space".


- Application Model : TCMS-32, 63
- Safety Cover built-in
- CE and UL certified
- RoHS compliance

Type	Application MMS	Number of Terminals	Rated current	Safety cover attached
PB-322	TCMS-32S, 32H, 32HI	2	63A	PBPC-32 (32for S, H)
PB-323		3		
PB-632	TCMS-63S, 63H, 63HI	2	108A	PBPC-63
PB-633		3		

Phase Bus



Diagram



Enclosure

Case cover of TCMS enclosure is specifically designed with dust-proof and corrosive-proof structure. Therefore, it is the optimum product to use in dusty areas such as cement plants, cotton mills as well as in the presence of corrosive gas or liquid (excl. explosive, flammable gas) such as fertilizer, refinery, and plating plant.

- Application Model: TCMS - 32H / HI
- CE and UL certified
- Material of insulation: Plastic (ABS)
- Operation temperature : -20~ +60°C
- Degree of protection: Ip65

Type	Application TCMS	Remarks
EPH-32	TCMS-32H, 32HI	Surface mount



Dial Cover

Dial cover is used to protect the set value from the operation that is not intended.

It is supplied as standard for all TCMS

- Application Model: TCMS-32, 63, 100 (All types)




Insulation Barrier

Insulation barrier is used to enlarge the creepage distance and clearance to meet therequirement of UL.

- Application Model : TCMS-100

Type	Application TCMS
TIB100	TCMS-100S, 100H, 100HI




Screw mounting holder

32AF TCMS is only for DIN rail mountable by itself. Screw mounting holder is used to mount TCS on a panel by screws.

- Application Model : TCMS-32

Type	Application TCMS	Remarks
TMP 32	TCMS-32S, 32H, 32HI	For M4 screw

Accessories (Electrical Auxiliaries)



Direct adaptor and Mounting unit

Direct adaptor, DA

Direct adaptor is used to connect TCMS directly with a contactor

Mounting unit, MU

This device is attached module to connect joined TCMS with a contactor

- Application Model: TCMS+contactor TCIM06~16 / TPIM06~16 Mini contactor

Type		Combine Devices	
Direct adaptor	Mounting Unit	TCMS	MC
TDA-32SA	MU-45	TCMS-32S	Mini MC TCIM06~16
TDA-32HA		TCMS-32H, 32HI	
TDA-32SD		TCMS-32S	Mini MC TDIM06~16
TDA-32HD		TCMS-32H, 32HI	

Terminals

	TCMS32S	TCMS32H	TCMS63S, 63H	TCMS100S, 100H
Conformity to standards	IEC60947 UL508, UL508 Type E CE, UL			
Approvals				
Terminal parts				
Screwdriver				
Single-core	1,conductor [mm] / [AWG]	1...10 / 18...8	0,75...35 / 18...2	2,5...70 / 12...2/0
2,conductor	[mm] / [AWG]	1...6 / 18...10	0,75...25 / 18...4	2,5...50 / 12...1/0
Standard	1,conductor [mm] / [AWG]	1...6 / 18...10	0,75...35 / 18...2	2,5...70 / 12...2/0
2,conductor	[mm] / [AWG]	1...6 / 18...10	0,75...25 / 18...4	2,5...50 / 12...1/0
Flexible	1,conductor [mm] / [AWG]	1...6 / 18...10	0,75...25 / 18...4	2,5...50 / 12...1/0
2,conductor	[mm] / [AWG]	0,75...4 / 18...10	0,75...4 / 18...10	0,75...35 / 10...2
Tightening torque	[Nm] / [lb-in]	0,8...2,5 / 7...22	0,8...2,5 / 7...22	3...4,5 / 26...39

Power consumption


	TCMS32S	TCMS32H	TCMS63S, 63H	TCMS100S, 100H
Total power loss Pv				
Circuit breaker at rated load operating temperature	[W]	In = 0,16~1,6A : 4,4 In = 2,5~26A : 7,4 In = 32A : 4,0	In = 0,16~1,6A : 4,4 In = 2,5~26A : 7,4 In = 32A : 4,0	In = 17~32A : 15 In = 40~63A : 21,8 In = 75~100A : 17,8

Mounting

35mm DIN rail for TCMS32~63

35mm or 75mm DIN rail for TCMS100

- use 15mm depth for 35mm DIN rail



Operating positions

DIN rail mounting

Environment

Ambient air temperature

storage: - 50...+ 80 °C

operation: - 20...+ 60 °C

Ambient temperature compensation : - 20...+ 60 °C

Maximum operating altitude: 2000m

Protection degree: IP20

Shock resistance: 25g


Vibration resistance: 5~150Hz

Caution for thermal adjustments

- Keep the setting range as shown below.
- Moving counterclockwise out of the setting range may cause the damage of the device.
- Calibration by ambient air temperature

A: set to one point lower	Calibrated automatically	B: set to one point higher
-20°C	-5°C	+40°C
		+60°C

In case of using out of the standard air temperature range (-5°C~+40°C) it needs to be calibrated by one point



Dial setting method

Auxiliaries

		Auxiliary contacts for front mounting T FX...		Auxiliary contacts for left side mounting T LX...		Alarm switch for left side mounting T LA...	
Rated thermal current / th		5		10		10	
at 40 °C ambient temperature	[A]	3		6		6	
at 60 °C ambient temperature	[A]						
Contact class coordination according to NEMA (UL/CSA-Standards)		A600 Q300		A600 Q300		A600 Q300	
Back-up fuses gG, gL	[A]	16		16		16	
Rated supply current	[V]	-	240	24	240	24	240
AC-15:	[A]	-	3	6	4	6	4
DC-13:	[V]	24	220	24	220	24	220
	[A]	1	0,1	2	0,25	2	0,25
Weight (g)		18		30		40	
Terminal parts							
Screwdriver							
Single-core	1,conductor [mm] / [AWG]	0,5...2,5 / 20...14				Pozidriv size 2 0,5...2,5 / 20...14	
2,conductor	[mm] / [AWG]	-				0,5...2,5 / 20...14	
Standard	1,conductor [mm] / [AWG]	0,5...4 / 20...10				0,5...4 / 20...10	
2,conductor	[mm] / [AWG]	0,75...2,5 / 18...14				0,75...2,5 / 18...14	
Tightening torque	[Nm] / [lb-in]	0,8...1,2 / 7...10				0,8...1,2 / 7...10	

General Data

	Undervoltage release for right side mounting TRU...	Undervoltage release with 2 auxiliary contacts for right side mounting TRUX...	Shunt release for right side mounting TRS...
Actuating voltage			
Pull-in	0,7...1,1 × Us	0,85...1,1 × Us	0,85...1,1 × Us
Drop-out		0,7...0,35 × Us	0,7...0,35 × Us
Rated control voltage			
min.:	24V 50Hz / 28V 60Hz	24V 50Hz / 28V 60Hz	24V 50Hz / 28V 60Hz
max.:	415~440V 50Hz / 460~480V 60Hz	415~440V 50Hz / 460~480V 60Hz	415~440V 50Hz / 460~480V 60Hz
Coil rating			
Pull-in	8,5VA, 6W	8,5VA, 6W	8,5VA, 6W
Hold	3VA, 1,2W	3VA, 1,2W	3VA, 1,2W
Opening time (ms)	-	20	20
Weight (g)	18	30	40
Terminal parts			
			
Screwdriver		Pozidriv size 2	
Single-core	1.conductor [mm] / [AWG]	0,5...2,5 / 20...14	
	2.conductor [mm] / [AWG]	0,5...2,5 / 20...14	
Standard	1.conductor [mm] / [AWG]	0,5...4 / 20...10	
	2.conductor [mm] / [AWG]	0,75...2,5 / 18...14	
Tightening torque	[Nm] / [lb-in]	0,8...1,2 / 7...10	

Installation of auxiliaries

Be sure to turn off the main switch of TCMS before any other action.

TCMS-32S/H/Hi

To install TFX remove the cover first.

- 2 each of TLX can be installed together.
- Only one of auxiliaries among TRU, TRS and TRUX can be mounted on the right side of TCMS.
- Do not give trip signal to TRS longer than 10 sec.
- Refer to the possible combination chart for the mounting of TLX, TLA and TLAM on left side of TCMS.

- Push the trip button before installation of TLAM
- Remove the indicated part in the fig. before the additional installation of TLX

Separation of auxiliaries from TCMS

- Be sure to turn off the main switch of TCMS before the separation.
- Push softly the separation button on the side of the auxiliary and pull it.

TCMS-63, 100S/H/Hi

To install TFX remove the cover ① first.

- 2 each of TLX can be installed together. (only 1 each for TCMS-63)
- Only one of auxiliaries among TRU, TRS and TRUX can be mounted on the right side of TCMS.
- Do not give trip signal to TRS longer than 10 sec.
- Refer to the possible combination chart for the mounting of TLX, TLA and TLAM on left side of TCMS.

- Remove the indicated part of TCMS-63 and TCMS 100 as shown in the fig. before the installation of TLA

- Do not install TLA in the status of TRIP of TCMS-100



- Remove the indicated part as shown in the above fig. before the additional installation of TLX

Separation of auxiliaries from TCMS

- Be sure to turn off the main switch of TCMS before the separation.
- Push softly the separation button on the side of the auxiliary and pull it.

Installation of auxiliaries

How to Install and reset TRUX

Installing

1. Check if the trip button of TRUX is "UP". If not, push the side lever ① to come it up.
2. Fit the both lower hooks ② into the TCMS.
3. Rotate the handle of TCMS to the 20 to 30 degree ③ to ON direction and keep it.
4. Fit the both upper hooks ④ into the TCMS
5. Input power to the TRUX
6. Turn ON the handle of TCMS


Resetting

The trip button of TRUX does not come "UP" in the event of tripping due to undervoltage. To turn ON the TCMS after the tripping

- ① Turn OFF the TCMS and check if the trip button of TRUX comes "UP"
- ② Push the trip button
- ③ Turn ON the TCMS


Combination with mini contactors

Adaptor	TCMS	+ Contactor Model
TDA-16SA	TCMS-32S	+ TCI 06~16
TDA-16SD	TCMS-32S	+ TCI 06~16
TDA-16HA	TCMS-32H	+ TCI 06~16
TDA-16HD	TCMS-32H	+ TCI 06~16



Installation of auxiliaries


Please read this chart completely before installing the auxiliaries. Improper combination can cause electric failure or accident.

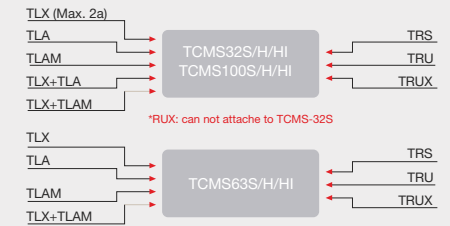

General Data


● E-Handle

Structure

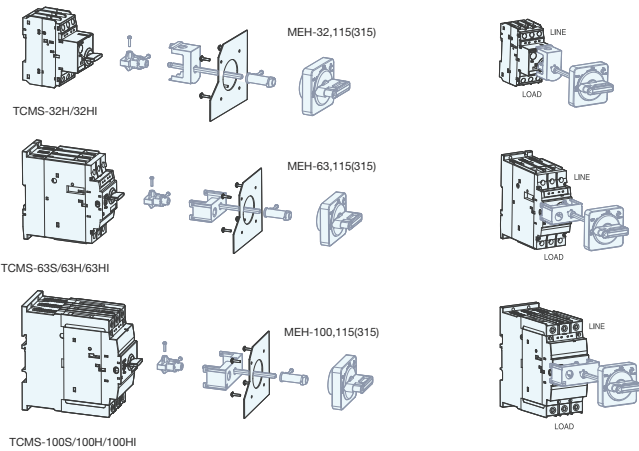


Locking Device

When opening the panel door at ON position



Open Panel Door



Releasing

Locking
Installation at OF, OFF position

① Setting to regular position through turning the handle



On Position
(Vertical State)



Off Position
(Horizontal State)


② Pushing




③ Locking




3 ø 4-8




MEH-32/63/100




Projection should be passed through the hole when assembling



MEH-32




Projection should be passed through the hole when assembling



MEH-63/100

● E-Handle


Installation

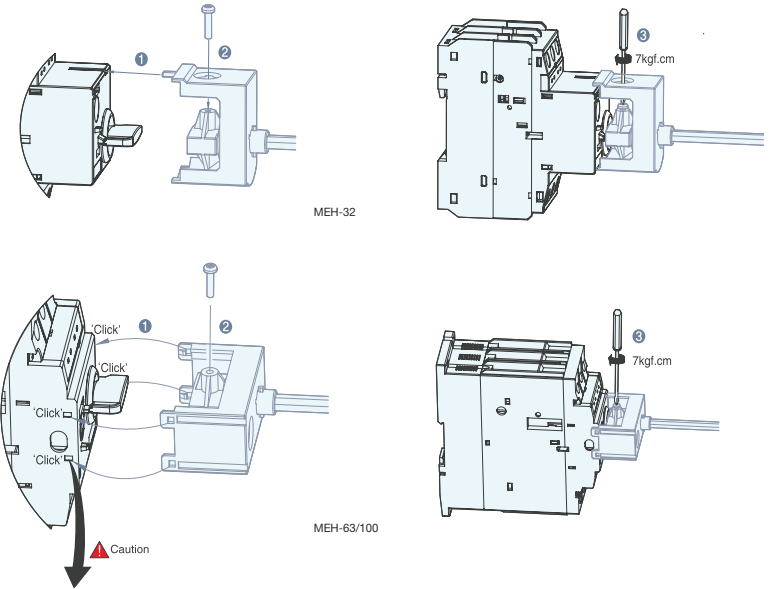


Restricted fact of Assembling

Assembling is available for TCMS-63/100 with 4 holes on the main cover which is produced after June, 2007 base on manufacturing date.


Operating Test



***Caution**
If trying to open the door at ON or Trip position, locking knob can be damaged.




At On position
Panel door
can not be
opened




At Trip position
Panel door can
not be opened.
At Off position
Panel door can
be opened

General Data

Cutting off the shaft & applying the handle

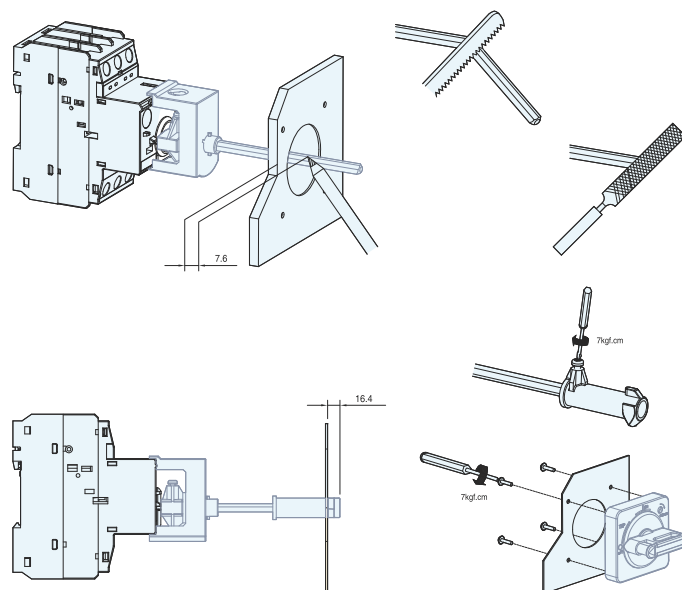

● Enclosure

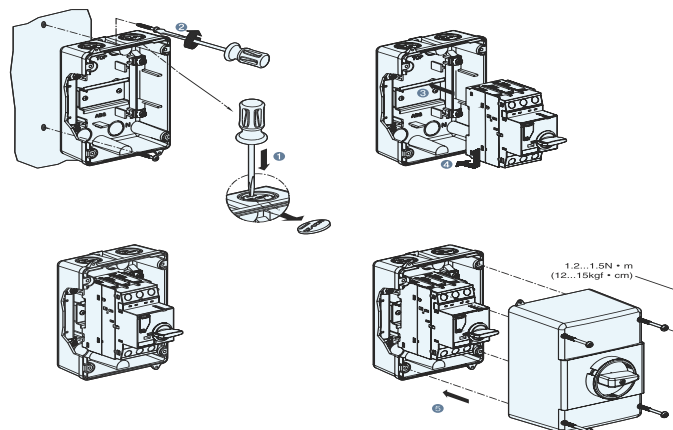

Manual Motor Controller (UL508, CSA, C22.2)

- Combination Motor Controller
- Group Installation
- Type E Starter

• TCMS 32S

Rated operational current I _e [A]		0.16	0.25	0.4	0.63	1	1.6	2.5	4	6	8	10	13	17	22	26	32
Max. short-circuit current																	
240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
480V	[kA]	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50
600V	[kA]	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Motor load																	
1 Phase	115V [HP]	-	-	-	-	-	-	-	1/8	1/4	1/3	1/2	1/2	1	1.5	2	2
	230V [HP]	-	-	-	-	-	1/10	1/6	1/3	1/2	1	1.5	2	3	3	3	5
3 Phase	200V [HP]	-	-	-	-	-	-	1/2	3/4	1	2	2	3	3	5	7.5	7.5
	230V [HP]	-	-	-	-	-	-	1/2	3/4	1.5	2	3	3	5	7.5	7.5	10
	460V [HP]	-	-	-	-	-	3/4	1	2	3	5	5	7.5	10	15	15	20
	575V [HP]	-	-	-	-	1/2	3/4	1.5	3	5	5	7.5	10	15	20	20	30
Maximum rated current of fuse or breaker		[A]	1	1	1	1	3	6	10	15	20	30	40	50	60	80	125
		[A]	15	15	15	15	15	15	15	15	20	30	40	50	60	80	125

• TCMS 32H

Rated operational current I _e [A]		0.16	0.25	0.4	0.63	1	1.6	2.5	4	6	8	10	13	17	22	26	32
Max. short-circuit current																	
240V	[kA]	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
480V	[kA]	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50
600V	[kA]	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Motor load																	
1 Phase	115V [HP]	-	-	-	-	-	-	-	1/8	1/4	1/3	1/2	1/2	1	1.5	2	2
	230V [HP]	-	-	-	-	-	1/10	1/6	1/3	1/2	1	1.5	2	3	3	3	5
3 Phase	200V [HP]	-	-	-	-	-	-	1/2	3/4	1	2	2	3	3	5	7.5	7.5
	230V [HP]	-	-	-	-	-	-	1/2	3/4	1.5	2	3	3	5	7.5	7.5	10
	460V [HP]	-	-	-	-	-	3/4	1	2	3	5	5	7.5	10	15	15	20
	575V [HP]	-	-	-	-	1/2	3/4	1.5	3	5	5	7.5	10	15	20	20	30
Max. fuse size		[A]	1	1	1	1	3	6	10	15	20	30	40	50	60	80	125
Max. breaker size		[A]	15	15	15	15	15	15	15	15	20	30	40	50	60	80	125

• TCMS 63H

Rated operational current I _e [A]		10	13	17	22	26	32	40	50	63
Max. short-circuit current										
240V	[kA]	100	100	100	100	100	100	100	100	100
480V	[kA]	50	50	50	50	50	50	50	50	50
600V	[kA]	10	10	10	10	10	10	10	10	10
Motor load										
1 Phase	115V [HP]	1/2	1/2	1	1.5	2	2	3	3	5
	230V [HP]	1.5	2	3	3	3	5	7.5	10	10
3 Phase	200V [HP]	2	3	3	5	7.5	7.5	10	15	20
	230V [HP]	3	3	5	7.5	7.5	10	10	15	20
	460V [HP]	5	7.5	10	15	15	20	30	30	40
	575V [HP]	7.5	10	15	20	20	30	30	40	60
Max. fuse size		[A]	40	50	60	80	100	125	150	250
Max. breaker size		[A]	40	50	60	80	100	125	150	250



• TCMS 100H

Rated operational current I _e [A]		17	22	26	32	40	50	63	75	90	100
Max. short-circuit current											
240V	[kA]	100	100	100	100	100	100	100	100	100	100
480V	[kA]	50	50	50	50	50	50	50	50	50	50
600V	[kA]	10	10	10	10	10	10	10	10	10	10
Motor load											
1 Phase	115V [HP]	1	1.5	2	2	3	3	5	5	7.5	10
	230V [HP]	3	3	3	5	7.5	10	10	15	20	20
3 Phase	200V [HP]	3	5	7.5	7.5	10	15	20	20	25	30
	230V [HP]	5	7.5	7.5	10	10	15	20	25	30	30
	460V [HP]	10	15	15	20	30	30	40	50	60	75
	575V [HP]	15	20	20	30	30	40	60	60	75	100
Max. fuse size		[A]	60	80	100	125	150	200	250	300	400
Max. breaker size		[A]	60	80	100	125	150	200	250	300	400

IEC Performance Data

Type	TCMS 32S-32H		TCMS 63H		TCMS 100H	
Rated insulation voltage	IEC,IS/UL	V	690 / 600	690 / 600	690 / 600	690 / 600
Rated impulse withstand voltage						
Uimp/Pollution degree			6kV / 3	8kV / 3	8kV / 3	8kV / 3
Rated frequency			50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Utilization category:						
IEC 947-2,IS 13947-2 (Circuit breaker)			Cat. A	Cat. A	Cat. A	Cat. A
IEC 947-4-1,IS 13947-4-1 (Motor starter)			AC 3	AC 3	AC 3	AC 3
Life span						
Mechanical / Electrical (ie max.)	Operations		100,000 / 100,000	50,000 / 25,000	50,000 / 25,000	50,000 / 25,000
Switching frequency	Ope./h		25	25	25	25
Ambient temperature						
Storage	°C		-50 ~ +80	-50 ~ +80	-50 ~ +80	-50 ~ +80
Operation	°C		-20 ~ +60	-20 ~ +60	-20 ~ +60	-20 ~ +60
Operation altitude	m		Up to 2000 (6500 Feet)	Up to 2000 (6500 Feet)	Up to 2000 (6500 Feet)	Up to 2000 (6500 Feet)
Protection class			IP 20	IP 20	IP 20	IP 20
Resistance to shock	g		25	25	25	25
Resistance to vibration	Hz		5 ~ 150	5 ~ 150	5 ~ 150	5 ~ 150
Rated thermal current Ith						
IEC up to 60°C ambient temperature	[A]		0,1 ... 32	6 ...63	11 ...100	11 ...100
Overload protection						
Available			Available	Available	Available	Available
Ambient temperature compensation						
-20 ~ +60			-20 ~ +60	-20 ~ +60	-20 ~ +60	-20 ~ +60
Phase-failure protection						
Available			Available	Available	Available	Available
Trip class	IEC 60947-4-1		10	10	10	10
Magnetic release			13 × In [#]	13 × In [#]	13 × In [#]	13 × In [#]
Total power loss P_v						
Circuit breaker at rated load	[W]		In = 0,16~4A : 9,8	In = 10~22A : 16	In = 17~63A : 17	In = 17~63A : 17
Operating temperature			In = 6~26A : 7,5	In = 26~63A : 12	In = 75~100A : 21	In = 75~100A : 21
			In = 32A : 4,5			
Terminal capacity						
Single-core	1.conductor [mm ²] / [AWG]		1...10 / 18...8	0,75...35 / 18...2	2,5...70 / 12...2/0	2,5...70 / 12...2/0
2.conductor	[mm ²] / [AWG]		1...6 / 18...10	0,75...25 / 18...4	2,5...50 / 12...1/0	2,5...50 / 12...1/0
Stranded	1.conductor [mm ²] / [AWG]		1...6 / 18...10	0,75...35 / 18...2	2,5...70 / 12...2/0	2,5...70 / 12...2/0
2.conductor	[mm ²] / [AWG]		1...6 / 18...10	0,75...25 / 18...4	2,5...50 / 12...1/0	2,5...50 / 12...1/0
Flexible	1.conductor [mm ²] / [AWG]		1...6 / 18...10	0,75...25 / 18...4	2,5...50 / 12...1/0	2,5...50 / 12...1/0
2.conductor	[mm ²] / [AWG]		0,75...4 / 18...10	0,75...16 / 18...6	2,5...35 / 10...2	2,5...35 / 10...2
Tightening torque	[Nm] / [lb-in]		0,8...2,5 / 7...22	3...4,5 / 26...39	4...6 / 35...53	4...6 / 35...53

Note: # In = Max. rated operational current Ie

Accessories		Auxiliary contacts for front mounting TFX...		Auxiliary contacts for left side mounting TLX...		Alarm switch for left side mounting TLA...	
Rated thermal current / th							
at 40°C / 60°C ambient temperature		[A]		[A]		[A]	
5 / 3		16		10 / 6		10 / 6	
Back-up fuses gG, gL		[A]		[A]		[A]	
24 / 3		240 / 2		24 / 6		240 / 4	
Rated supply current		[V] / [A]		[V] / [A]		[V] / [A]	
AC-15:		24 / 1		220 / 0,1		24 / 2	
DC-13:		220 / 0,1		24 / 2		220 / 0,25	

Accessories		Undervoltage release for right side mounting TRU...		Undervoltage release with 2 auxiliary contacts for right side mounting TRUX...		Shunt release for right side mounting TRS...	
Actuating voltage							
Pull-in		0,85...1,1 × Us		0,85...1,1 × Us		0,7...1,1 × Us	
Drop-out		0,7...0,35 × Us		0,7...0,35 × Us			
Coil rating							
Pull-in		8,5VA, 6W		8,5VA, 6W		8,5VA, 6W	
Hold		3VA, 1,2W		3VA, 1,2W		3VA, 1,2W	
On-Time		100%		100%		100%	
Terminal capacity for Accessories							
1.conductor [mm ²] / [AWG]				Single-core		Flexible	
2.conductor [mm ²] / [AWG]				0,5...2,5 / 20...14		0,5...4 / 20...10	
				0,5...2,5 / 20...14		0,75...2,5 / 18...14	

Type	Rated operational current (I _e)	Thermal release Adjustment range (A)	240V * 230V #		415V * 400V #		460V * 440V #		525V * 500V #		690V * 600V #	
			I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}
TCMS-32S	0,16	0,1~0,16	100	100	100	100	100	100	100	100	100	100
	0,25	0,16~0,25	100	100	100	100	100	100	100	100	100	100
	0,4	0,25~0,4	100	100	100	100	100	100	100	100	100	100
	0,63	0,4~0,63	100	100	100	100	100	100	100	100	100	100
	1	0,63~1	100	100	100	100	100	100	100	100	100	100
	1,6	1~1,6	100	100	100	100	100	100	100	100	3	3
	2,5	1,6~2,5	100	100	100	100	100	100	50	38	3	3
	4	2,5~4	100	100	100	100	50	38	15	11	3	3
	6	4~6	100	100	100	100	15	11	10	8	3	3
	8	5~8	100	100	100	100	15	11	10	8	3	3
	10	6~10	100	100	50	38	15	11	6	5	3	3
	13	9~13	100	100	50	38	10	8	6	5	3	3
	17	11~17	100	100	25	19	10	8	6	5	3	3
	22	14~22	50	38	20	15	10	8	6	5	3	3
	26	18~26	40	30	15	11	8	6	6	5	3	3
	32	22~32	40	30	15	11	8	6	6	5	3	3
	40	28~40	100	100	50	50	35	27	10	8	5	4
TCMS-63H	50	34~50	100	100	50	50	35	27	10	8	5	4
	63	45~63	100	100	50	50	35	27	10	8	5	4
TCMS-100H	75	55~75	100	100	100	50	50	38	12	9	6	6
	90	70~90	100	100	100	50	50	38	12	9	6	6
	100	80~100	100	100	100	50	50	38	12	9	6	6

Note : * : Permissible up to 5% over voltage, # : Permissible up to 10% over voltage

gG, gL, only f Icc>Icu
(* = No back up fuse required)

TCMS-32S

Rated operational current I _e	[A]	0,16	0,25	0,4	0,63	1	1,6	2,5	4	6	8	10	13	17	22	26	32
230/240V	[A]	*	*	*	*	*	*	*	*	*	*	*	*	*	125	125	125
400/415V	[A]	*	*	*	*	*	*	*	*	*	*	*	*	80	80	100	100
440/460V	[A]	*	*	*	*	*	*	*	50	50	63	63	80	80	100	100	100
500V	[A]	*	*	*	*	*	*	50	40	50	63	63	80	80	80	80	80
690V	[A]	*	*	*	*	*	20	35	40	50	63	63	63	63	63	63	63

TCMS-32H, 32HI

Rated operational current I _e	[A]	0,16	0,25	0,4	0,63	1	1,6	2,5	4	6	8	10	13	17	22	26	32
230/240V	[A]	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
400/415V	[A]	*	*	*	*	*	*	*	*	*	*	*	*	100	125	125	125
440/460V	[A]	*	*	*	*	*	*	*	*	*	80	80	80	80	100	100	100
500V	[A]	*	*	*	*	*	*	*	*	*	63	80	80	80	80	80	80
690V	[A]	*	*	*	*	*	*	35	40	50	63	63	63	63	63	63	63

TCMS-63H, 63HI

Rated operational current I _e	[A]	10	13	17	22	26	32	40	50	63
230/240V	[A]	*	*	*	*	*	*	*	*	*
400/415V	[A]	*	*	100	125	125	125	160	160	160
440/460V	[A]	100	100	100	125	125	125	125	125	160
500V	[A]	100	100	100	100	100	100	100	100	100
690V	[A]	63	63	63	80	80	80	80	80	80

TCMS-100H, 100HI

Rated operational current I _e	[A]	17	22	26	32	40	50	63	75	90	100
230/240V	[A]	*	*	*	*	*	*	*	*	*	*
400/415V	[A]	*	*	*	*	*	*	*	*	*	*
440/460V	[A]	125	125	125	160	160	160	200	200	200	200
500V	[A]	100	125	125	160	160	160	160	160	160	160
690V	[A]	80	80	80	80	80	100	100	125	160	160

Type '2' coordination according to IEC 947-4-1/ IS13947-4-1

- DOL Feeders
- Short-circuit current $I_k = 50\text{kA}$
Voltage : 400 / 415V, 50/60Hz

Standard motors		Manual motor starter			Contactor	
AC-3 at 400/415V 1500rpm		Circuit breaker	Thermal overload release setting range	Magnetic release response current		
[kW]	[A]	Type	[A]	[A]	Type	[A]
-	-	TCMS-32S 0.16A	0.1~0.16	2.08	TC1M06 / TC1M09	6 / 9
0.06	0.2	TCMS-32S 0.25A	0.16~0.25	3.25	TC1M06 / TC1M09	6 / 9
0.09	0.3	TCMS-32S 0.4A	0.25~0.4	5.2	TC1M06 / TC1M09	6 / 9
0.12	0.4	TCMS-32S 0.63A	0.4~0.63	8.19	TC1M06 / TC1M09	6 / 9
0.18	0.6	TCMS-32S 0.63A	0.4~0.63	8.19	TC1M06 / TC1M09	6 / 9
0.25	0.8	TCMS-32S 1A	0.63~1	13	TC1M06 / TC1M09	6 / 9
0.37	1.1	TCMS-32S 1.6A	1~1.6	20.8	TC1M06 / TC1M09	6 / 9
0.55	1.5	TCMS-32S 1.6A	1~1.6	20.8	TC1M06/TC1M09	6 / 9
0.75	1.9	TCMS-32S 2.5A	1.6~2.5	32.5	TC1M12	12
1.1	2.7	TCMS-32S 4A	2.5~4	52	TC1M16	16
1.5	3.6	TCMS-32S 4A	2.5~4	52	TC1M16	16
2.2	5.2	TCMS-32S 6A	4~6	78	TC1M16	16
3	6.8	TCMS-32S 8A	5~8	104	TC1M16	16
4	9	TCMS-32S 10A	6~10	130	TC1M16	16
5.5	11.5	TCMS-32H 13A	9~13	169	TC1M16	16
7.5	15.5	TCMS-32H 17A	11~17	221	TC1M16	16
10	20	TCMS-32H 22A	14~22	286	TC1D25	25
11	22	TCMS-32H 26A	18~26	338	TC1D25	25
15	29	TCMS-32H 32A	22~32	416	TC1D32	32
18.5	35	TCMS-63H 40A	28~40	520	TC1D50	50
22	41	TCMS-63H 50A	34~50	650	TC1D50	50
30	55	TCMS-63H 63A	45~63	819	TC1D65	65
37	67	TCMS-100S 75A	55~75	975	TC1D80	75
-	-	TCMS-100S 90A	70~90	1170	TC1D95	85
45	80	TCMS-100S 100A	80~100	1300	TC1D95	85

Definition type '2' coordination according to IEC 947-4-1

- The contactor or the starter must not endanger persons or systems in the event of a short-circuit.
- The contactor or the starter must be suitable for further use.
- No damage to the overload relay or other parts may occur with the exception of welding of the contactor or starter contacts provided that these can be easily separated without significant deformation (such as with a screwdriver).


Type "2" coordination according to IEC947-4-1/ IS13947-4-1

- Star Delta Feeders
- Short-circuit current $I_k = 50\text{kA}$
Voltage : 400 / 415V, 50/60Hz


Standard motors		Manual motor starter			Contactor	
AC-3 at 400/415V 1500rpm		Circuit breaker	Thermal overload release setting range	Magnetic release response current		
KW	A	Type	A	A	Type	A
3	6.8	TCMS-32S 4A	2.5 ~ 4	52	TC1M16/TC1-D18	16/18
4	9	TCMS-32S 6A	4 ~ 6	78	TC1M16/TC1-D18	16/18
5.5	11.5	TCMS-32S 8A	5 ~ 8	104	TC1M16/TC1-D18	16/18
7.5	15.5	TCMS-32S 10A	6 ~ 10	130	TC1-D18	18
10	20	TCMS-32H 13A	9 ~ 13	169	TC1-D18	18
11	22	TCMS-32H 17A	11 ~ 17	221	TC1-D25	25
15	29	TCMS-32H 22A	14 ~ 22	286	TC1-D25	25
18.5	35	TCMS-32H 26A	18 ~ 26	338	TC1-D32	32
22	41	TCMS-32H 22A	22~ 32	416	TC1-D40	40
30	55	TCMS-63H 40A	28~ 40	520	TC1-D40	40
37	67	TCMS-63H 50A	34~ 50	650	TC1-D50	50
45	80	TCMS-63H 50A	34 ~ 50	650	TC1-D50	50
55	97	TCMS-63H 63A	45 ~ 63	819	TC1-D65	65
75	132	TCMS-100S 90A	70 ~ 90	1170	TC1-D95	95
90	160	TCMS-100S 100A	80 ~ 100	1130	TC1-D95	95

Time/Current characteristic

**TCMS-32AF
Tripping Curve**

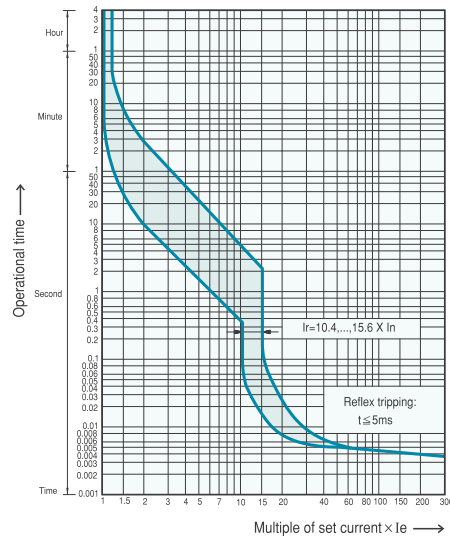

**TCMS-63, 100AF
Tripping Curve**

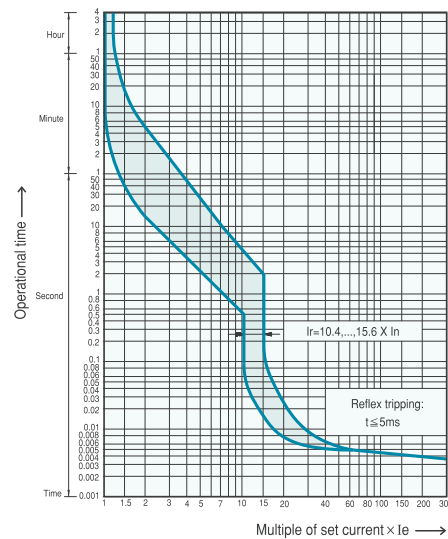

1. Thermal release trip current:

The adjustable inverse bimetal trip reliability protects motors against overloads.

The curve shows the mean operating current at an ambient temperature of 20°C starting from cold.

Careful testing and setting ensures effective motor protection even in the case of single-phasing.

2. Magnetic release trip current:

The instantaneous magnetic trip has a fixed operating current setting.




This corresponds to 13times the maximum value of setting range, at a lower setting it is correspondingly higher.

3. Current setting I_e :


The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1. If a different value is prescribed e.g. reduced I_e for cooling medium having a temperature higher than 40°C or a place of installation higher than 2000m above sea level) the setting current is equal to the reduced rated current I_e of the motor.

• TCMS 32H, 32HI

[mm]

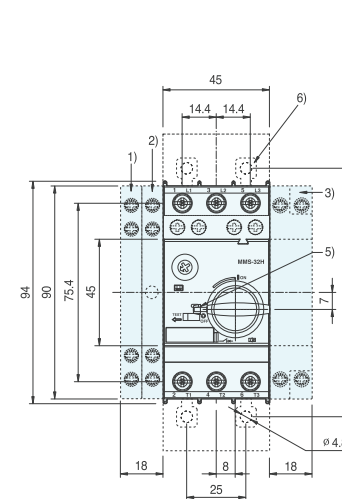


TCMS-32H/32HI+PB-32(2,3 Terminal)
PB-322(2 Terminal), PB-323(3 Terminal)

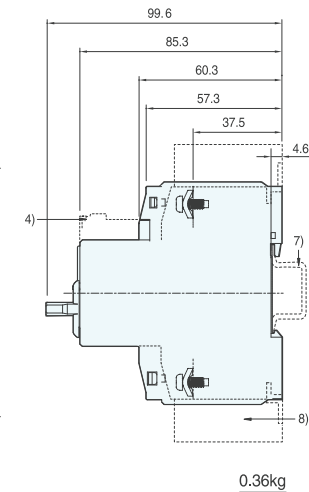

Height of arcing spaces
(Clearance from earthed parts)


$U_e[V]$	240	415	460	525	690
[mm]	30	30	30	30	50




Dimensions

● TCMS

[mm]

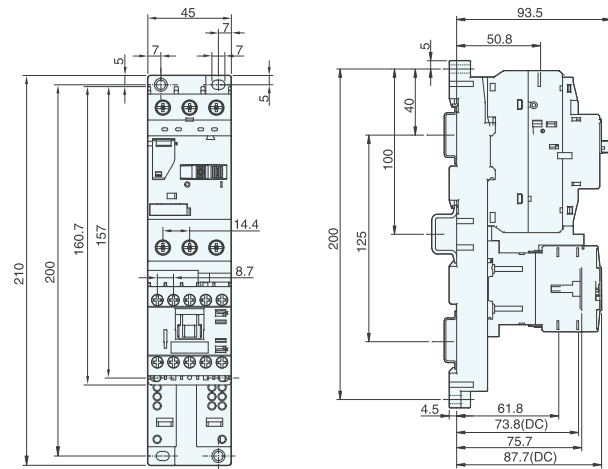

TCMS-32S+TCM06-16



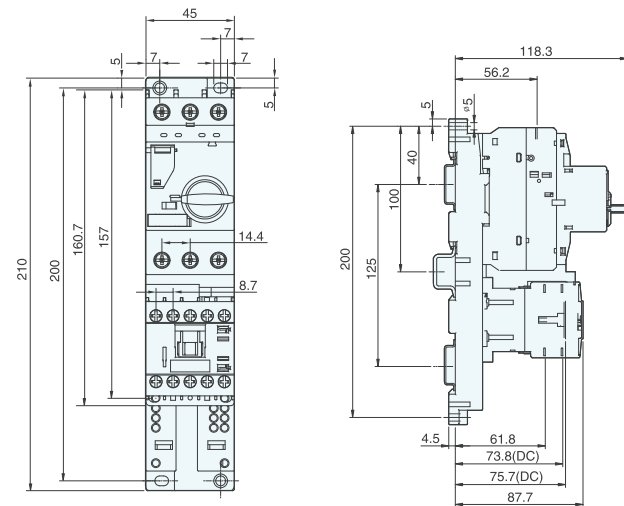


TCMS-32H+TCM06-16

Dimensions

● TCMS 63S, 63H, 63HI

[mm]

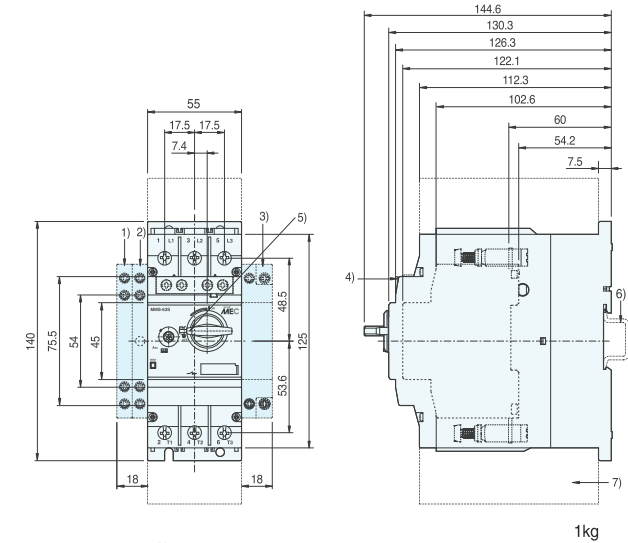


TCMS-63S/H/HI+ PB-63(2,3 Terminal)
PB-632(2 Terminal), PB-633(3 Terminal)

- 1) Side auxiliary switch
- 2) Side magnetic trip alarm switch
- 3) Side shunt release or Side undervoltage release
- 4) Front auxiliary switch
- 5) Handle lock in OFF position (ø 5mm)
- 6) 35mm standard mounting rail acc. to EN 50 022
- 7) Arcing space

Height of arcing spaces
(Clearance from earthed parts)



Ue[V]	240	415	460	525	690
[mm]	50	50	50	50	50



Dimensions

● TCMS 100S, 100H, 100HI

[mm]

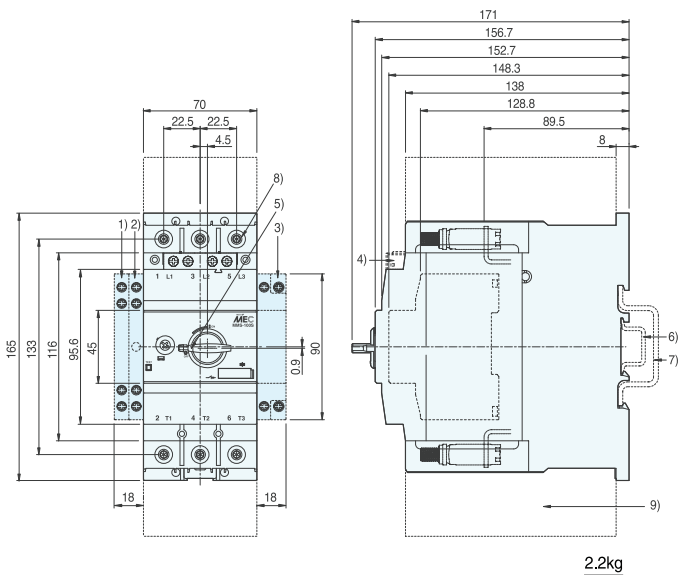


Height of arcing spaces
(Clearance from earthed parts)

Ue[V]	240	415	460	525	690
[mm]	50	70	70	110	150

Dimensions

● E-Handle

[mm]

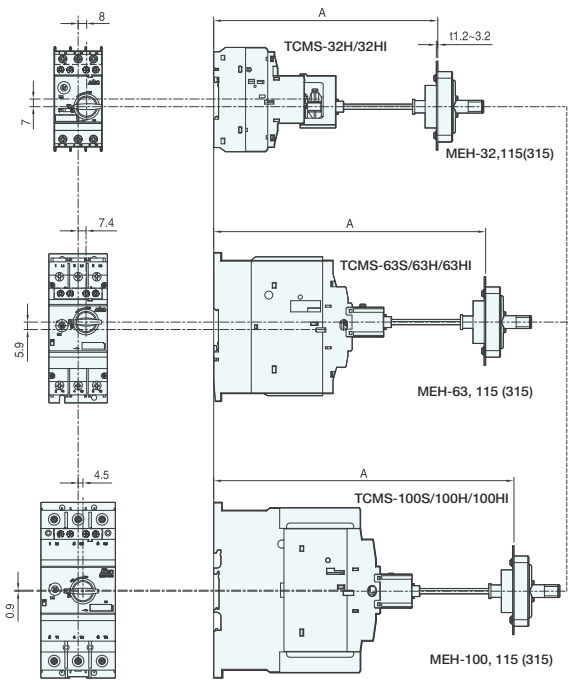

E-Handle Type	A(mm)	TCMS Type
MEH-32, 115	min : 148,6 max:210,6(Shaft 115mm)	TCMS-32H/32HI
MEH-32, 315	min : 148,6 max:410,6(Shaft 315mm)	
MEH-63, 115	min : 193,6 max:255,6(Shaft 115mm)	TCMS-63S/63H/63HI
MEH-63, 315	min : 193,6 max:455,6(Shaft 315mm)	
MEH-100, 115	min : 220 max:282(Shaft 115mm)	TCMS-100S/100H/100HI
MEH-100, 315	min : 220 max:482(Shaft 315mm)	

