




**PROTEKSINDO
GOODRUN**

PT. POWERINDO PRIMA PERKASA

PRODUCT CATALOGUE

FHRW SERIES

OUTDOOR AC MEDIUM VOLTAGE FUSE CUTOUT

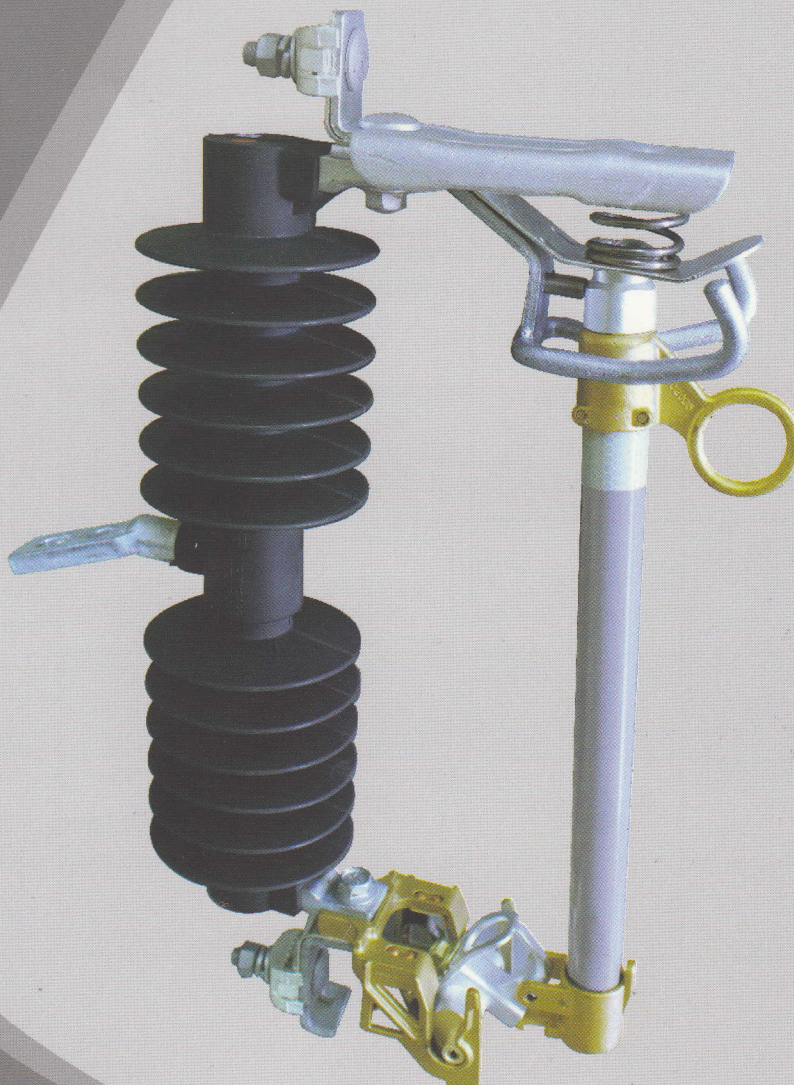


Management
System
ISO 9001:2008

www.tuv.com
ID 9105044484



FHRW SERIES


DIMENSION DRAWING AND TECHNICAL PARAMETER

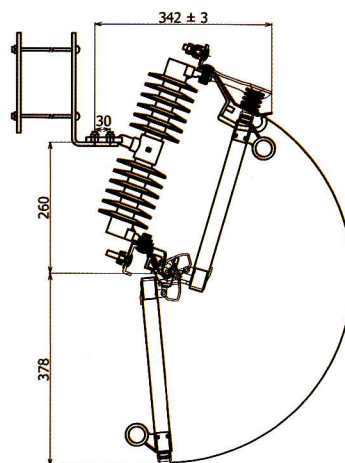

PARAMETER TYPE	FHRW - 24		FHRW - 27	
	FHRW 24-100	FHRW 24-200	FHRW 27-100	FHRW 27-200
RATED VOLTAGE (KV)	24	24	27	27
RATED CURRENT (A)	100	200	100	200
RATED FREQUENCY (Hz)	50	50	50	50
RATED BREAKING (ASYM) CURRENT (KA)	12.5	12.5	12.5	12.5
POWER FREQUENCY WITHSTAND VOLTAGE (DRY TEST) (KV)	65	65	65	65
POWER FREQUENCY WITHSTAND VOLTAGE (WET TEST) (KV)	50	50	50	50
RATED LIGHTING IMPULSE WITHSTAND VOLTAGE (B I L) (KV)	125	125	125	125
MECHANICAL LIFE TIME (TIMES)	500	500	500	500
CREEPAGE DISTANCE (mm)	575	575	575	575
WEIGHT (Kg)	4.2	4.2	4.2	4.2

FUSE LINK

DRAWING AND SELECTION TABLE

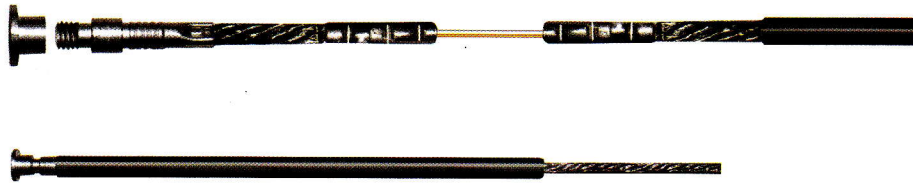

TABEL PEMILIHAN FUSE LINK sebagai berikut :


	1 PHASE/ CSP TRAF0			3 PHASE									
DAYA TRAF0 (KVA)	16	25	50	25	50	100	160	200	250	315	400	500	630
ARUS PENGENAL TRAF0 (A)	1,39	2,17	4,33	0,72	1,45	2,89	4,62	5,77	7,22	9,10	11,55	14,43	18,2
ARUS (A) PENGENAL FUSE LINK	2	4	6	2	4	6	10	15	15	20	20	25	30




Breaking Test Report Fuse Cutout



Sertifikat Sistem Pegawasan Mutu



Type Test Report LMK / PLN



Weather Aging Test Report
HV 1560 Silicone Rubber



PT. POWERINDO PRIMA PERKASA

HEAD OFFICE & FACTORY

Jl. Raya Siliwangi Kel. Alam Jaya, Kec. Jatiuwung
Tangerang, Banten - Indonesia

Phone : +62-21 59319009 | Fax : +62-21 59319010

e-mail : sales@powerindoperkasa.com

■ ■ ■ Made in Indonesia ■ ■ ■