

We touch your **electricity** everyday!

WiNtrip



Final Distribution Products

C&S Electric Ltd. is amongst the leading suppliers of electrical equipment in India and is India's largest exporter of industrial switchgear. It's wide range of electrical and electronic products find application in power generation, distribution, control, protection and final consumption.





Contents

WiNtrip - Miniature Circuit Breaker

Introduction	04
Highlights	06
Features - Construction	07
Technical Data	08
Product Reference - MCB	10
Product Reference - Isolator	12
Accessories	12
Dimensions	13
MCB Type Changeover Switch	14

WiNtrip 2 - Miniature Circuit Breaker



Technical Data	15
Product Reference - MCB	16
Product Reference - Isolator & DC MCB	18
Dimensions	18

WiNtrip Residual Current Circuit Breaker

Introduction	19
Highlights	20
Technical Data	21
Features - Performance	22
Product Reference - RCCB	24
Dimensions	25

WiNtrip Distribution Board

Introduction	26
Features	28
Highlights	30
Dimensions	32

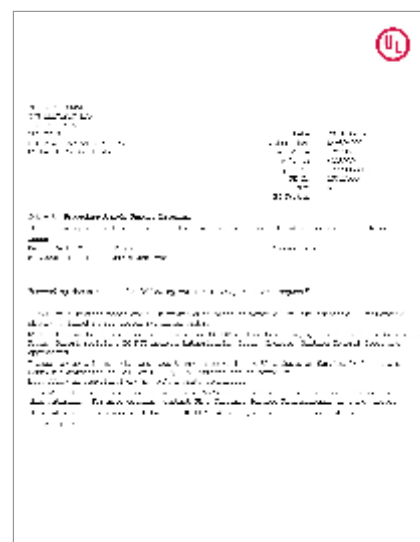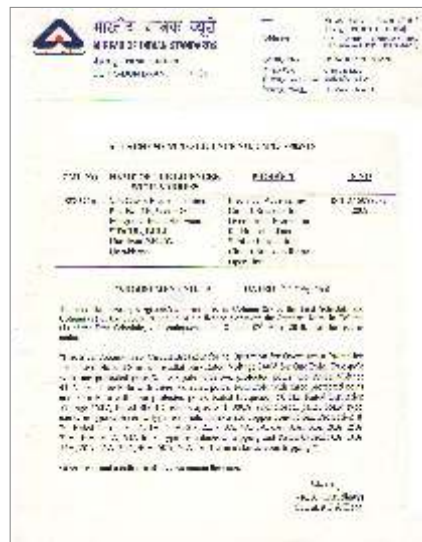

WiNtrip

Miniature Circuit Breaker

As power distribution needs play a pivotal role in all the significant sectors namely Commercial, Industrial and Residential, improved Breaker performance through better electrical safety, higher operational endurance, continued service and reduced cost have become of paramount importance. C&S WiNtrip MCBs have been engineered to constantly fulfill the above requirements. With these features C&S is setting new standards for user friendly and superlative electrical circuit protection.

The C&S WiNtrip MCB is a high performing Thermal Magnetic current limiting device with the ability to disconnect short circuits up to 10kA. The range is available in tripping characteristics types B, C and D for 1P, 1P+N, 2P, 3P, 3P+N & 4P configurations in 0.5 - 125A current ratings.

All metal components for operating mechanism of WiNtrip circuit breaker are specially treated for high self lubrication leading to repeat accuracy during service life. The MCBs conform to Standards: IEC 60898-1:1995 and IS/IEC 60898-1:2002 and stand guaranteed for best quality for optimum performance.

Also includes

- Auxiliary Contacts & Shunt Trip
- RCCB and
- Distribution Boards



IS/IEC60898-1-2002



CM / L-8885716



RoHS
Compliant

Safe | Convenient | Energy Saving | Wide range

IP 20 Degree Protection	Terminals are finger touch proof. Prevents electrical shock by accidental touch.	
Trip Free Mechanism	MCB trips even if held in ON position.	
Padlocking Facility	Dolly can be padlocked in - OFF position for personal safety during maintenance - ON positing for extremely critical loads	
Current Limiting Design - Class 3	Minimum let through energy under fault condition due to ultra fast contact separation and rapid quenching of the arc. This reduces stress on connected loads and cables.	
High Terminal Capacity with Deep Serrations	Ensures proper termination and firm connection to accommodate 35 sq mm cable.	
Bi-connect Termination Possible	Choice to use Busbar and/or cable in the same terminal, provides reliable termination	
Din Rail Mounting	Two stage snapping device for simple effortless and firm seating on 35 mm Din Rail, easy & efficient mounting.	
Combination Head Captive Screws	Safe and provides the flexibility of both +/- Head screw driver.	
Low Power Consumption	Cost effective and energy saving. The Watt loss of Wintrip MCBs is extremely low providing valuable energy savings over its entire life cycle.	
Legend Plate	Ensures circuit identification and enhanced safety	
Wide range	0.5 to 125A 1P, 1P+N, 2P, 3P, 3P+N & 4P configurations B, C & D Tripping Characteristic	
Air circulation	When two poles are placed adjacent to each other, these channels form a tunnel resulting in effective air circulation around individual poles.	
2 Position dolly	Clear indication of the operational status of device.	

Features - Construction



Housing

WiNtrip MCBs are made up of engineered thermo plastic for self lubrication and critical performance. The housing and other moulded components are fire retardant having high melting point, low water absorption and high dielectric strength therefore enabling it to withstand high temperature.

Operating Mechanism

WiNtrip Circuit Breakers are based on Thermal Magnetic technology. The protection is ensured by combining a temperature receptive mechanism (bimetal) and a current sensitive electro-magnetic device. The thermal operation provides protection from normal overload and the electro-magnetic device against large overloads and short circuits.

Superior Contact Mechanism

The mechanism comprises of fixed and moving contacts made up of silver graphite for surety, extended life span and anti-weld properties. These contacts have low contact resistance resulting in reduced voltage drop and low watt loss commensurating to energy savings.

High Tech Arc Blower

Protects from hazards of overloads and short-circuits. The arc under the influence of magnetic field is moved into the arc chute where it is quickly extinguished and quenched.

Maximum Backup Protection

To protect the WiNtrip circuit breakers against higher short circuit current, fuses should be installed at the incoming side. The current rating of these fuse links should not be more than the values stated in the table.

MCB Rating	Back-up Fuse Rating
1A	25A
4A	50A
6A	80A
10A	100A
63A	100A

Legend Plate

Easy identification of circuits irrespective of position on the Distribution Board. Very useful during maintenance. A unique feature.

Watt Loss

Rating (Amp)	As per IS/IEC60898-1:2002 Maximum watt loss	Maximum watt loss in SP
6	3.0W	0.76W
10	3.0W	1.83W
16	3.5W	2.44W
20	4.5W	3.07W
25	4.5W	2.80W
32	6.0W	3.92W
40	7.5W	3.96W
63	13.0W	6.06W

Technical Data - Characteristics

MCB-AC	WiNtrip MCB			WiNtrip Isolator
Standard Conformity	IS/IEC60898-1-2002			IS/IEC60947-3
Type	B	C	D	
Rated Current (In)	6-63A	0.5-125A	0.5-63A	25-125A
Rated Voltage AC (Ue)	240/415V			240/415V
Utilization Category				AC22A
Rated Frequency Hz	50/60Hz			50Hz
No. of Poles (Execution)	1P, 1P+N, 2P, 3P, 3P+N & 4P			1P, 2P, 3P & 4P
Rated Short Circuit Breaking Capacity	10kA	10kA	10kA	
Rated Insulation Voltage (Ui)	660V			660V
Magnetic Release Setting	(3-5)In	(5-10)In	(10-20)In	
Rated Impulse Voltage (Uimp)	4kV			6kV
Electrical/Mechanical Life				
<32A	30,000			30,000
>32A	10,000			10,000
Ambient Temperature	-5°C to +55°C			-5°C to +55°C
Energy Limiting Class	ELC 3			
Mounting	Clip on Din rail (35 mm x 7.5 mm)			
Line Terminal Capacity	35 mm ²			35 mm ²
Degree of Protection	IP 20			IP 20
Resistance to Shock	40mm free fall			40mm free fall
Ambient reference temperature	30°C			
Installation Position	Vertical/Horizontal			Vertical/Horizontal


MCB-DC

Circuit Breakers for DC application are engineered to fulfill tough arc quenching conditions. DC MCB incorporates built in magnet to direct the arc into the arc quenching chamber.

Specifications

Standard Conformity	IEC 60898-2
Current Rating	0.5-63A
No. of Poles	1P & 2P
Voltage Rating	220V (max.)
Short Circuit Breaking Capacity	10kA

Technical Data - Tripping Curves

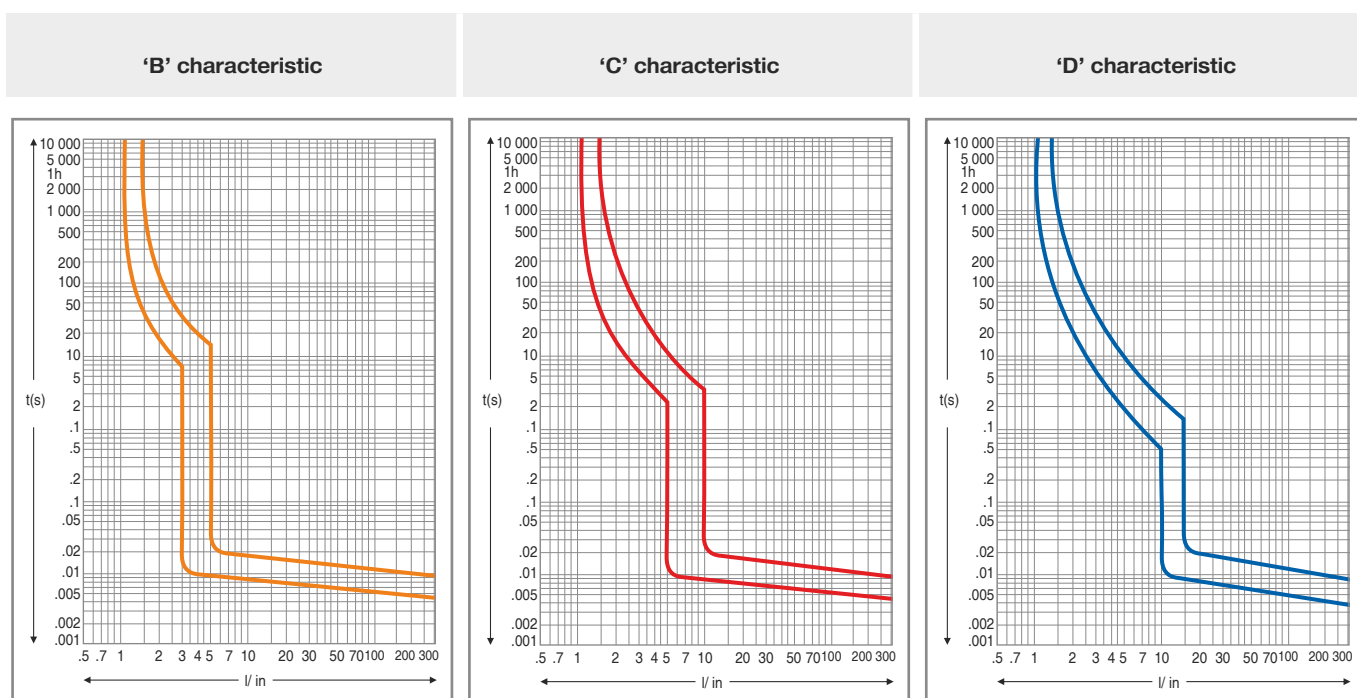

Type	Application	Thermal Test Current		Tripping Time $I_{n} \leq 63A$	Electro Magnetic Test Current		Tripping Time (t)
		Low	High				
B	Lighting & Distribution with no surge Current	1.13xI _n		>1hour	3xI _n		≥0.1s
			1.45xI _n	<1hour		5xI _n	<0.1s
C	Inductive Load with surge Current	1.13xI _n		>1hour	5xI _n		≥0.1s
			1.45xI _n	<1hour		10xI _n	<0.1s
D	High Inductive Load & High Inrush Current	1.13xI _n		>1hour	10xI _n		≥0.1s
			1.45xI _n	<1hour		20xI _n	<0.1s

Temperature derating

In plant engineering situations, where ambient temperature is higher than the regulatory reference temperature of 30°C, the circuit breakers may be subjected to untimely tripping, i.e. opening when not required, since the increase in temperature is interpreted as a current surge. Ambient temperature, as a matter of fact, affects the initial deformation of the bimetal. At a temperature above 30° C the thermal release trips faster, behaving like a relay with a lower nominal current. It is therefore imperative to take into account nominal current derating if the circuit breaker is installed in an ambient temperature above 30°C.

The table gives the max. operating current referring to the different temperatures.

I _n (A)	Temperature					
	25°C	30°C	35°C	40°C	45°C	50°C
2	2.04	2	1.96	1.9	1.86	1.82
6	6.24	6	5.82	5.52	5.28	4.98
10	10.40	10	9.7	9.2	8.8	8.3
16	16.5	16	15.5	15	14.4	14.1
20	20.6	20	19.4	18.8	18	17.6
25	25.8	25	24.3	23.5	22.5	22
32	33	32	31.04	30.1	28.8	28.2
40	41.2	40	38.8	37.6	36	35.2
63	64.89	63	61.79	60	58	56.07

Product Reference - MCB



Single Pole

Description	In(A)	Reference		
		'B' Curve	'C' Curve	'D' Curve
Single Pole 	0.5		CSMB1C0.5	CSMB1D0.5
	1		CSMB1C1	CSMB1D1
	2		CSMB1C2	CSMB1D2
	3		CSMB1C3	CSMB1D3
	4		CSMB1C4	CSMB1D4
	5		CSMB1C5	CSMB1D5
	6	CSMB1B6	CSMB1C6	CSMB1D6
	10	CSMB1B10	CSMB1C10	CSMB1D10
	16	CSMB1B16	CSMB1C16	CSMB1D16
	20	CSMB1B20	CSMB1C20	CSMB1D20
	25	CSMB1B25	CSMB1C25	CSMB1D25
	32	CSMB1B32	CSMB1C32	CSMB1D32
	40	CSMB1B40	CSMB1C40	CSMB1D40
	50	CSMB1B50	CSMB1C50	CSMB1D50
	63	CSMB1B63	CSMB1C63	CSMB1D63
	80		CSMB1C80	
	100		CSMB1C100	
	125		CSMB1C125	
Single Pole + Neutral 	0.5		CSMB1C0.5N	CSMB1D0.5N
	1		CSMB1C1N	CSMB1D1N
	2		CSMB1C2N	CSMB1D2N
	3		CSMB1C3N	CSMB1D3N
	4		CSMB1C4N	CSMB1D4N
	5		CSMB1C5N	CSMB1D5N
	6	CSMB1B6N	CSMB1C6N	CSMB1D6N
	10	CSMB1B10N	CSMB1C10N	CSMB1D10N
	16	CSMB1B16N	CSMB1C16N	CSMB1D16N
	20	CSMB1B20N	CSMB1C20N	CSMB1D20N
	25	CSMB1B25N	CSMB1C25N	CSMB1D25N
	32	CSMB1B32N	CSMB1C32N	CSMB1D32N
	40	CSMB1B40N	CSMB1C40N	CSMB1D40N
	50	CSMB1B50N	CSMB1C50N	CSMB1D50N
	63	CSMB1B63N	CSMB1C63N	CSMB1D63N
	80			
	100			
	125			
Double Pole 	0.5		CSMB2C0.5	CSMB2D0.5
	1		CSMB2C1	CSMB2D1
	2		CSMB2C2	CSMB2D2
	3		CSMB2C3	CSMB2D3
	4		CSMB2C4	CSMB2D4
	5		CSMB2C5	CSMB2D5
	6	CSMB2B6	CSMB2C6	CSMB2D6
	10	CSMB2B10	CSMB2C10	CSMB2D10
	16	CSMB2B16	CSMB2C16	CSMB2D16
	20	CSMB2B20	CSMB2C20	CSMB2D20
	25	CSMB2B25	CSMB2C25	CSMB2D25
	32	CSMB2B32	CSMB2C32	CSMB2D32
	40	CSMB2B40	CSMB2C40	CSMB2D40
	50	CSMB2B50	CSMB2C50	CSMB2D50
	63	CSMB2B63	CSMB2C63	CSMB2D63
	80		CSMB2C80	
	100		CSMB2C100	
	125		CSMB2C125	



Single Pole + Neutral



Double Pole



Three Pole

Three Pole



0.5
1
2
3
4
5
6
10
16
20
25
32
40
50
63
80
100
125

'B' Curve

Reference

'C' Curve

'D' Curve


CSMB3C0.5
CSMB3C1
CSMB3C2
CSMB3C3
CSMB3C4
CSMB3C5
CSMB3C6
CSMB3C10
CSMB3C16
CSMB3C20
CSMB3C25
CSMB3C32
CSMB3C40
CSMB3C50
CSMB3C63
CSMB3C80
CSMB3C100
CSMB3C125

CSMB3D0.5
CSMB3D1
CSMB3D2
CSMB3D3
CSMB3D4
CSMB3D5
CSMB3D6
CSMB3D10
CSMB3D16
CSMB3D20
CSMB3D25
CSMB3D32
CSMB3D40
CSMB3D50
CSMB3D63



Three Pole + Neutral

Three Pole
+ Neutral



0.5
1
2
3
4
5
6
10
16
20
25
32
40
50
63
80
100
125

CSMB3B6N
CSMB3B10N
CSMB3B16N
CSMB3B20N
CSMB3B25N
CSMB3B32N
CSMB3B40N
CSMB3B50N
CSMB3B63N


CSMB3C0.5N
CSMB3C1N
CSMB3C2N
CSMB3C3N
CSMB3C4N
CSMB3C5N
CSMB3C6N
CSMB3C10N
CSMB3C16N
CSMB3C20N
CSMB3C25N
CSMB3C32N
CSMB3C40N
CSMB3C50N
CSMB3C63N
CSMB3C80N
CSMB3C100N
CSMB3C125N

CSMB3D0.5N
CSMB3D1N
CSMB3D2N
CSMB3D3N
CSMB3D4N
CSMB3D5N
CSMB3D6N
CSMB3D10N
CSMB3D16N
CSMB3D20N
CSMB3D25N
CSMB3D32N
CSMB3D40N
CSMB3D50N
CSMB3D63N



Four Pole

Four Pole



0.5
1
2
3
4
5
6
10
16
20
25
32
40
50
63
80
100
125

CSMB4B6
CSMB4B10
CSMB4B16
CSMB4B20
CSMB4B25
CSMB4B32
CSMB4B40
CSMB4B50
CSMB4B63

CSMB4C0.5
CSMB4C1
CSMB4C2
CSMB4C3
CSMB4C4
CSMB4C5
CSMB4C6
CSMB4C10
CSMB4C16
CSMB4C20
CSMB4C25
CSMB4C32
CSMB4C40
CSMB4C50
CSMB4C63
CSMB4C80
CSMB4C100
CSMB4C125

CSMB4D0.5
CSMB4D1
CSMB4D2
CSMB4D3
CSMB4D4
CSMB4D5
CSMB4D6
CSMB4D10
CSMB4D16
CSMB4D20
CSMB4D25
CSMB4D32
CSMB4D40
CSMB4D50
CSMB4D63

Product Reference - Isolator & Accessories



Single Pole



Double Pole



Three Pole



Four Pole

Description	In(A)	Reference
Single Pole 	25	CSMB1ISO25
	40	CSMB1ISO40
	63	CSMB1ISO63
	80	CSMB1ISO80
	100	CSMB1ISO100
	125	CSMB1ISO125
Double Pole 	25	CSMB2ISO25
	40	CSMB2ISO40
	63	CSMB2ISO63
	80	CSMB2ISO80
	100	CSMB2ISO100
	125	CSMB2ISO125
Three Pole 	25	CSMB3ISO25
	40	CSMB3ISO40
	63	CSMB3ISO63
	80	CSMB3ISO80
	100	CSMB3ISO100
	125	CSMB3ISO125
Four Pole 	25	CSMB4ISO25
	40	CSMB4ISO40
	63	CSMB4ISO63
	80	CSMB4ISO80
	100	CSMB4ISO100
	125	CSMB4ISO125

Accessories

Auxiliary Contact

Attachment fitted with MCB (left side) used for interlocking, signaling and indication. The auxiliary switch is switched on or off along with the MCB through internal linkage.

Specifications

Standard Conformity	IEC 60947-1
Current Rating	6A
Voltage Rating	240V AC
Contact Configuration	1NO + 1NC
Protection	IP 20
Electrical Endurance (nos)	10000
Fitment	Factory/Site Fitted

Shunt Trip



Controls the remote tripping of the MCB to which it is attached (Right Side).

Specifications



Standard Conformity	IEC 60947-1
Rated Voltage AC	110V, 220V
DC	12V, 24V, 48V
Operating Voltage	70-110% of Rated Voltage
Protection	IP 20
Electrical Endurance (nos)	10000
Fitment	Factory/Site Fitted

Dimensions

Installation Dimensions - MCB (.05 to 63A) / Isolator (25 to 63A)

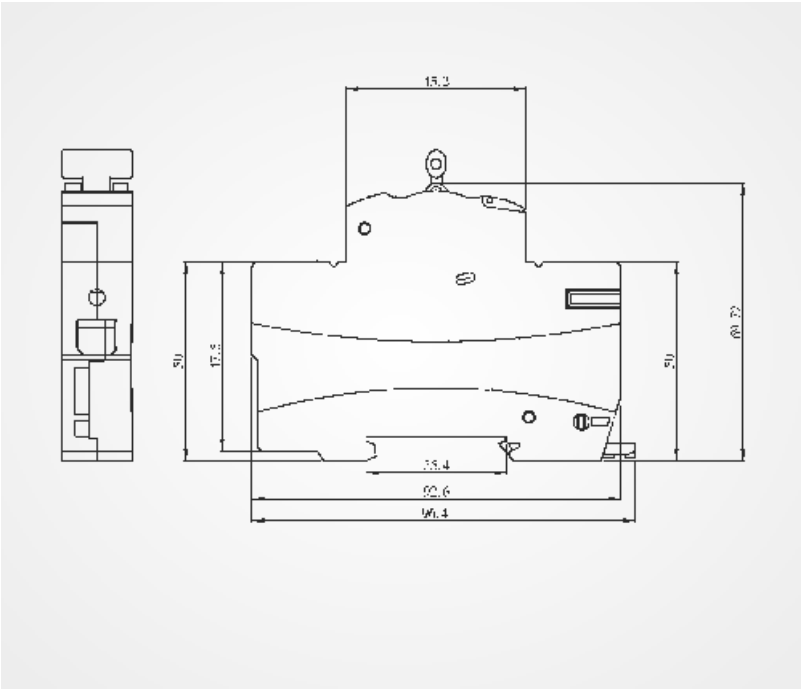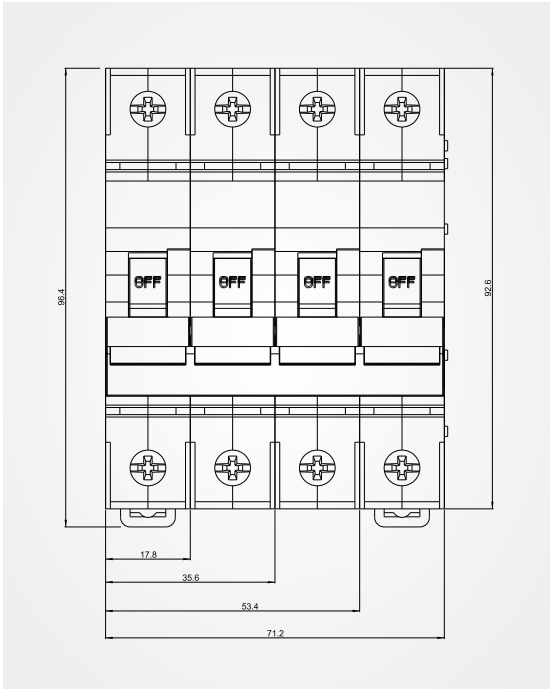

Installation Dimensions MCB (80 to 125A)

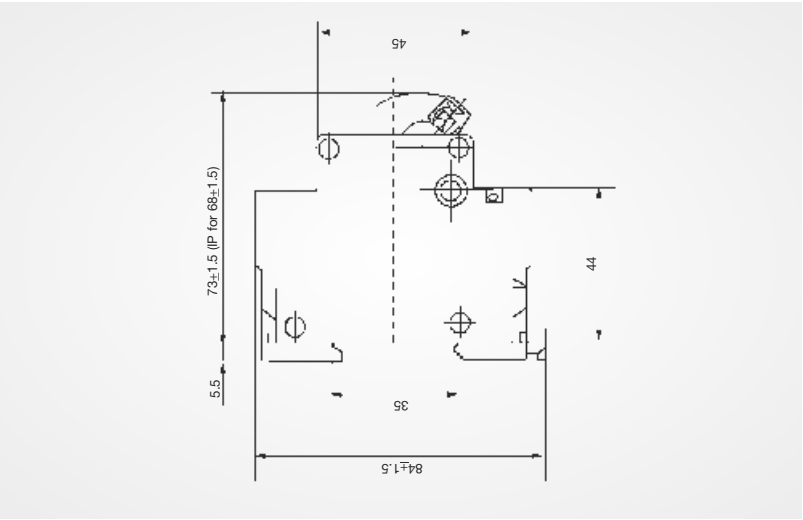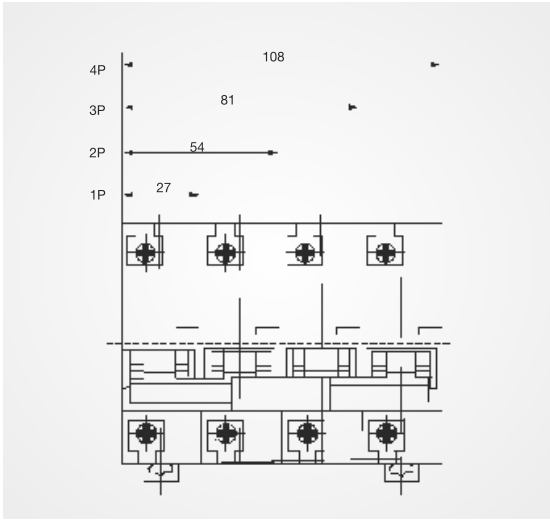




Two way centre OFF Changeover Switch

Proven & trusted product from C&S WiNtrip

Feature

- Compact Design
- Double Break Contacts
- Shrouded Terminal
- Can be Mounted with other products like MCB, RCCB, Isolator in Distribution Board
- Front Operation with three positions
I-O-II Mid position OFF

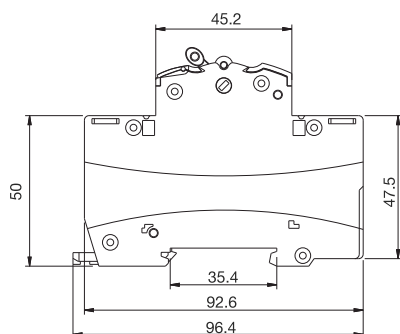

Technical Data

Standard: IS/IEC60947-3:1999

No. of Pole: 2P & 4P

Rated operational voltage: 240 / 415V

Rated current: 25A & 40A

Rated frequency: 50Hz

Rated insulation voltage: 660V

Dielectric Strength: 2.5KV

Rated impulse Voltage: 4KV

Utilization Categories: AC 22A

Working Temperature: -5°C to +55°C


Mechanical Life: 15000

Electrical Life: 10000

Mounting: Clip on din rail

Mounting Position: Vertical / Horizontal

Terminal capacity: 16mm²

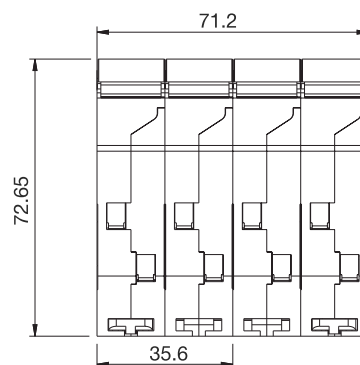

WiNtrip 2

Miniature Circuit Breaker

Technical Data

MCB-AC

Specifications	WiNtrip2 MCB			WiNtrip2 Isolator
Type	'B'	'C'	'D'	
Standard Conformity	IS/IEC60898-1-2002			IEC60947-3
Rated Current (In)	6-63A	0.5-63A	0.5-63A	25-63A
Rated Voltage AC (Ue)	240/415V			240/415V
Utilization Category	–			AC22A
Rated Frequency Hz	50/60Hz			50/60Hz
No. of Poles (Execution)	1P, 1P+N, 2P, 3P, 3P+N & 4P			1P, 2P, 3P & 4P
Rated Short Circuit Breaking Capacity	10kA, 6kA			–
Rated Insulation Voltage (Ui)	660V			660V
Magnetic Release Setting	(3-5)In	(5-10)In	(10-20)In	
Rated Impulse Voltage (Uimp)	4kV			6kV
Electrical/Mechanical Life	30,000			30,000
<32A	30,000			30,000
>32A	10,000			10,000
Energy Limiting Class	ELC 3			
Mounting	Clip on Din rail (35x7.5 mm)			Clip on Din rail (35x7.5 mm)
Line Terminal Capacity	35 mm ²			35 mm ²
Load Terminal Capacity	35 mm ²			35 mm ²
Degree of Protection	IP 20			IP 20
Resistance to Shock	40mm free fall			40mm free fall
Ambient working temperature	- 5°C to 55°C			
Ambient reference temperature	30°C			
Installation Position	Vertical/Horizontal			Vertical/Horizontal
Bi-connect terminal	Both side			Both side

Operational voltage (Un): 240/415V, 50/60Hz can be used in systems upto 60V DC in SP and 110V DC in 2P

Breaking Capacity: 10KA as per IS/IEC 60898-1

MCB-DC

Circuit Breakers for DC application are engineered to fulfill tough arc quenching conditions. DC MCB incorporates built in magnet to direct the arc into the arc quenching chamber.

Specifications	WiNtrip2 MCB
Standard Conformity	IS/IEC60898-2-2003
Current Rating	0.5-63A
No. of Poles	1P & 2P
Voltage Rating	220V (max.)
Short Circuit Breaking Capacity	10kA

Product Reference - MCB



Rating (A)	'B' Curve	'C' Curve	'D' Curve
	Reference	Reference	Reference
1 Pole			
0.5	-	CSMBS1C0.5	CSMBS1D0.5
01	-	CSMBS1C1	CSMBS1D1
02	-	CSMBS1C2	CSMBS1D2
03	-	CSMBS1C3	CSMBS1D3
04	-	CSMBS1C4	CSMBS1D4
05	-	CSMBS1C5	CSMBS1D5
06	CSMBS1B6	CSMBS1C6	CSMBS1D6
10	CSMBS1B10	CSMBS1C10	CSMBS1D10
16	CSMBS1B16	CSMBS1C16	CSMBS1D16
20	CSMBS1B20	CSMBS1C20	CSMBS1D20
25	CSMBS1B25	CSMBS1C25	CSMBS1D25
32	CSMBS1B32	CSMBS1C32	CSMBS1D32
40	CSMBS1B40	CSMBS1C40	CSMBS1D40
50	CSMBS1B50	CSMBS1C50	CSMBS1D50
63	CSMBS1B63	CSMBS1C63	CSMBS1D63
2 Pole			
0.5	-	CSMBS2C0.5	CSMBS2D0.5
01	-	CSMBS2C1	CSMBS2D1
02	-	CSMBS2C2	CSMBS2D2
03	-	CSMBS2C3	CSMBS2D3
04	-	CSMBS2C4	CSMBS2D4
05	-	CSMBS2C5	CSMBS2D5
06	CSMBS2B6	CSMBS2C6	CSMBS2D6
10	CSMBS2B10	CSMBS2C10	CSMBS2D10
16	CSMBS2B16	CSMBS2C16	CSMBS2D16
20	CSMBS2B20	CSMBS2C20	CSMBS2D20
25	CSMBS2B25	CSMBS2C25	CSMBS2D25
32	CSMBS2B32	CSMBS2C32	CSMBS2D32
40	CSMBS2B40	CSMBS2C40	CSMBS2D40
50	CSMBS2B50	CSMBS2C50	CSMBS2D50
63	CSMBS2B63	CSMBS2C63	CSMBS2D63
3 Pole			
0.5	-	CSMBS3C0.5	CSMBS3D0.5
01	-	CSMBS3C1	CSMBS3D1
02	-	CSMBS3C2	CSMBS3D2
03	-	CSMBS3C3	CSMBS3D3
04	-	CSMBS3C4	CSMBS3D4
05	-	CSMBS3C5	CSMBS3D5
06	CSMBS3B6	CSMBS3C6	CSMBS3D6
10	CSMBS3B10	CSMBS3C10	CSMBS3D10
16	CSMBS3B16	CSMBS3C16	CSMBS3D16
20	CSMBS3B20	CSMBS3C20	CSMBS3D20
25	CSMBS3B25	CSMBS3C25	CSMBS3D25
32	CSMBS3B32	CSMBS3C32	CSMBS3D32
40	CSMBS3B40	CSMBS3C40	CSMBS3D40
50	CSMBS3B50	CSMBS3C50	CSMBS3D50
63	CSMBS3B63	CSMBS3C63	CSMBS3D63



Rating (A)	'B' Curve	'C' Curve	'D' Curve
	Reference	Reference	Reference
4 Pole			
0.5	-	CSMBS4C0.5	CSMBS4D0.5
01	-	CSMBS4C1	CSMBS4D1
02	-	CSMBS4C2	CSMBS4D2
03	-	CSMBS4C3	CSMBS4D3
04	-	CSMBS4C4	CSMBS4D4
05	-	CSMBS4C5	CSMBS4D5
06	CSMBS4B6	CSMBS4C6	CSMBS4D6
10	CSMBS4B10	CSMBS4C10	CSMBS4D10
16	CSMBS4B16	CSMBS4C16	CSMBS4D16
20	CSMBS4B20	CSMBS4C20	CSMBS4D20
25	CSMBS4B25	CSMBS4C25	CSMBS4D25
32	CSMBS4B32	CSMBS4C32	CSMBS4D32
40	CSMBS4B40	CSMBS4C40	CSMBS4D40
50	CSMBS4B50	CSMBS4C50	CSMBS4D50
63	CSMBS4B63	CSMBS4C63	CSMBS4D63
1Pole + Neutral			
0.5	-	CSMBS1C0.5N	CSMBS1D0.5N
01	-	CSMBS1C1N	CSMBS1D1N
02	-	CSMBS1C2N	CSMBS1D2N
03	-	CSMBS1C3N	CSMBS1D3N
04	-	CSMBS1C4N	CSMBS1D4N
05	-	CSMBS1C5N	CSMBS1D5N
06	CSMBS1B6N	CSMBS1C6N	CSMBS1D6N
10	CSMBS1B10N	CSMBS1C10N	CSMBS1D10N
16	CSMBS1B16N	CSMBS1C16N	CSMBS1D16N
20	CSMBS1B20N	CSMBS1C20N	CSMBS1D20N
25	CSMBS1B25N	CSMBS1C25N	CSMBS1D25N
32	CSMBS1B32N	CSMBS1C32N	CSMBS1D32N
40	CSMBS1B40N	CSMBS1C40N	CSMBS1D40N
50	CSMBS1B50N	CSMBS1C50N	CSMBS1D50N
63	CSMBS1B63N	CSMBS1C63N	CSMBS1D63N
3 Pole + Neutral			
0.5	-	CSMBS3C0.5N	CSMBS3D0.5N
01	-	CSMBS3C1N	CSMBS3D1N
02	-	CSMBS3C2N	CSMBS3D2N
03	-	CSMBS3C3N	CSMBS3D3N
04	-	CSMBS3C4N	CSMBS3D4N
05	-	CSMBS3C5N	CSMBS3D5N
06	CSMBS3B6N	CSMBS3C6N	CSMBS3D6N
10	CSMBS3B10N	CSMBS3C10N	CSMBS3D10N
16	CSMBS3B16N	CSMBS3C16N	CSMBS3D16N
20	CSMBS3B20N	CSMBS3C20N	CSMBS3D20N
25	CSMBS3B25N	CSMBS3C25N	CSMBS3D25N
32	CSMBS3B32N	CSMBS3C32N	CSMBS3D32N
40	CSMBS3B40N	CSMBS3C40N	CSMBS3D40N
50	CSMBS3B50N	CSMBS3C50N	CSMBS3D50N
63	CSMBS3B63N	CSMBS3C63N	CSMBS3D63N



Rating (A)	'B' Curve	'C' Curve	'D' Curve
	Reference	Reference	Reference
1 Pole			
0.5	-	CSMBS1C0.5X	CSMBS1D0.5X
01	-	CSMBS1C1X	CSMBS1D1X
02	-	CSMBS1C2X	CSMBS1D2X
03	-	CSMBS1C3X	CSMBS1D3X
04	-	CSMBS1C4X	CSMBS1D4X
05	-	CSMBS1C5X	CSMBS1D5X
06	CSMBS1B6X	CSMBS1C6X	CSMBS1D6X
10	CSMBS1B10X	CSMBS1C10X	CSMBS1D10X
16	CSMBS1B16X	CSMBS1C16X	CSMBS1D16X
20	CSMBS1B20X	CSMBS1C20X	CSMBS1D20X
25	CSMBS1B25X	CSMBS1C25X	CSMBS1D25X
32	CSMBS1B32X	CSMBS1C32X	CSMBS1D32X
40	CSMBS1B40X	CSMBS1C40X	CSMBS1D40X
50	CSMBS1B50X	CSMBS1C50X	CSMBS1D50X
63	CSMBS1B63X	CSMBS1C63X	CSMBS1D63X
2 Pole			
0.5	-	CSMBS2C0.5X	CSMBS2D0.5X
01	-	CSMBS2C1X	CSMBS2D1X
02	-	CSMBS2C2X	CSMBS2D2X
03	-	CSMBS2C3X	CSMBS2D3X
04	-	CSMBS2C4X	CSMBS2D4X
05	-	CSMBS2C5X	CSMBS2D5X
06	CSMBS2B6X	CSMBS2C6X	CSMBS2D6X
10	CSMBS2B10X	CSMBS2C10X	CSMBS2D10X
16	CSMBS2B16X	CSMBS2C16X	CSMBS2D16X
20	CSMBS2B20X	CSMBS2C20X	CSMBS2D20X
25	CSMBS2B25X	CSMBS2C25X	CSMBS2D25X
32	CSMBS2B32X	CSMBS2C32X	CSMBS2D32X
40	CSMBS2B40X	CSMBS2C40X	CSMBS2D40X
50	CSMBS2B50X	CSMBS2C50X	CSMBS2D50X
63	CSMBS2B63X	CSMBS2C63X	CSMBS2D63X
3 Pole			
0.5	-	CSMBS3C0.5	CSMBS3D0.5X
01	-	CSMBS3C1	CSMBS3D1X
02	-	CSMBS3C2	CSMBS3D2X
03	-	CSMBS3C3	CSMBS3D3X
04	-	CSMBS3C4	CSMBS3D4X
05	-	CSMBS3C5	CSMBS3D5X
06	CSMBS3B6	CSMBS3C6	CSMBS3D6X
10	CSMBS3B10	CSMBS3C10	CSMBS3D10X
16	CSMBS3B16	CSMBS3C16	CSMBS3D16X
20	CSMBS3B20	CSMBS3C20	CSMBS3D20X
25	CSMBS3B25	CSMBS3C25	CSMBS3D25X
32	CSMBS3B32	CSMBS3C32	CSMBS3D32X
40	CSMBS3B40	CSMBS3C40	CSMBS3D40X
50	CSMBS3B50	CSMBS3C50	CSMBS3D50X
63	CSMBS3B63	CSMBS3C63	CSMBS3D63X



Rating (A)	'B' Curve	'C' Curve	'D' Curve
	Reference	Reference	Reference
4 Pole			
0.5	-	CSMBS4C0.5X	CSMBS4D0.5X
01	-	CSMBS4C1X	CSMBS4D1X
02	-	CSMBS4C2X	CSMBS4D2X
03	-	CSMBS4C3X	CSMBS4D3X
04	-	CSMBS4C4X	CSMBS4D4X
05	-	CSMBS4C5X	CSMBS4D5X
06	CSMBS4B6X	CSMBS4C6X	CSMBS4D6X
10	CSMBS4B10X	CSMBS4C10X	CSMBS4D10X
16	CSMBS4B16X	CSMBS4C16X	CSMBS4D16X
20	CSMBS4B20X	CSMBS4C20X	CSMBS4D20X
25	CSMBS4B25X	CSMBS4C25X	CSMBS4D25X
32	CSMBS4B32X	CSMBS4C32X	CSMBS4D32X
40	CSMBS4B40X	CSMBS4C40X	CSMBS4D40X
50	CSMBS4B50X	CSMBS4C50X	CSMBS4D50X
63	CSMBS4B63X	CSMBS4C63X	CSMBS4D63X
1Pole + Neutral			
0.5	-	CSMBS1C0.5NX	CSMBS1D0.5NX
01	-	CSMBS1C1NX	CSMBS1D1NX
02	-	CSMBS1C2NX	CSMBS1D2NX
03	-	CSMBS1C3NX	CSMBS1D3NX
04	-	CSMBS1C4NX	CSMBS1D4NX
05	-	CSMBS1C5NX	CSMBS1D5NX
06	CSMBS1B6NX	CSMBS1C6NX	CSMBS1D6NX
10	CSMBS1B10NX	CSMBS1C10NX	CSMBS1D10NX
16	CSMBS1B16NX	CSMBS1C16NX	CSMBS1D16NX
20	CSMBS1B20NX	CSMBS1C20NX	CSMBS1D20NX
25	CSMBS1B25NX	CSMBS1C25NX	CSMBS1D25NX
32	CSMBS1B32NX	CSMBS1C32NX	CSMBS1D32NX
40	CSMBS1B40NX	CSMBS1C40NX	CSMBS1D40NX
50	CSMBS1B50NX	CSMBS1C50NX	CSMBS1D50NX
63	CSMBS1B63NX	CSMBS1C63NX	CSMBS1D63NX
3 Pole + Neutral			
0.5	-	CSMBS3C0.5NX	CSMBS3D0.5NX
01	-	CSMBS3C1NX	CSMBS3D1NX
02	-	CSMBS3C2NX	CSMBS3D2NX
03	-	CSMBS3C3NX	CSMBS3D3NX
04	-	CSMBS3C4NX	CSMBS3D4NX
05	-	CSMBS3C5NX	CSMBS3D5NX
06	CSMBS3B6NX	CSMBS3C6NX	CSMBS3D6NX
10	CSMBS3B10NX	CSMBS3C10NX	CSMBS3D10NX
16	CSMBS3B16NX	CSMBS3C16NX	CSMBS3D16NX
20	CSMBS3B20NX	CSMBS3C20NX	CSMBS3D20NX
25	CSMBS3B25NX	CSMBS3C25NX	CSMBS3D25NX
32	CSMBS3B32NX	CSMBS3C32NX	CSMBS3D32NX
40	CSMBS3B40NX	CSMBS3C40NX	CSMBS3D40NX
50	CSMBS3B50NX	CSMBS3C50NX	CSMBS3D50NX
63	CSMBS3B63NX	CSMBS3C63NX	CSMBS3D63NX

Product Reference & Dimensions




Isolator

Rating (A)	1 Pole	2 Pole	3 Pole	4 Pole
	Reference	Reference	Reference	Reference
25	CSMBS1ISO25	CSMBS2ISO25	CSMBS3ISO25	CSMBS4ISO25
32	CSMBS1ISO32	CSMBS2ISO32	CSMBS3ISO32	CSMBS4ISO32
40	CSMBS1ISO40	CSMBS2ISO40	CSMBS3ISO40	CSMBS4ISO40
63	CSMBS1ISO63	CSMBS2ISO63	CSMBS3ISO63	CSMBS4ISO63
80	CSMBS1ISO80	CSMBS2ISO80	CSMBS3ISO80	CSMBS4ISO80
100	CSMBS1ISO100	CSMBS2ISO100	CSMBS3ISO100	CSMBS4ISO100


Miniature Circuit Breaker - DC

Rating (A)	1 Pole	2 Pole
	Reference	Reference
0.5	CSMBS1DC0.5	CSMBS2DC0.5
01	CSMBS1DC1	CSMBS2DC1
02	CSMBS1DC2	CSMBS2DC2
03	CSMBS1DC3	CSMBS2DC3
04	CSMBS1DC4	CSMBS2DC4
05	CSMBS1DC5	CSMBS2DC5
06	CSMBS1DC6	CSMBS2DC6
10	CSMBS1DC10	CSMBS2DC10
16	CSMBS1DC16	CSMBS2DC16
20	CSMBS1DC20	CSMBS2DC20
25	CSMBS1DC25	CSMBS2DC25
32	CSMBS1DC32	CSMBS2DC32
40	CSMBS1DC40	CSMBS2DC40
50	CSMBS1DC50	CSMBS2DC50
63	CSMBS1DC63	CSMBS2DC63

Installation Dimensions

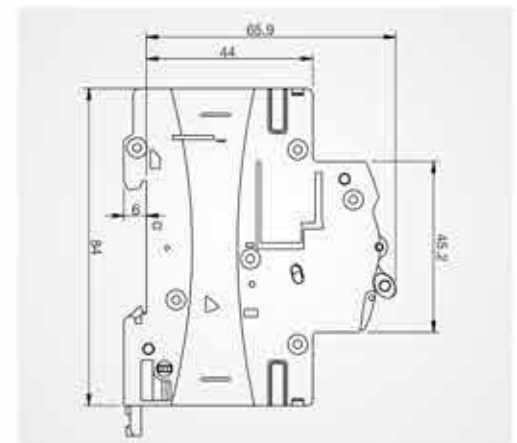

TERMINAL SIDE

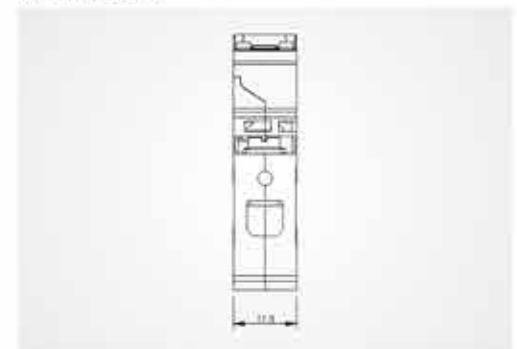

Highlights



A state-of-the-art product fit for Industrial, Residential and Commercial applications.

It is one piece residual current circuit breaker which is used both for control and isolation of electrical circuits. It provides total protection to all living beings against direct and indirect contact as well as to installations, big or small, against insulation faults. **Human life is valueless and Wintrip RCCB is the solution provider for safeguarding it.**

Majority of mishaps occur due to current leakage consequently leading to fire. Wintrip RCCB of the required rating instantly detects this leakage and terminates the supply reducing the risk of any kind of fire. The range is available in AC Residual Tripping Characteristics in 2 & 4 Pole configurations in 16, 20, 25, 32, 40, 63, 80 & 100Amps in 30, 100 & 300mA sensitivity.

- Provides protection against earth fault/leakage current and also fulfill the function of isolation.
- Automatically measures and disconnect the circuit when earth fault/leakage current occurs and exceeds the rated sensitivity.
- High short-circuit current withstand capacity - 6kA
- Dual termination possible for cable and comb type busbar connection
- Equipped with finger protected connection terminals (Ip20)
- Fire resistant plastic parts to withstand abnormal heating and strong impact
- Independent of power supply and line voltage. Also free from external voltage fluctuation.
- Incorporates a filtering device for prevention of nuisance tripping due to transient voltage
- Easy padlocking facility.



Technical Data - Characteristics

Standards			IS 12640-1:2008
Residual tripping characteristics			AC
Tripping time at $I_{\Delta n}$	Instantaneous	ms	<40
	Selective	ms	>150
Rated current		A	16, 20, 25, 32, 40, 63, 80 & 100
Rated residual current $I_{\Delta n}$		mA	30, 100, 300
Calibration temperature		°C	30
Number of poles versus modules			1
Rated voltage U_n	2P AC	V	240
	4P AC	V	415
Frequency		Hz	50/60
Maximum service voltage U_{bmax}		V	2P=265 / 4P=455
Minimum service voltage U_{bmin}		V	2P=100 / 4P=190
Power supply			Top / Bottom
Rated making and breaking capacity (I_m)		A	500 (or 10xIn)
Residual making and breaking capacity ($I_{\Delta m}$)		A	500 (or 10xIn)
Conditional short-circuit capacity (I_{nc})		A	6000 Fuse 100A gLgG
Conditional residual short-circuit capacity ($I_{\Delta c}$)		A	6000 Fuse 100A gLgG
Grid distance (safety distance between two devices)		mm	35
Isolator application			yes
Insulation degree	Insulation voltage	V (DC)	660
	Shock voltage (1.2/50µs)	kV	6
	Insulation resistance	MΩ	1000
	Dielectric strength	V	2500
Shock resistance (in x, y, z direction) (EN / IEC 60077/16.3)		40g	18 shocks 5 ms
Vibration resistance (in x, y, z direction; EN / IEC 60068-2-6)		1.5g	30 min, 0-80Hz
Endurance	electrical at U_n , I_n		10000
	mechanical at U_n , I_n		20000
Protection degree (outside/inside electrical enclosure) with door			IP20 / IP40
Self extinguish degree (according to UI94)			V2
Tropicalisation (acc. to EN/IEC 60068-2, DIN 40046)		°C/RH	+55 / 95%
Pollution degree (acc. EN/IEC 60947-1)			3
Operating temperature			AC (-5 – +60)
Storage temperature		°C	-25 – +70
Terminals capacity	Rigid cable min/max (top)	mm ²	1.5/25
	Flexible cable min*/max (top)	mm ²	1.5/25
	Rigid cable min/max (bottom)	mm ²	1.5/25
	Flexible cable min*/max (bottom)	mm ²	1.5/25
	(*Flexible cable 0.75/1/1.5 mm ² with cable lug)		
Busbars systems	Pin		yes
	Fork		yes
CE marking			yes
Torque	Top / Bottom	Nm	5/5

Features - Performance



Test Button



Rated current I_n / $I_{\Delta n}$



DIN Rail Mounting

Type AC



Rated Current setting I_n	A	16, 20, 25, 32, 40, 63, 80, 100
Residual current $I_{\Delta n}$	mA	30, 100, 300
Rated voltage AC U_n	V	2P: 240; 4P: 415
Minimum operating voltage U_{min}	V	2P: 100; 4P: 190
Mechanical/electrical endurance		20000 / 10000
Tropicalisation acc.to EN/IEC 60068-2-28/2-30 and DIN 40046		95% RH at 55 °C
Terminal capacity exible/rigid cable	mm ²	25/25
Poles		2, 4
Nuisance tripping resistance		250A 8/20us; 200A 0.5us - 100kHz
Ambient temperature	°C	-5 upto 40
Weight	g	2P- 224.5; 4P-409

Short-circuit Capacity


Acc. to EN/IEC 61008-1	$I_m = 500A$
Making and breaking capacity	$ID_m > 500A$ from 16 upto 40A $ID_m = 10I_n$ from 63 upto 100A
Short-circuit capacity	$I_{nc} = 6000A$ at 240/415V Fuse 80A gG

Normal operation and mounting requirement

1. Ambient temperature -5°C ~ +40°C •Altitude above sea level less than 2000 m.
2. Humidity not exceeding 50% at 40°C and not exceeding 90% at 25°C.
3. Installation class II or III.
4. Pollution degree 3.
5. All equipments used should be properly earthed.
6. For right operation should ensure that the neutral conductor on the load side of the RCCB must not be linked to earth. Otherwise tripping may be impaired or nuisance tripping may occur.
7. Installation method DIN Rail mounting type.
8. Product should be installed vertically at the place where there shall be no severe impact and vibration.
9. The product is switched on when the handle is at upper position.

RCCB Tripping Cause Detection & Remedy

1. Switch OFF all the MCBs connected to the circuit downstream the RCCB.
2. Switch ON the RCCB and switch ON the MCBs one by one.
3. During switching ON of a particular circuit RCCB keeps tripping frequently.
4. In this circuit the fault persists.
5. Isolate the faulty circuit, correct the fault. Now the RCCB will not trip.

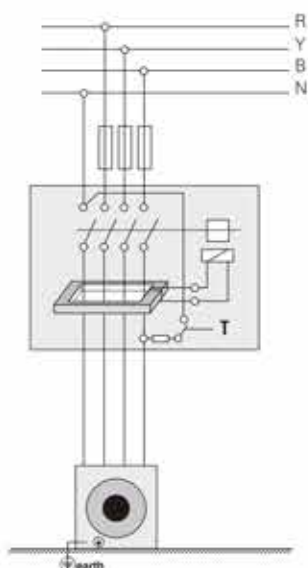

Working Principle


The RCCB works on the current balance principle. The supply conductors are passed through a toroid and form the primary windings of a current transformer. Its secondary winding is connected to a highly sensitive electromagnetic trip relay, which operates the trip mechanism.

In a healthy circuit, sum of the current in phases, is equal to the current in the neutral and the vector sum of all current is equal to zero. If there is any insulation fault in the current and leakage current flows to earth, the current do not balance and their vector sum is not equal to zero. This imbalance is detected by the core balanced current transformer, the RCCB is tripped and supply to load is interrupted.



Sensitivity Selection Criteria

Sensitivity	Application
30mA	Designed for additional protection against direct contact. The 30 mA RCCB protects against leakage currents and indirect contact with earth loop impedance up to 1667 Ohms.
100mA	Is suitable for protection against indirect contact and leakage current for larger installations. The 100 mA RCCB's operate within 30 ms, but do not provide the same level of personal protection as the 30 mA units. The 100 mA RCCB protects against leakage currents and indirect contact with earth loop impedance up to 500 ohms.
300mA	A less sensitive protection device suitable for large installations having high levels of leakage current. 300 mA RCCB's protect against leakage current and indirect contact up to 167 ohms earth loop impedance.

Current Limiting Curve

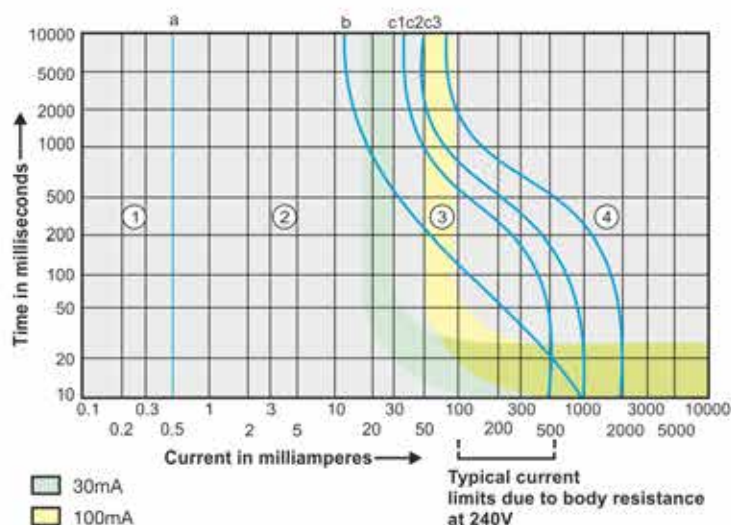


Product Reference - RCCB

Description	Wiring Diagram	Rated Current	Reference	Sensitivity
Double Pole		16	CSRB2P16A30 CSRB2P16A100 CSRB2P16A300	30 100 300
		20	CSRB2P20A30 CSRB2P20A100 CSRB2P20A300	30 100 300
		25	CSRB2P25A30 CSRB2P25A100 CSRB2P25A300	30 100 300
		32	CSRB2P32A30 CSRB2P32A100 CSRB2P32A300	30 100 300
		40	CSRB2P40A30 CSRB2P40A100 CSRB2P40A300	30 100 300
		63	CSRB2P63A30 CSRB2P63A100 CSRB2P63A300	30 100 300
		80	CSRB2P80A30 CSRB2P80A100 CSRB2P80A300	30 100 300
		100	CSRB2P100A30 CSRB2P100A100 CSRB2P100A300	30 100 300
Four Pole		16	CSRB4P16A30 CSRB4P16A100 CSRB4P16A300	30 100 300
		20	CSRB4P20A30 CSRB4P20A100 CSRB4P20A300	30 100 300
		25	CSRB4P25A30 CSRB4P25A100 CSRB4P25A300	30 100 300
		32	CSRB4P32A30 CSRB4P32A100 CSRB4P32A300	30 100 300
		40	CSRB4P40A30 CSRB4P40A100 CSRB4P40A300	30 100 300
		63	CSRB4P63A30 CSRB4P63A100 CSRB4P63A300	30 100 300
		80	CSRB4P80A30 CSRB4P80A100 CSRB4P80A300	30 100 300
		100	CSRB4P100A30 CSRB4P100A100 CSRB4P100A300	30 100 300

Dimensions


Double Pole

CSRB2P16A30	CSRB2P40A30
CSRB2P16A100	CSRB2P40A100
CSRB2P16A300	CSRB2P40A300
CSRB2P20A30	CSRB2P63A30
CSRB2P20A100	CSRB2P63A100
CSRB2P20A300	CSRB2P63A300
CSRB2P25A30	CSRB2P80A30
CSRB2P25A100	CSRB2P80A100
CSRB2P25A300	CSRB2P80A300
CSRB2P32A30	CSRB2P100A30
CSRB2P32A100	CSRB2P100A100
CSRB2P32A300	CSRB2P100A300

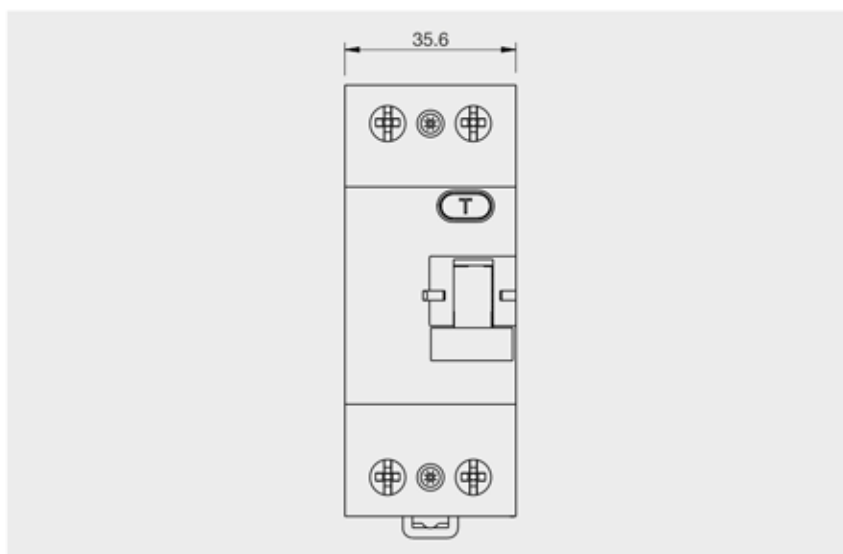


Four Pole

CSRB4P16A30	CSRB4P40A30
CSRB4P16A100	CSRB4P40A100
CSRB4P16A300	CSRB4P40A300
CSRB4P20A30	CSRB4P63A30
CSRB4P20A100	CSRB4P63A100
CSRB4P20A300	CSRB4P63A300
CSRB4P25A30	CSRB4P80A30
CSRB4P25A100	CSRB4P80A100
CSRB4P25A300	CSRB4P80A300
CSRB4P32A30	CSRB4P100A30
CSRB4P32A100	CSRB4P100A100
CSRB4P32A300	CSRB4P100A300

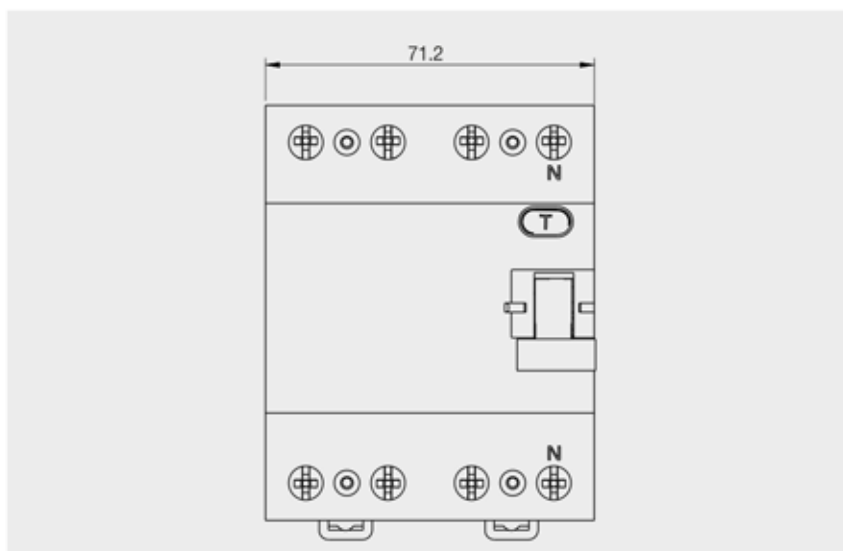

Side view - Double & Four Pole

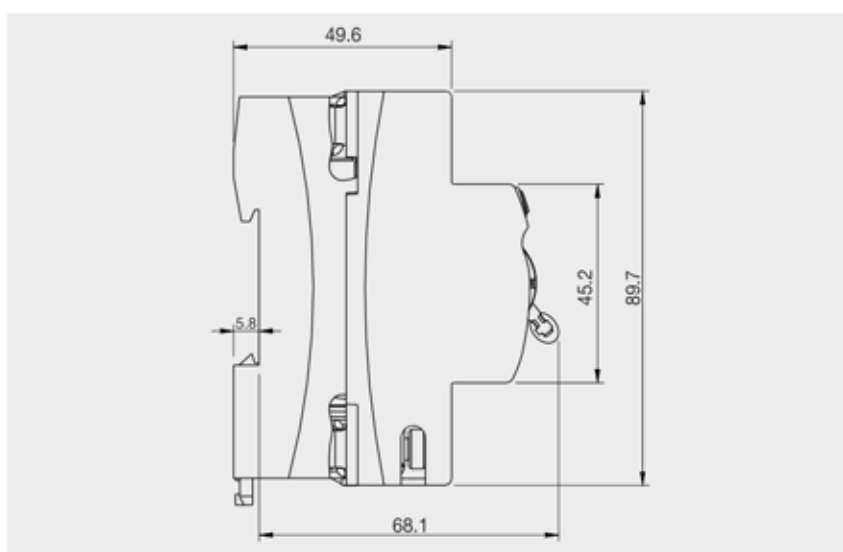

All dimensions are in mm

Introduction - Distribution Board



WiNtrip

Distribution Board

The Board design is specially engineered for meeting the requirements of all the segments namely industrial, commercial and residential.

For effective and safe power distribution/sub distribution, insulated neutral links, insulated copper bus bar, earth bar and inter connecting links with lugs are part of the unit. These Boards are equipped with top and bottom removable gland plates with adequate number of knock outs, which enable easy installation and connection of conduits of all sizes. Double door construction of Distribution Boards enables easy removal and reversal of the door by just unhinging two springs. These boards are a comprehensive system in itself.


The Boards are backed by the technological expertise of C&S which excels globally in all low voltage products. The boards are of universal type, which means they can be both flush or wall mounted based on the requirement. These Distribution Boards undergo a seven tank phosphating process to ensure an anti rust conditioning, superior finish and long lasting strength. 60 micron premium quality powder coating is applied for extra smooth finish.

In addition to complying with all necessary minute technical parameters, C&S WiNtrip Distribution Boards are highly user friendly and aesthetically par excellence. Double Door DBs meet all the requirements of IP 42/43.



Features

- Choice of multiple in-comer in form of Isolator, MCB, RCCB + MCB, Isolator + MCB
- Fully equipped DBs supplied with Busbar, Earth Links, Neutral Links and inter connecting links.
- Insulated/Captive Busbar and Neutral Links, for better safety and protection.
- In all modules of SPN heavy duty gasket has been inserted for weather proofing.

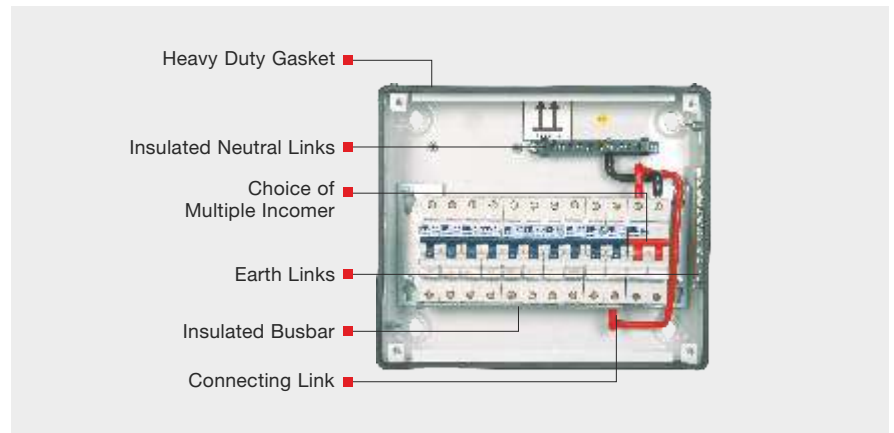


- While handling the DB in the event of any fault, insulated busbar and neutral links will provide protection to the Electrician.



- Unique feature of PAN Assembly. This is an added advantage during maintenance.
- All the MCBs mounted inside the DB can be taken out in just one shot by the easy removal of the four screws.
- Adequate wiring space has been provided below the Pan Assembly for proper termination and safety.




- Steel nut inserts with deep screw to give a firm hold and grip to the door.
- Earthing provision, basically required for the protection against stray charges producing leakage current. An additional safety factor.
- In fully loaded Pre-wired DBs wiring with thimble pin for better safety and aesthetics.

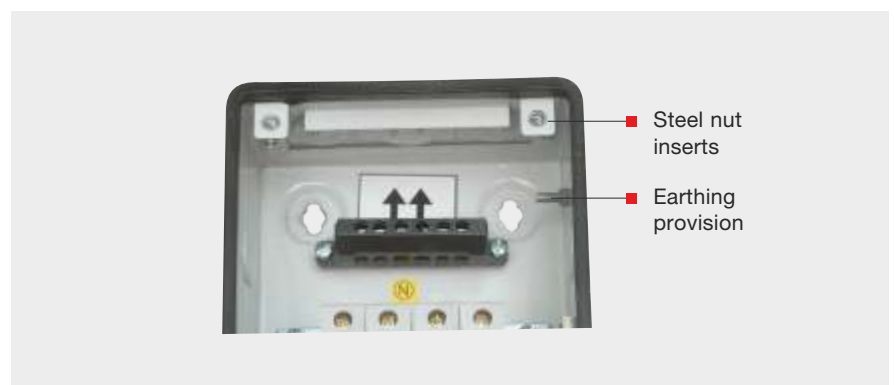

- For enhancing the conduit flexibility detachable gland plates at top and bottom with knock outs on the two sides.




- All doors and frames are deep drawn for better aesthetics and long life with no welding joints.
- Two finger holes to lift the plate have been duly plugged for making the board dust free and safe

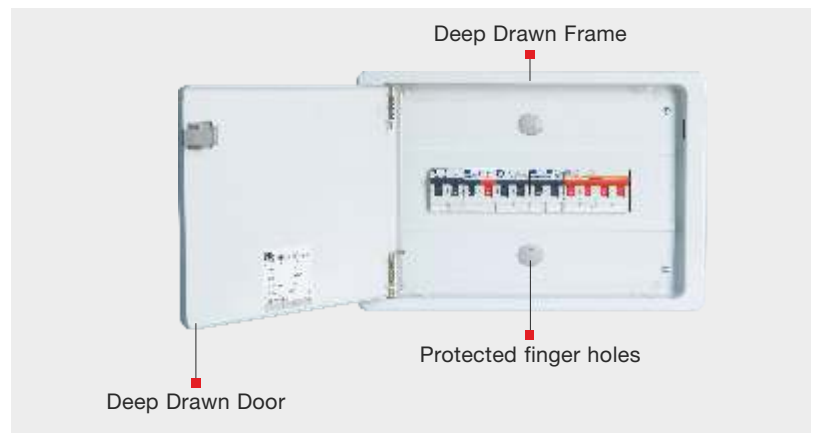

- Double Door DB Door with hinge mechanism. It is highly user friendly as in case of larger DBs door can be removed temporarily and fault can be cleared with ease.
- Secondly, the door can be opened in any direction suitable as per the location, what need to be done is to just unhinge the door from left side and hinge safely to the right side.



- Lock and Key mechanism is there on the front door for better aesthetic value along-with additional safety.
- Smooth finish with 60 micron powder coating
- IP42 Protection with provision for IP43
- Extra protection to the DB during masson job through masking sheet

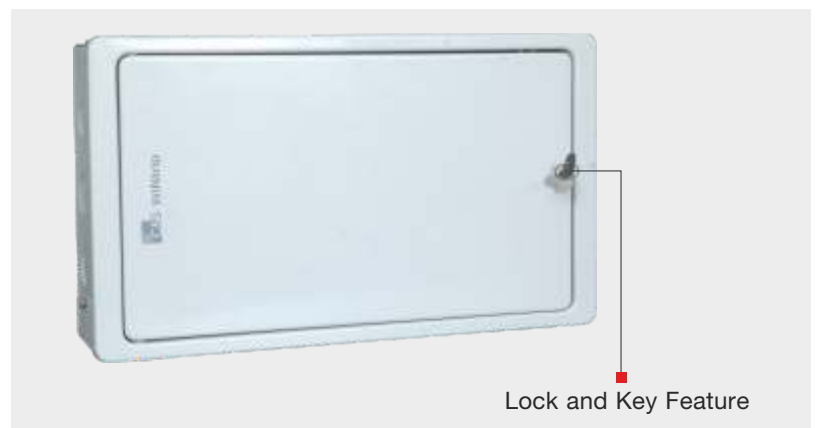



Vertical TPN Distribution Board

VTPN Double Door Distribution Board with MCB as incomer in closed position



Assembled 4 way VTPN Distribution Board with MCB as incomer in open door position



Internal View of VTPN Double Door Distribution Board with MCB as incomer



Plug & Socket DB



Outer version of 30A TP Plug & Socket Distribution Board



Inner version of 30A TP Plug & Socket Distribution Board



Outer version of 20A SPN Plug & Socket Distribution Board



Inner version of 20A SPN Plug & Socket Distribution Board

- Deep drawn sheet metal powder coated Plug & Socket Distribution Boards
- Range available in 10 & 20A SPN and 20 & 30A TP
- Adjustable 35 sq. mm din rail with connecting links
- Insulated neutral link in SPN Boards
- SPN Plug & Socket in 250V and TP in 440V
- SPN & TP boards with one blanking plate each & sockets with plastic cover
- Connecting links cross width section SPN - 2.5 sq. mm flexible cable, TP - 6.0 sq. mm flexible cable
- Provision for both flush & wall mounting
- Heavy duty screw type out going wire nozzle
- Body in matt finish and cover in semi glossy finish
- Paint 60 micron powder coating
- Plug & Socket internal material SPN PBT & TP PBT & Porcelain
- Plug & Socket also available loose

Distribution Board


SPN Single Door Distribution Board with IP20 protection



SPN - Single Door

Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Single Door	CSDBSPNSD04	4	4
8 way Single Door	CSDBSPNSD08	8	8
12 way Single Door	CSDBSPNSD12	12	12
16 way Single Door	CSDBSPNSD16	16	16

Dimensions

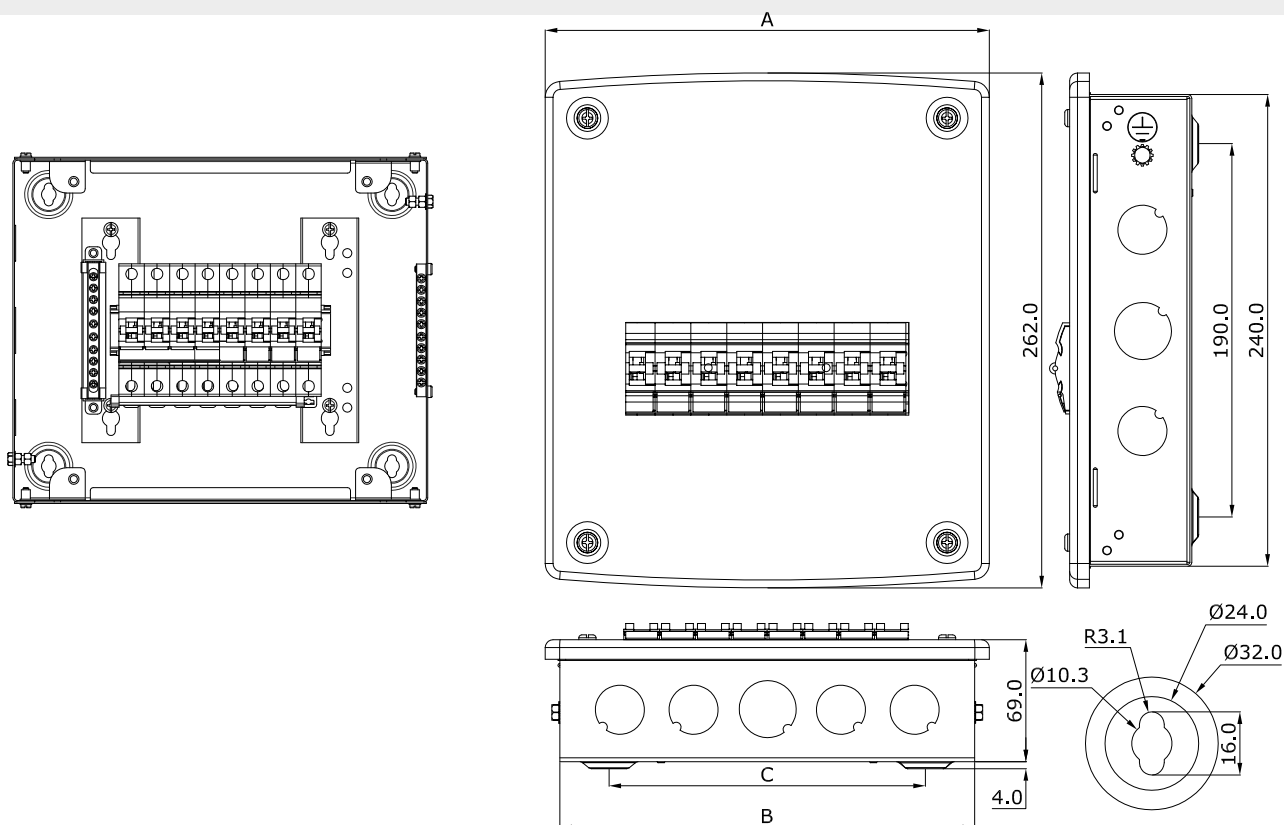

Product Code	No. of Ways	A	B	C	TOP		BOTTOM		SIDES	
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBSPNSD04	4	154.0	139.0	89.0	1	2	1	2	1	2
CSDBSPNSD08	8	226.0	211.0	161.0	1	4	1	4	1	2
CSDBSPNSD12	12	298.0	283.0	233.0	1	6	1	6	1	2
CSDBSPNSD16	16	370.0	355.0	305.0	1	8	1	8	1	2

All dimensions are in mm


SPN Double Door Distribution Board with IP42 protection



SPN - Double Door

Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Double Door	CSDBSPNDD04	4	4
8way Double Door	CSDBSPNDD08	8	8
12 way Double Door	CSDBSPNDD12	12	12
16 way Double Door	CSDBSPNDD16	16	16

Dimensions

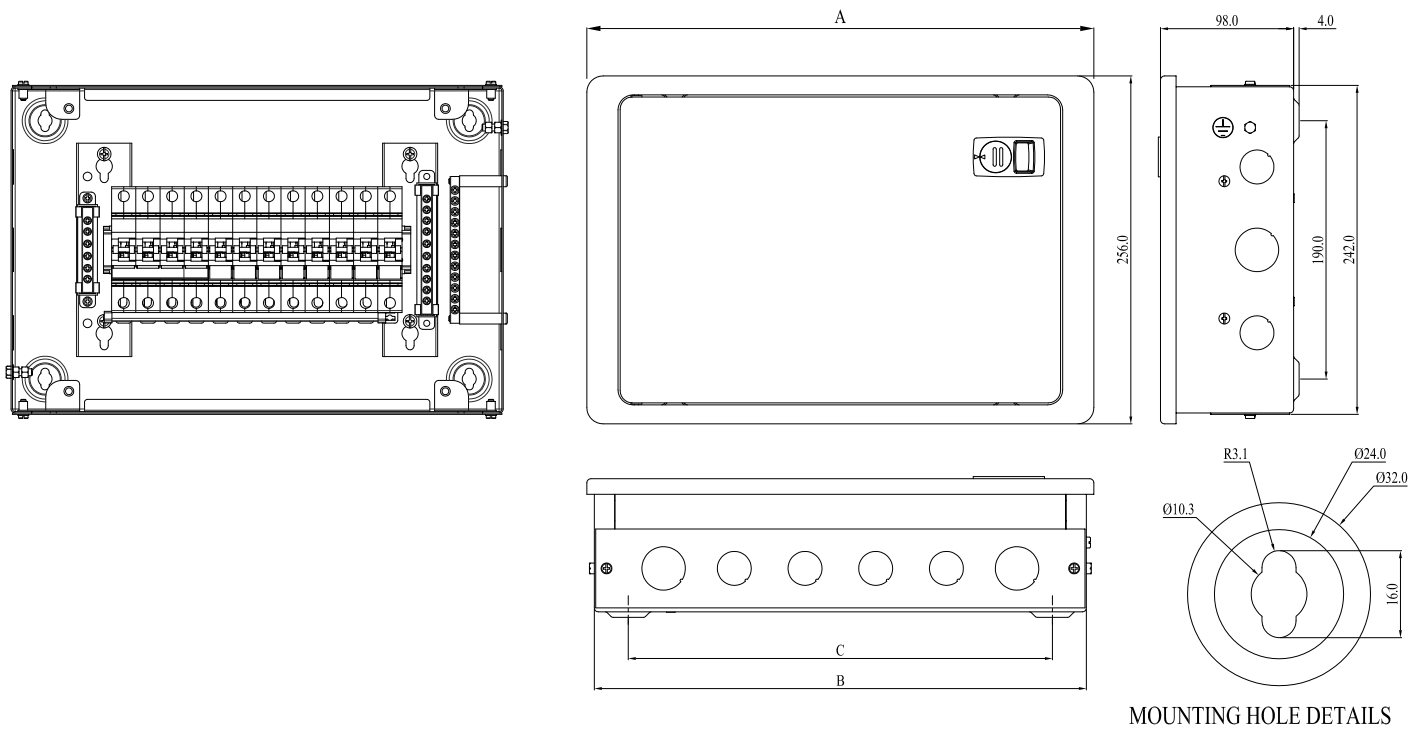

Product Code	No. of Ways	A	B	C	TOP		BOTTOM		SIDES	
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBSPNDD04	4	229.0	218.0	168.0	1	2	1	2	1	2
CSDBSPNDD08	8	301.0	290.0	240.0	2	2	2	2	1	2
CSDBSPNDD12	12	373.0	362.0	312.0	2	4	2	4	1	2
CSDBSPNDD16	16	445.0	434.0	384.0	2	6	2	6	1	2

All dimensions are in mm

Distribution Board



TPN Single Door Distribution Board with IP20 protection



TPN - Horizontal Single Door

Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Single Door	CSDBTPNHSD04	8+12	20
6 way Single Door	CSDBTPNHSD06	8+18	26
8 way Single Door	CSDBTPNHSD08	8+24	32
12 way Single Door	CSDBTPNHSD12	8+36	44
16 way Single Door	CSDBTPNHSD16	8+48	56

Dimensions

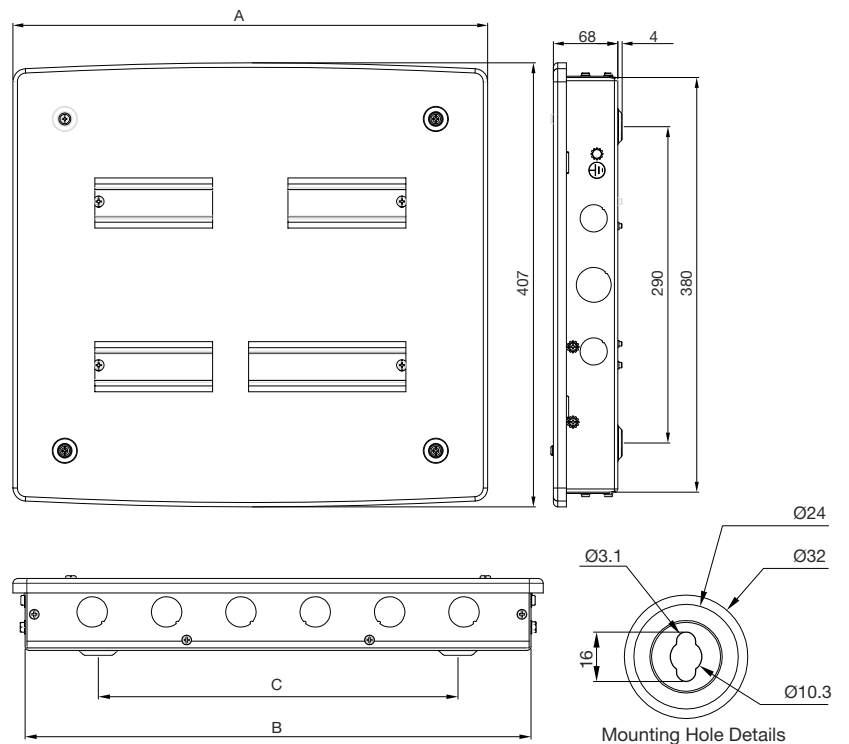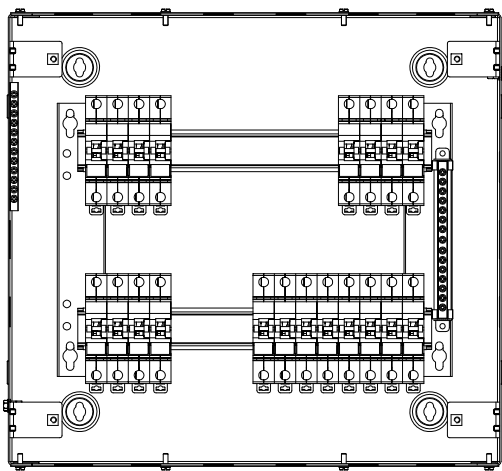

Product Code	No. of Ways	A	B	C	TOP / BOTTOM	EACH SIDES	
					Ø25 Knockout	Ø25 Knockout	Ø32 Knockout
CSDBTPNHSD04	4	435.0	415.0	295.0	4	2	1
CSDBTPNHSD06	6	435.0	415.0	295.0	6	2	1
CSDBTPNHSD08	8	470.0	450.0	330.0	7	2	1
CSDBTPNHSD12	12	615.0	595.0	380.0	9	2	1
CSDBTPNHSD16	16	760.0	740.0	430.0	11	2	1

All dimensions are in mm



TPN Double Door Distribution Board with IP42 protection



TPN - Horizontal Double Door

Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Double Door	CSDBTPNHDD04	8+12	20
6 way Double Door	CSDBTPNHDD06	8+18	26
8 way Double Door	CSDBTPNHDD08	8+24	32
12 way Double Door	CSDBTPNHDD12	8+36	44
16 way Double Door	CSDBTPNHDD16	8+48	56

Dimensions

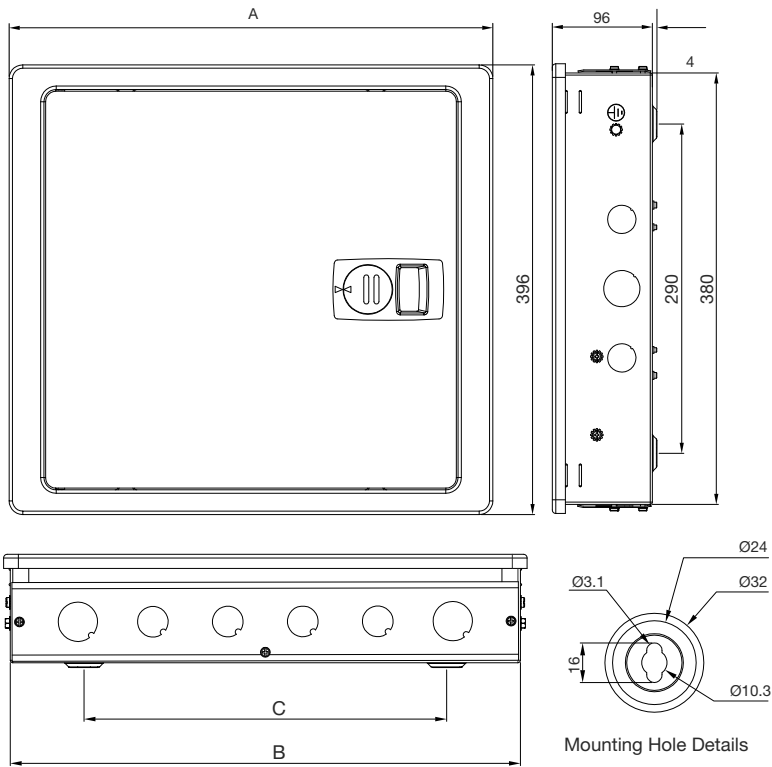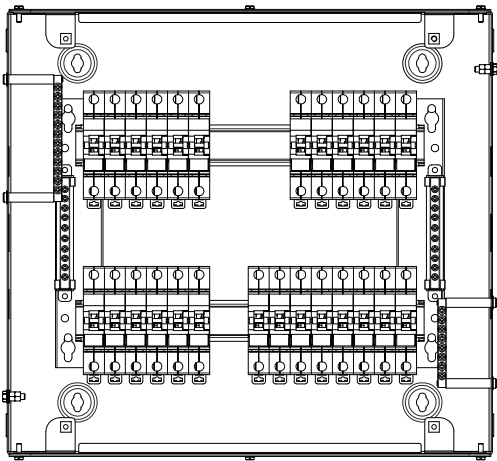

Product Code	No. of Ways	A	B	C	TOP / BOTTOM		EACH SIDES	
					Ø25 Knockout	Ø32 Knockout	Ø25 Knockout	Ø32 Knockout
CSDBTPNHDD04	4	426.0	415.0	295.0	2	2	2	1
CSDBTPNHDD06	6	426.0	415.0	295.0	4	2	2	1
CSDBTPNHDD08	8	461.0	450.0	330.0	5	2	2	1
CSDBTPNHDD12	12	606.0	595.0	380.0	7	2	2	1
CSDBTPNHDD16	16	751.0	740.0	430.0	9	2	2	1

All dimensions are in mm

Distribution Board



WiNclass SPN Single Door Distribution Board with IP20 protection

WiNclass SPN - Single Door



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Single Door	CSDBSPNSD04S	4	4
8 way Single Door	CSDBSPNSD08S	8	8
12 way Single Door	CSDBSPNSD12S	12	12
16 way Single Door	CSDBSPNSD16S	16	16
2+4 way Single Door	CSDBSPNSD2+04	2+4	6
2+6 way Single Door	CSDBSPNSD2+06	2+6	8
2+8 way Single Door	CSDBSPNSD2+08	2+8	10
2+10 way Single Door	CSDBSPNSD2+10	2+10	12
2+12 way Single Door	CSDBSPNSD2+12	2+12	14
2+14 way Single Door	CSDBSPNSD2+14	2+14	16

Dimensions

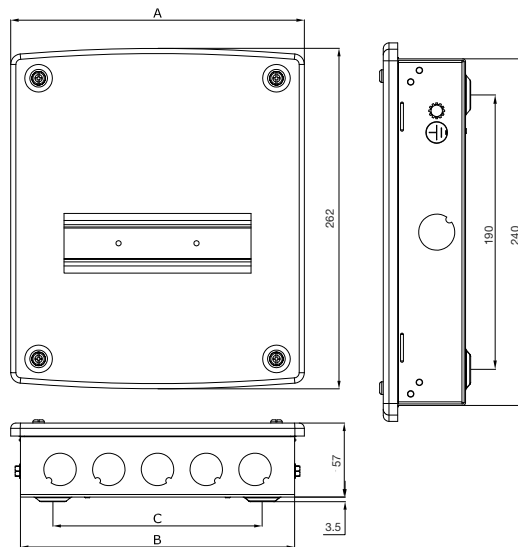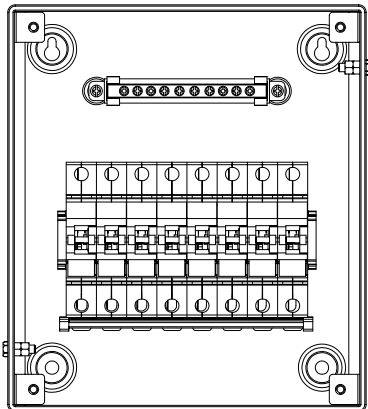

Product Code	No. of Ways	A	B	C	TOP / BOTTOM	EACH SIDES
					Ø25 Knockout	Ø25 Knockout
CSDBSPNSD04S	4	154.0	139.0	89.0	3	1
CSDBSPNSD08S	8	226.0	211.0	161.0	5	1
CSDBSPNSD12S	12	298.0	283.0	233.0	7	1
CSDBSPNSD16S	16	370.0	355.0	305.0	8	1
CSDBSPNSD2+04	2+04	154.0	139.0	89.0	3	1
CSDBSPNSD2+06	2+06	226.0	211.0	161.0	5	1
CSDBSPNSD2+08	2+08	226.0	211.0	161.0	5	1
CSDBSPNSD2+10	2+10	298.0	283.0	233.0	7	1
CSDBSPNSD2+12	2+12	298.0	283.0	233.0	7	1
CSDBSPNSD2+14	2+14	370.0	355.0	305.0	8	1

All dimensions are in mm



WiNclass SPN Double Door Distribution Board with IP42 protection

WiNclass SPN - Double Door



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Double Door	CSDBSPNDD04S	4	4
8 way Double Door	CSDBSPNDD08S	8	8
12 way Double Door	CSDBSPNDD12S	12	12
16 way Double Door	CSDBSPNDD16S	16	16
2+4 way Double Door	CSDBSPNDD2+04	2+4	6
2+6 way Double Door	CSDBSPNDD2+06	2+6	8
2+8 way Double Door	CSDBSPNDD2+08	2+8	10
2+10 way Double Door	CSDBSPNDD2+10	2+10	12
2+12 way Double Door	CSDBSPNDD2+12	2+12	14
2+14 way Double Door	CSDBSPNDD2+14	2+14	16

Dimensions

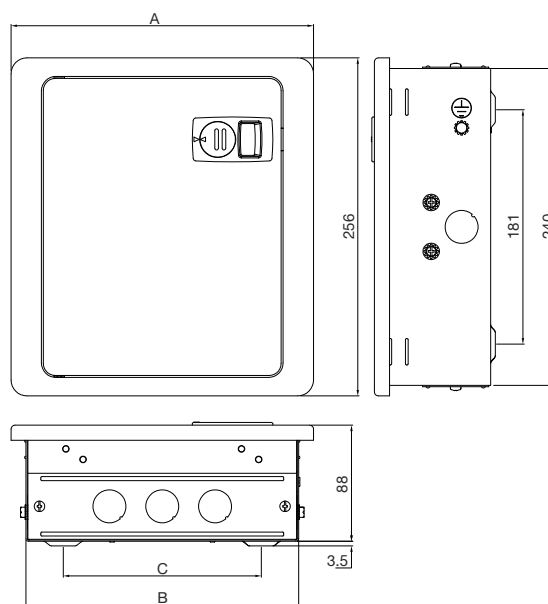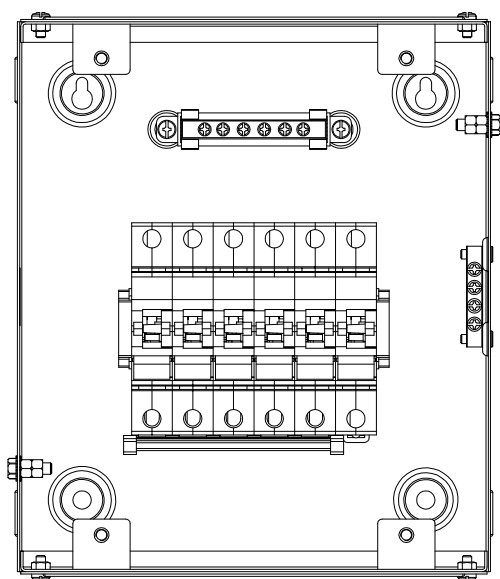

Product Code	No. of Ways	A	B	C	TOP / BOTTOM		EACH SIDES
					Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBSPNDD04S	4	229.0	206.5	150.0	3	-	1
CSDBSPNDD08S	8	301.0	278.5	222.0	2	2	1
CSDBSPNDD12S	12	373.0	350.5	294.0	-	2	1
CSDBSPNDD16S	16	445.0	422.5	366.0	4	2	1
CSDBSPNDD2+04	2+04	229.0	206.5	150.0	3	-	1
CSDBSPNDD2+06	2+06	301.0	278.5	222.0	2	2	1
CSDBSPNDD2+08	2+08	301.0	278.5	222.0	2	2	1
CSDBSPNDD2+10	2+10	373.0	350.5	294.0	4	2	1
CSDBSPNDD2+12	2+12	373.0	350.5	294.0	4	2	1
CSDBSPNDD2+14	2+14	445.0	422.5	366.0	4	2	1

All dimensions are in mm

Distribution Board



WiNclass TPN Single Door Distribution Board with IP20 protection



WiNclass TPN - Horizontal Single Door

Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Single Door	CSDBTPNHSD04S	8+12	20
6 way Single Door	CSDBTPNHSD06S	8+18	26
8 way Single Door	CSDBTPNHSD08S	8+24	32
12 way Single Door	CSDBTPNHSD12S	8+36	44
16 way Single Door	CSDBTPNHSD16S	8+48	56


Dimensions

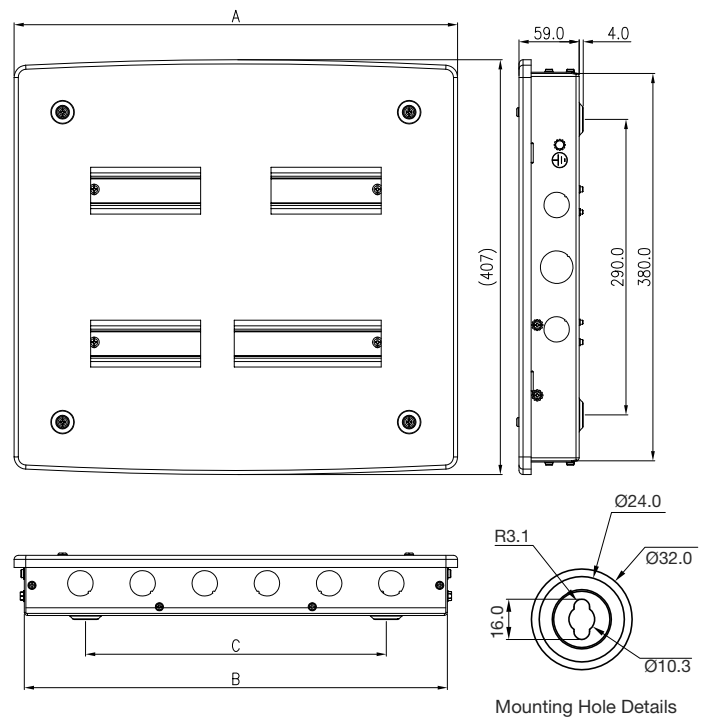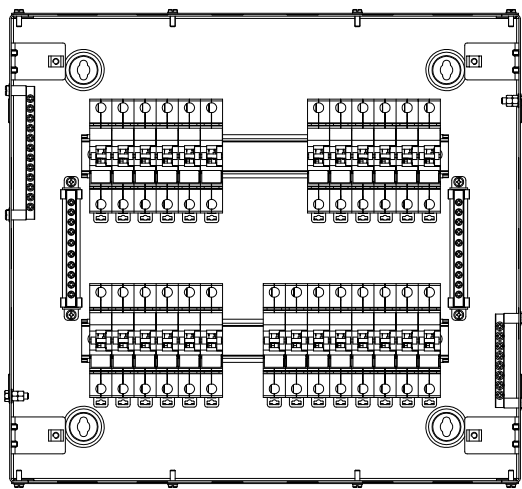

Product Code	No. of Ways	A	B	C	TOP / BOTTOM	EACH SIDES	
					Ø25 Knockout	Ø25 Knockout	Ø32 Knockout
CSDBTPNHSD04S	4	435.0	415.0	295.0	4	2	1
CSDBTPNHSD06S	6	435.0	415.0	295.0	6	2	1
CSDBTPNHSD08S	8	470.0	450.0	330.0	7	2	1
CSDBTPNHSD12S	12	615.0	595.0	380.0	9	2	1
CSDBTPNHSD16S	16	760.0	740.0	430.0	11	2	1

All dimensions are in mm


WiNclass TPN Double Door Distribution Board with IP42 protection

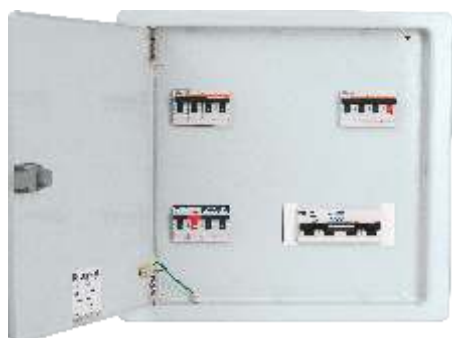

WiNclass TPN - Horizontal Double Door

Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Double Door	CSDBTPNHDD04SN	4+12	16
4 way Double Door	CSDBTPNHDD04S	8+12	20
6 way Double Door	CSDBTPNHDD06S	8+18	26
8 way Double Door	CSDBTPNHDD08S	8+24	32
12 way Double Door	CSDBTPNHDD12S	8+36	44
16 way Double Door	CSDBTPNHDD16S	8+48	56

Dimensions

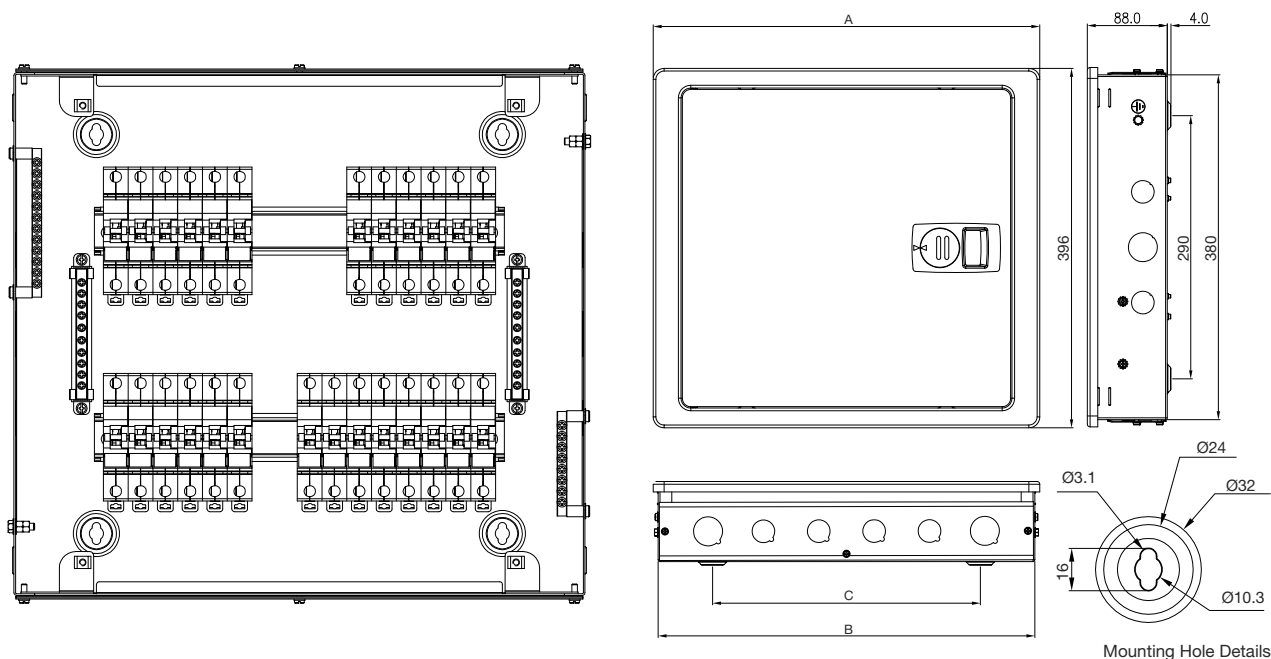

Product Code	No. of Ways	A	B	C	TOP / BOTTOM		EACH SIDES	
					Ø25 Knockout	Ø32 Knockout	Ø25 Knockout	Ø32 Knockout
CSDBTPNHDD04SN	4	317.0	306.0	186.0	4	2	2	1
CSDBTPNHDD04S	4	426.0	415.0	295.0	4	2	2	1
CSDBTPNHDD06S	6	426.0	415.0	295.0	4	2	2	1
CSDBTPNHDD08S	8	461.0	450.0	330.0	5	2	2	1
CSDBTPNHDD12S	12	606.0	595.0	380.0	7	2	2	1
CSDBTPNHDD16S	16	751.0	740.0	430.0	9	2	2	1

All dimensions are in mm

VTPN Vertical with MCB as incomer Double Door with IP42 protection




With provision for MCB as incomer

Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 way Double Door	CSDBTPNVDD04*	8+12	20
8 way Double Door	CSDBTPNVDD08*	8+24	32
12 way Double Door	CSDBTPNVDD12*	8+36	44

*Lock on request

Dimensions

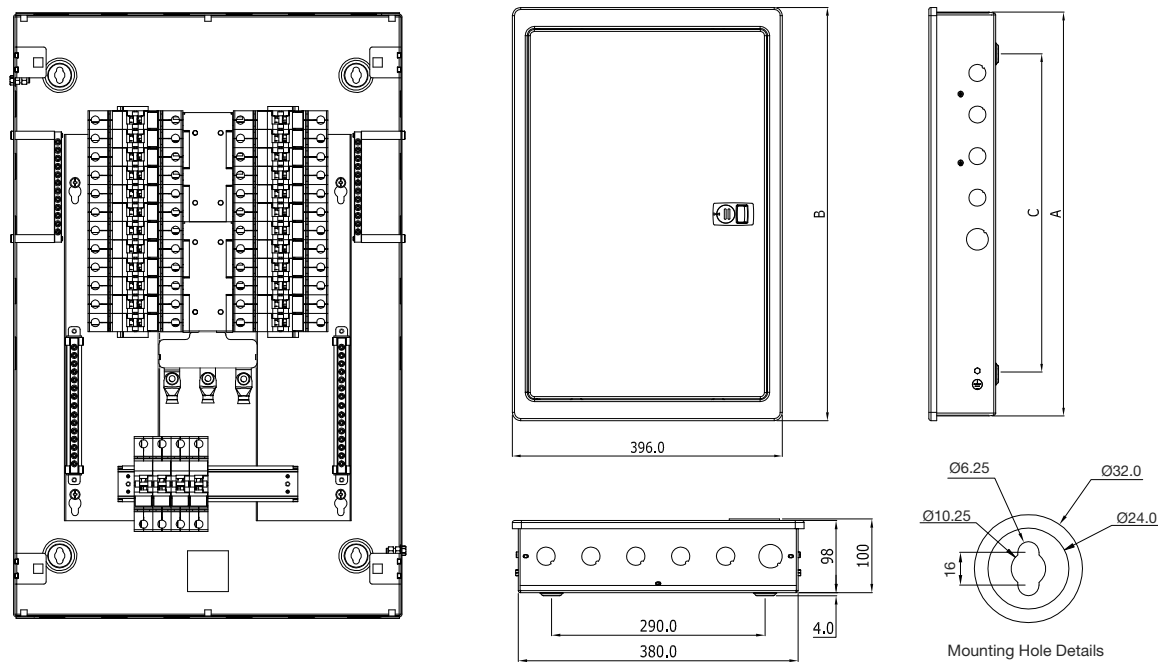

Product Code	No. of Ways	A	B	C	TOP		BOTTOM		SIDES	
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBTPNVDD04	4	445	461	325	1	5	1	5	1	4
CSDBTPNVDD08	8	590	606	470	1	5	1	5	1	4
CSDBTPNVDD12	12	735	751	615	1	5	1	5	1	4

All dimensions are in mm

VTPN MCCB as incomer Double Door Distribution Board with IP43 protection

With provision for MCCB as incomer
(suitable for Winbreak CCS2A, CS3A, CS3B and CS3C three pole and four pole versions)
100A Winbreak CS2A MCCB incomer Distribution Board*



Description	Product Code	No. of Ways
4 Way Double Door	CSDBMCCB100DD04IP43	4
8 Way Double Door	CSDBMCCB100DD08IP43	8
12 Way Double Door	CSDBMCCB100DD12IP43	12




225A Winbreak CS3A, CS3B and CS3C MCCB incomer Distribution Board*

Description	Product Code	No. of Ways
4 Way Double Door	CSDBMCCB225DD04IP43	4
8 Way Double Door	CSDBMCCB225DD08IP43	8
12 Way Double Door	CSDBMCCB225DD12IP43	12

*Also available with MCCB installed.

For selection table of MCCB please refer page no. 29

Dimensions

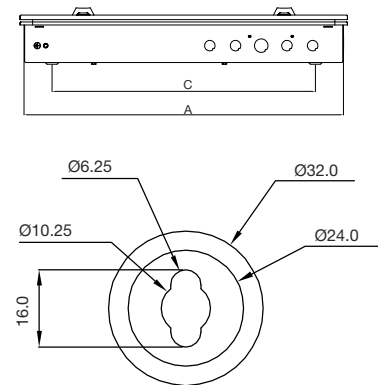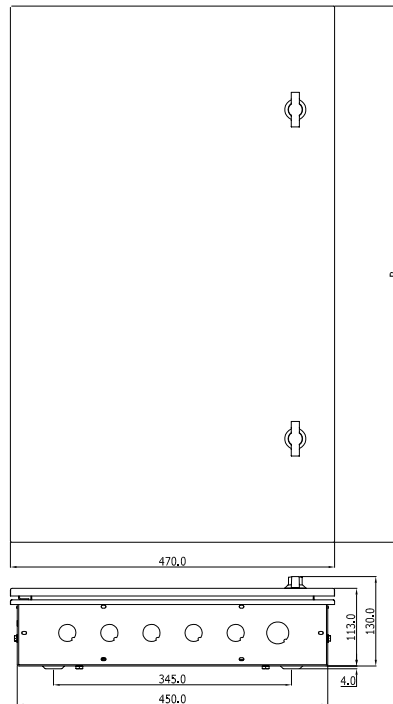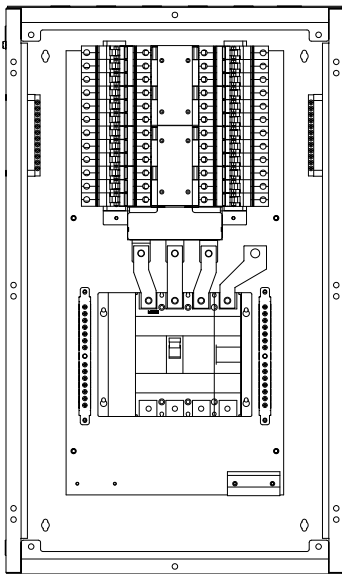

Mounting Hole Details

Product Code	No. of Ways	A	B	C	TOP		BOTTOM		SIDES	
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBMCCB100DD04IP43	4	653.0	669.0	517.0	1	5	1	5	1	4
CSDBMCCB100DD08IP43	8	761.0	777.0	625.0	1	5	1	5	1	4
CSDBMCCB100DD12IP43	12	869.0	885.0	733.0	1	5	1	5	1	4
CSDBMCCB225DD04IP43	4	653.0	669.0	517.0	1	5	1	5	1	4
CSDBMCCB225DD08IP43	8	761.0	777.0	625.0	1	5	1	5	1	4
CSDBMCCB225DD12IP43	12	869.0	885.0	733.0	1	5	1	5	1	4

All dimensions are in mm


Distribution Board

TPN Horizontal PPI Double Door Distribution Board with IP42 protection



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
4 Way Double Door	CSDBTPNPPIDD04	8+12	20
6 Way Double Door	CSDBTPNPPIDD06	8+18	26
8 Way Double Door	CSDBTPNPPIDD08	8+24	32
12 Way Double Door	CSDBTPNPPIDD12	8+36	44

Dimensions

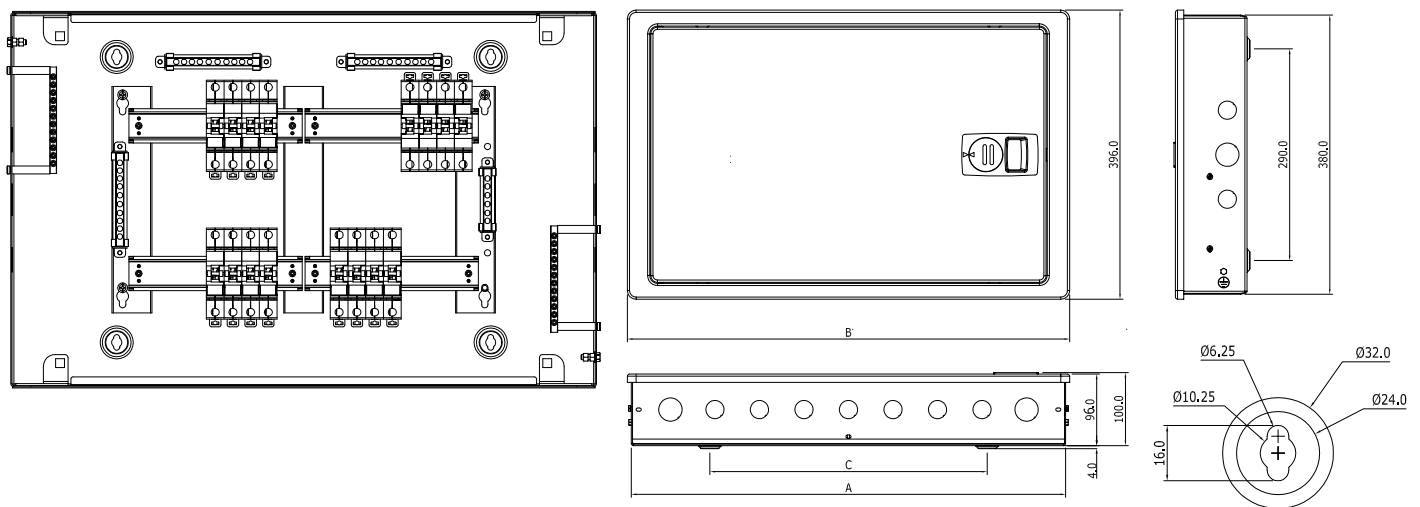

Mounting Hole Details

Product Code	No. of Ways	A	B	C	TOP		BOTTOM		SIDES	
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBTPNPPIDD04	4	450.0	461.0	330.0	2	5	2	5	1	2
CSDBTPNPPIDD06	6	595.0	606.0	380.0	2	7	2	7	1	2
CSDBTPNPPIDD08	8	595.0	606.0	380.0	2	7	2	7	1	2
CSDBTPNPPIDD12	12	740.0	751.0	430.0	2	9	2	9	1	2

All dimensions are in mm





TPN Phase Selector Double Door Distribution Board with IP43 protection

Phase Selector DB-TPN Phase Selector DD DB for incorporating MCB/Isolator/RCCB, equipped with 3 Nos 63A Phase selector switches & 3 Nos. Piano switches



Description	Product Code	No. of Ways
4 WAY DD with 63A R/S	CSDBPHSDD04RS63	4
6 WAY DD with 63A R/S	CSDBPHSDD06RS63	6
8 WAY DD with 63A R/S	CSDBPHSDD08RS63	8
12 WAY DD with 63A R/S	CSDBPHSDD12RS63	12
4 WAY DD with 40A R/S	CSDBPHSDD04RS40	4
6 WAY DD with 40A R/S	CSDBPHSDD06RS40	6
8 WAY DD with 40A R/S	CSDBPHSDD08RS40	8
12WAY DD with 40A R/S	CSDBPHSDD12RS40	12
4 WAY DD without R/S	CSDBPHSDD04	4
6 WAY DD without R/S	CSDBPHSDD06	6
8 WAY DD without R/S	CSDBPHSDD08	8
12 WAY DD without R/S	CSDBPHSDD12	12

Dimensions

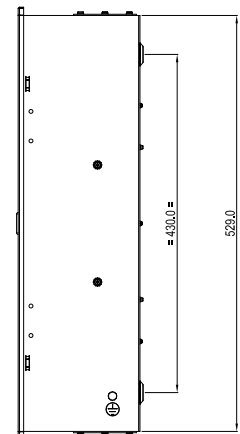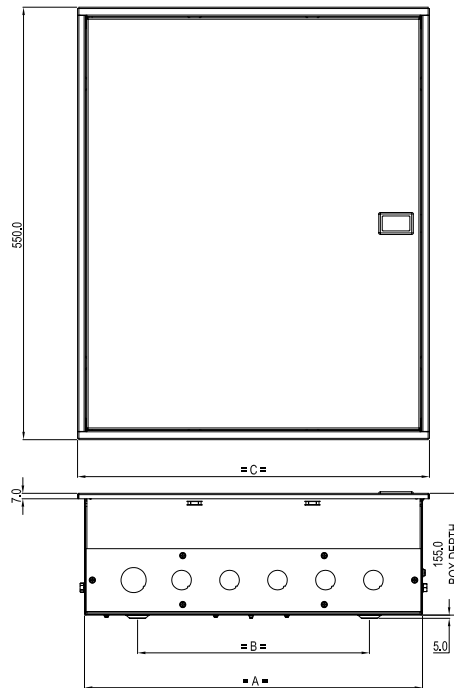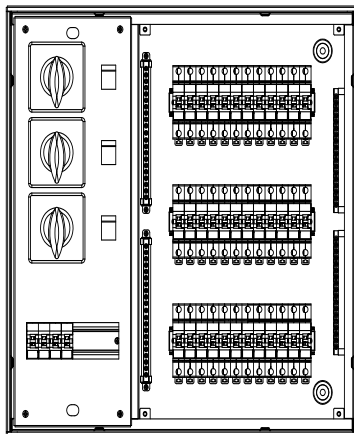

NOTE:-
1- # - FOR DB WITH ROTARY SWITCH
ADD 'RS63'
2- SHEET TH. 1.2mm

Product Code	No. of Ways	A	B	C	TOP		BOTTOM	
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBPHSDD04	4	395.0	295.0	413.0	1	4	1	4
CSDBPHSDD06	6	431.0	331.0	449.0	1	5	1	5
CSDBPHSDD08	8	467.0	367.0	485.0	1	5	1	5
CSDBPHSDD12	12	539.0	439.0	557.0	1	7	1	7

*Available fitted with Rotary Switch 40A / 63A

All dimensions are in mm



Distribution Board

Seven Segment Double Door Distribution Board with IP42 protection



Description	Product Code	No. of Ways	No. of Module
7 Segment TPN DD DB With Provision for FP MCB /Isolator/RCCB as incomer, DP MCB/Isolator/RCCB as sub incomer and SP MCBs as outgoing	CSDB7SEGDD04	4	8+(12+12)
	CSDB7SEGDD06	6	8+(12+18)
	CSDB7SEGDD08	8	8+(12+24)
	CSDB7SEGDD12	12	8+(12+36)

Dimensions

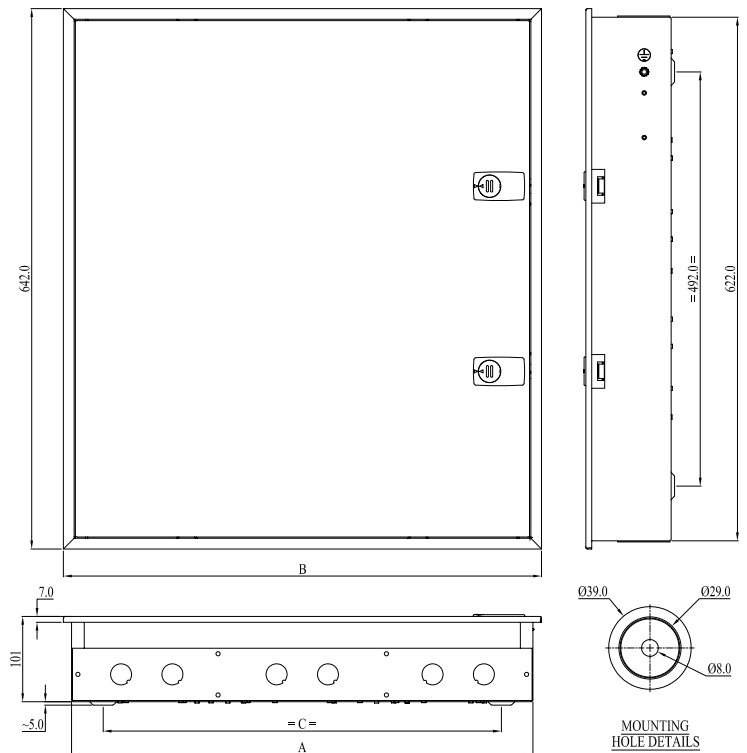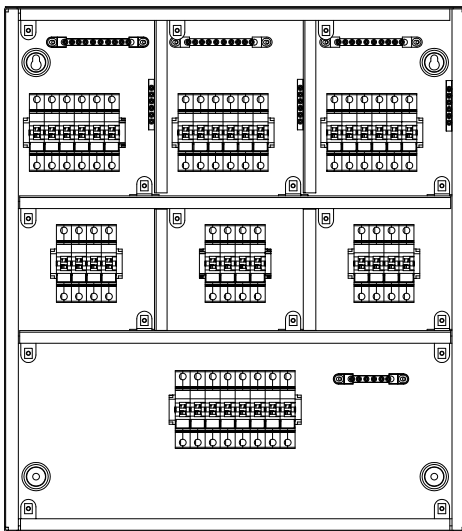

Product Code	No. of Ways	A	B	C	TOP	BOTTOM
					Ø32 Knockout	Ø32 Knockout
CSDB7SEGDD04	4	440.0	460.0	365.0	6	6
CSDB7SEGDD06	6	548.0	568.0	473.0	6	6
CSDB7SEGDD08	8	656.0	676.0	581.0	6	6
CSDB7SEGDD12	12	872.0	892.0	797.0	6	6


All dimensions are in mm

Flexy (Tier) Double Door Distribution Board with IP43 protection (Metal Door)



Description	Product Code	Total Modules
2 Row 13 Modules Double door	CSDBFLDD2R13	26
3 Row 13 Modules Double door	CSDBFLDD3R13	39
4 Row 13 Modules Double door	CSDBFLDD4R13	52

Dimensions

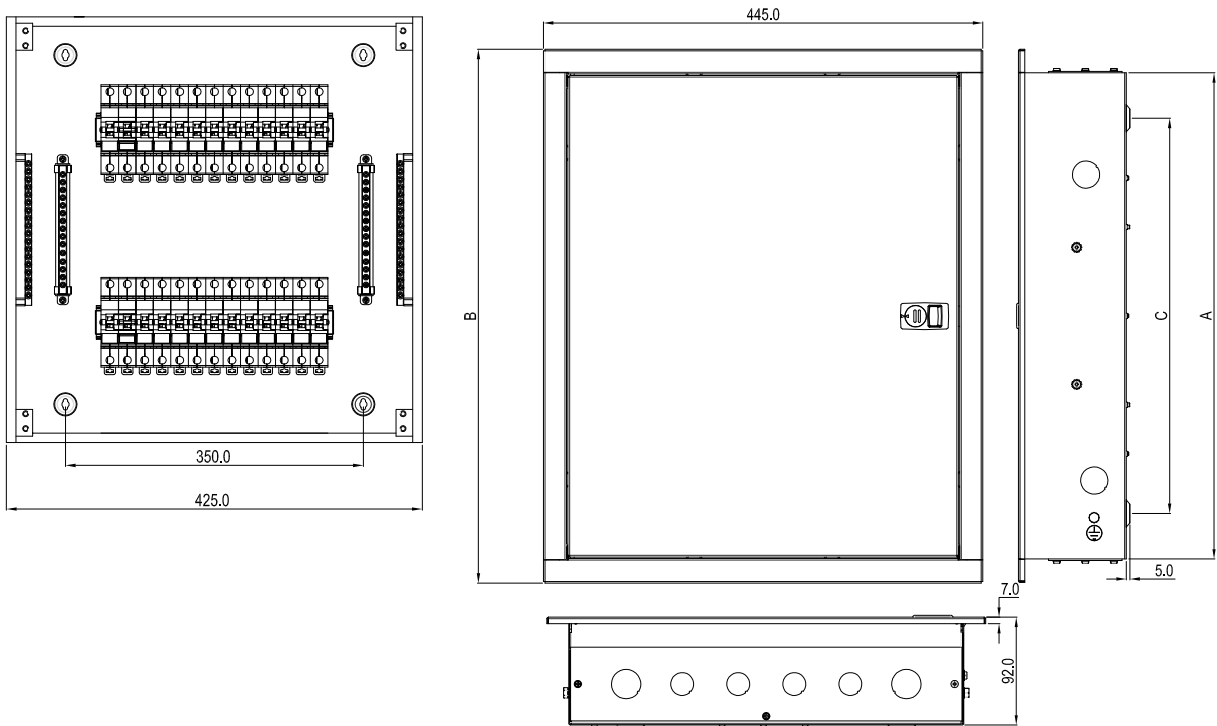

Product Code	Total Modules	A	B	C	TOP / BOTTOM		EACH SIDES
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout
CSDBFLDD2R13	26	415.0	435.0	305.0	2	5	2
CSDBFLDD3R13	39	560.0	580.0	450.0	2	5	2
CSDBFLDD4R13	52	720.0	740.0	610.0	2	5	2

All dimensions are in mm


Distribution Board

SPN Acrylic window Double Door Distribution Board with IP42 protection



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
SPN 4 Way Double Door	CSDBSPNDDA 2+04	2+04	6
SPN 8 Way Double Door	CSDBSPNDDA 2+08	2+08	10
SPN 12 Way Double Door	CSDBSPNDDA 2+12	2+12	14
SPN 16 Way Double Door	CSDBSPNDDA 2+14	2+14	16

Dimensions

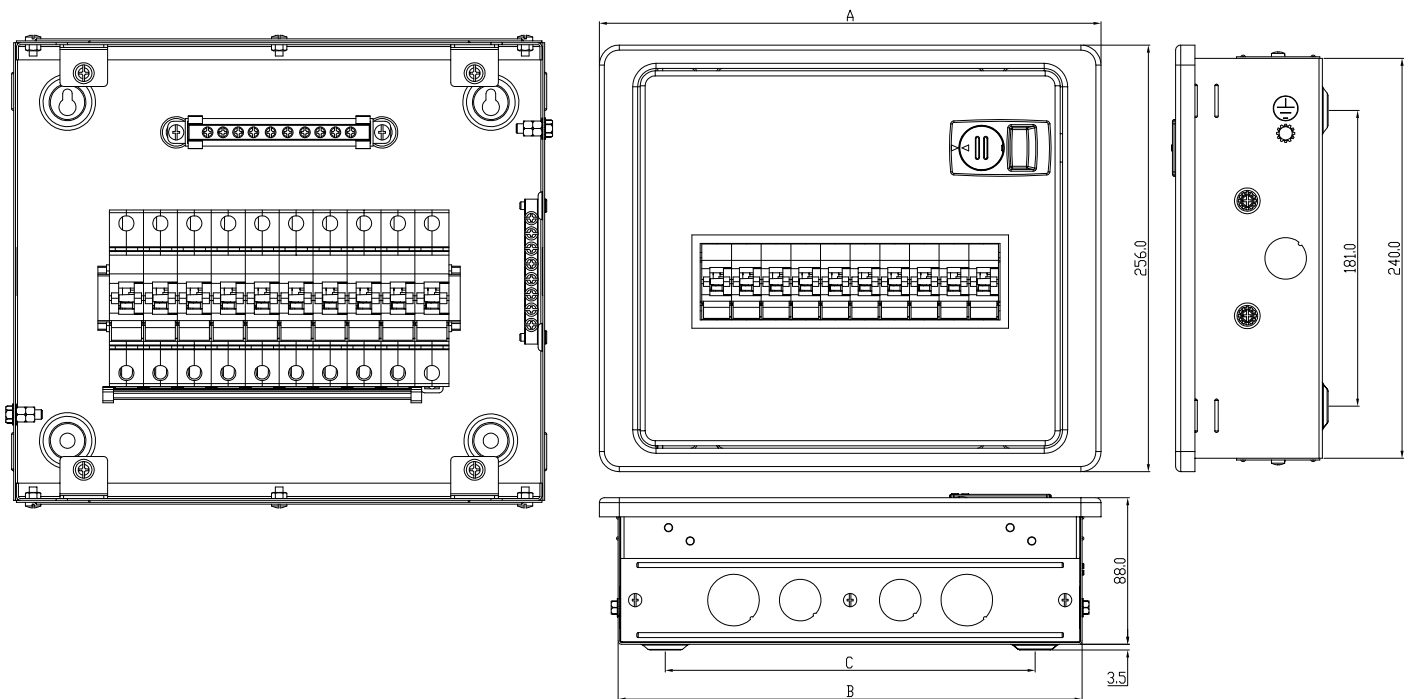

Product Code	No. of Ways	A	B	C	TOP / BOTTOM		EACH SIDES
					Ø32 Knockout	Ø25 Knockout	Ø32 Knockout
CSDBSPNDDA 2+04	02+04	229.0	206.0	150.0	3	-	1
CSDBSPNDDA 2+08	02+08	301.0	278.0	222.0	2	2	1
CSDBSPNDDA 2+12	02+12	373.0	350.0	294.0	4	2	1
CSDBSPNDDA 2+14 *	16	445.0	422.0	366.0	4	2	1

* Can be used as 16 way standard Distribution Board



All dimensions are in mm

SPN Tel. & TV Socket Double Door Distribution Board with IP43 protection



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
SPN 04 way	CSDBSPNTELTV04	2+4	6
SPN 06 way	CSDBSPNTELTV06	2+6	8
SPN 08 way	CSDBSPNTELTV08	2+8	10
SPN 10 way	CSDBSPNTELTV10	2+10	12
SPN 12 way	CSDBSPNTELTV12	2+12	14
SPN 14 way	CSDBSPNTELTV14	2+14	16

Dimensions

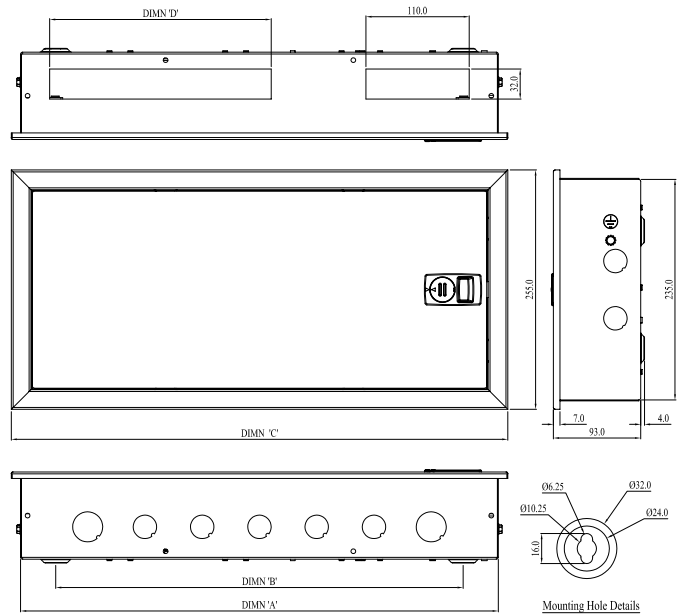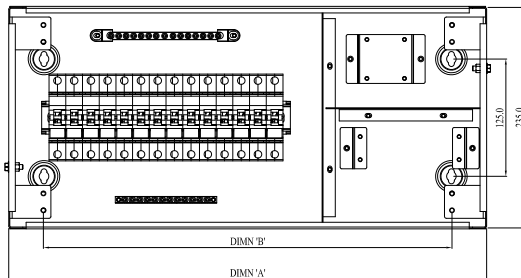

Product Code	No. of Ways	A	B	C	D	BOTTOM KNOCKOUTS		L. & R. KNOCKOUTS
						Ø25 Knockout	Ø32 Knockout	Ø25 Knockout
CSDBSPNTELTV04	04	365	290	385	150	3	2	2+2
CSDBSPNTELTV06	06	401	326	421	186	4	2	2+2
CSDBSPNTELTV08	08	437	362	457	222	4	2	2+2
CSDBSPNTELTV10	10	473	398	493	258	5	2	2+2
CSDBSPNTELTV12	12	509	434	529	294	5	2	2+2
CSDBSPNTELTV14	14	545	470	565	330	6	2	2+2

All dimensions are in mm


Distribution Board

TPN Tel. & TV Socket Double Door Distribution Board with IP43 protection



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
TPN 04 way	CSDBTPNTELT04	8+12	20
TPN 06 way	CSDBTPNTELT06	8+18	26
TPN 08 way	CSDBTPNTELT08	8+24	32
TPN 12 way	CSDBTPNTELT12	8+36	44

Dimensions

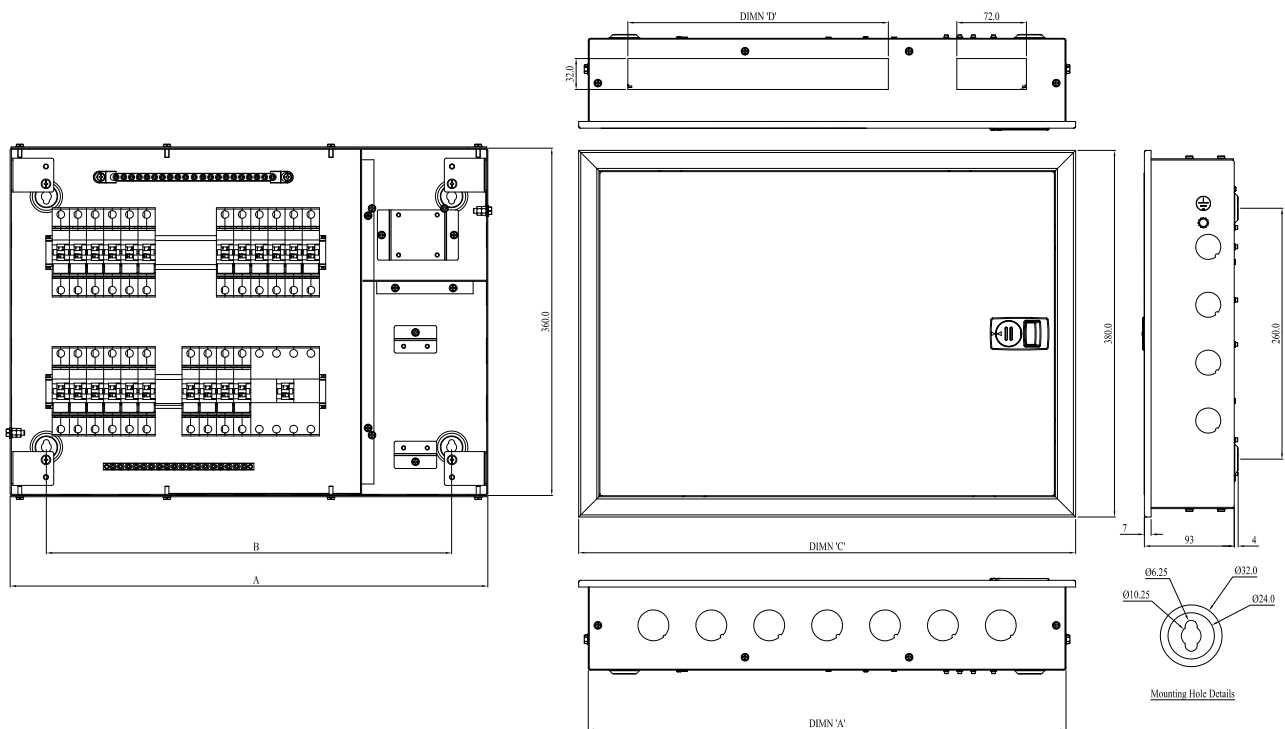

Product Code	No. of Ways	A	B	C	D	BOTTOM KNOCKOUTS	L. & R. KNOCKOUTS
						Ø32 Knockout	Ø25 Knockout
CSDBTPNDDTELT04	04	455	380	475	230	7	4+4
CSDBTPNDDTELT06	06	495	420	515	270	7	4+4
CSDBTPNDDTELT08	08	530	455	550	270	8	4+4
CSDBTPNDDTELT12	12	674	598	694	270	10	4+4


All dimensions are in mm

Polycarbonate Cover Consumer Unit DB



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
SPN 6 Way Double Door	CSDBSPNSDA 06	2+04	6
SPN 8 Way Double Door	CSDBSPNSDA 08	2+06	8
SPN 10 Way Double Door	CSDBSPNSDA 10	2+08	10
SPN 12 Way Double Door	CSDBSPNSDA 12	2+10	12
SPN 16 Way Double Door	CSDBSPNSDA 16	2+14	16

Dimensions

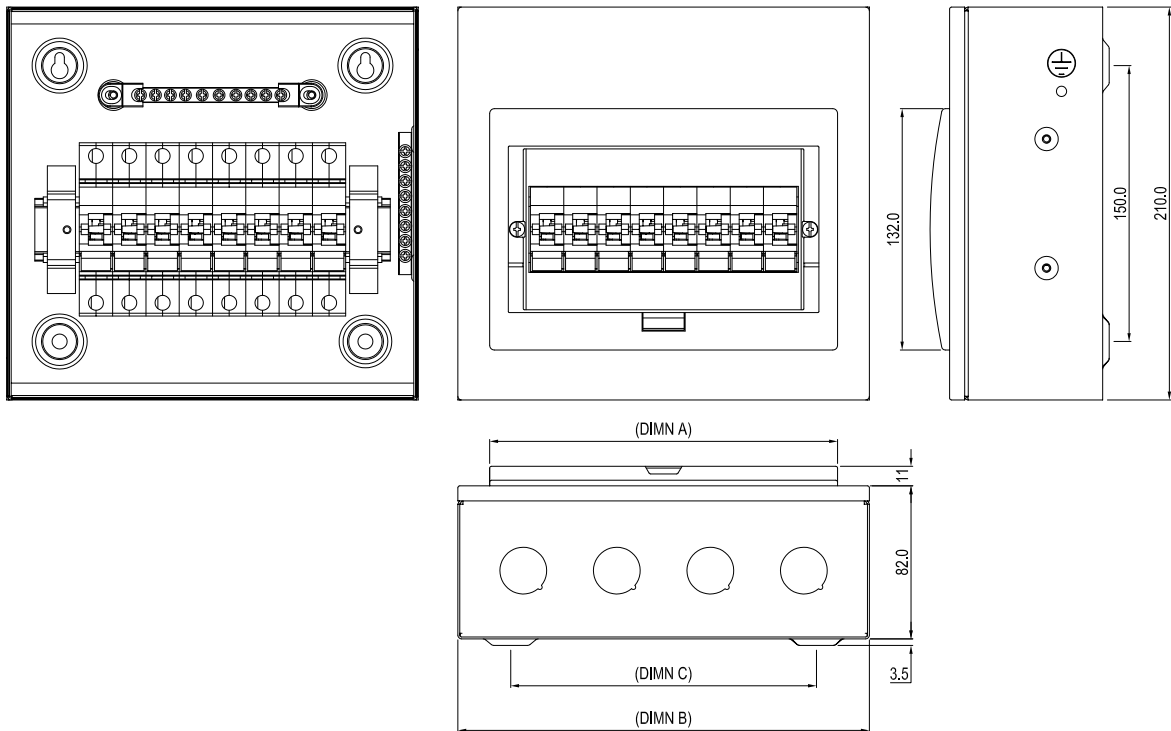

Product Code	No. of Ways	A	B	C	TOP / BOTTOM	EACH SIDES
					Ø25 Knockout	Ø32 Knockout
CSDBSPNSDA 06	06	151	168	110	3+3	-
CSDBSPNSDA 08	08	187	204	146	4+4	-
CSDBSPNSDA 10	10	223	240	182	5+5	-
CSDBSPNSDA12	12	259	276	218	6+6	-
CSDBSPNSDA 16	16	331	348	290	7+7	-

All dimensions are in mm


Distribution Board

Pre-wired SPN Distribution Board



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
SPN 4 Way Double Door	CSDBSPNDDPRE04	2+04	6
SPN 6 Way Double Door	CSDBSPNDDPRE06	2+06	08
SPN 8 Way Double Door	CSDBSPNDDPRE08	2+08	10
SPN 10 Way Double Door	CSDBSPNDDPRE10	2+10	12
SPN 12 Way Double Door	CSDBSPNDDPRE12	2+12	14
SPN 14 Way Double Door	CSDBSPNDDPRE14	2+14	16

Dimensions

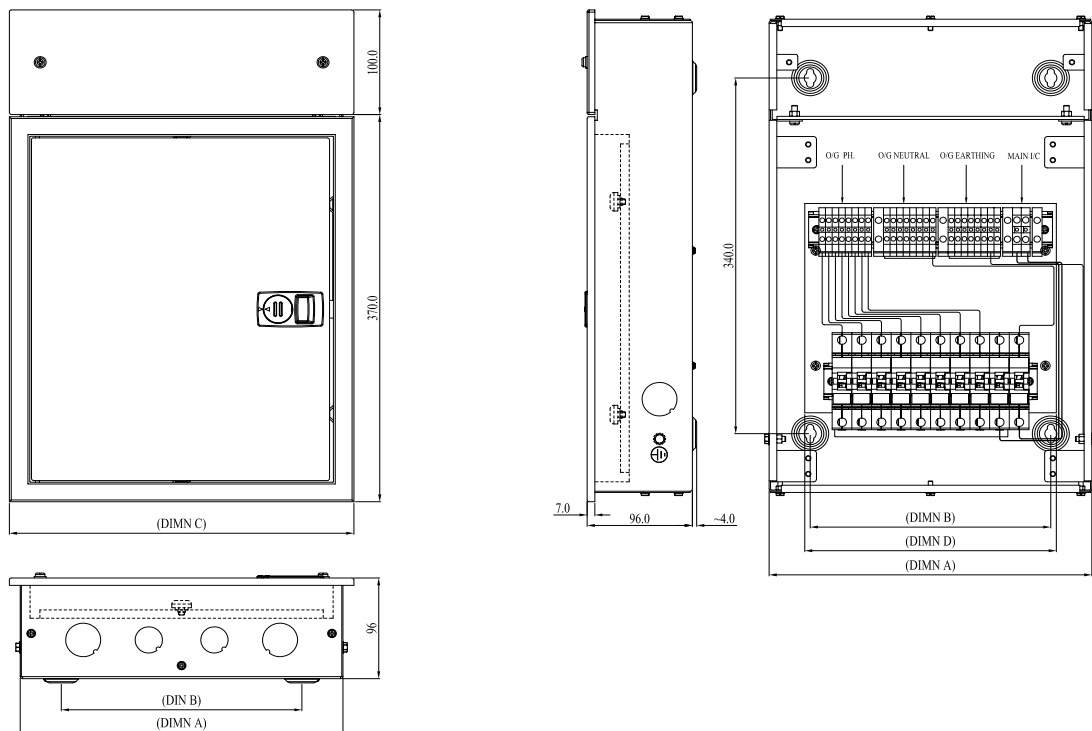

Product Code	A	B	C	D	PH. TB 4mm ²	NEUTRAL TB 4mm ²	EARTH TB 4mm ²	MAIN I/C TB 6mm ²	CRCA SHEET THICK IN mm
CSDBSPNDDPRE04	225	150	245	160	4 Nos.	4 Nos.	4 Nos.	2 Nos.	1.0
CSDBSPNDDPRE06	260	185	280	195	6 Nos.	6 Nos.	6 Nos.	2 Nos.	1.0
CSDBSPNDDPRE08	295	220	315	230	8 Nos.	8 Nos.	8 Nos.	2 Nos.	1.0
CSDBSPNDDPRE10	330	255	350	265	10 Nos.	10 Nos.	10 Nos.	2 Nos.	1.0
CSDBSPNDDPRE12	365	290	385	300	12 Nos.	12 Nos.	12 Nos.	2 Nos.	1.2
CSDBSPNDDPRE14	405	330	425	340	14 Nos.	14 Nos.	14 Nos.	2 Nos.	1.2


All dimensions are in mm

Pre-wired TPN Distribution Board



Description	Product Code	No. of Modules (Incomer + Outgoing)	Total Modules
TPN 4 Way Double Door	CSDBTPNDDPRE04	8+12	20
TPN 6 Way Double Door	CSDBTPNDDPRE06	8+18	26
TPN 8 Way Double Door	CSDBTPNDDPRE08	8+24	32
TPN 12 Way Double Door	CSDBTPNDDPRE12	8+36	44

Dimensions

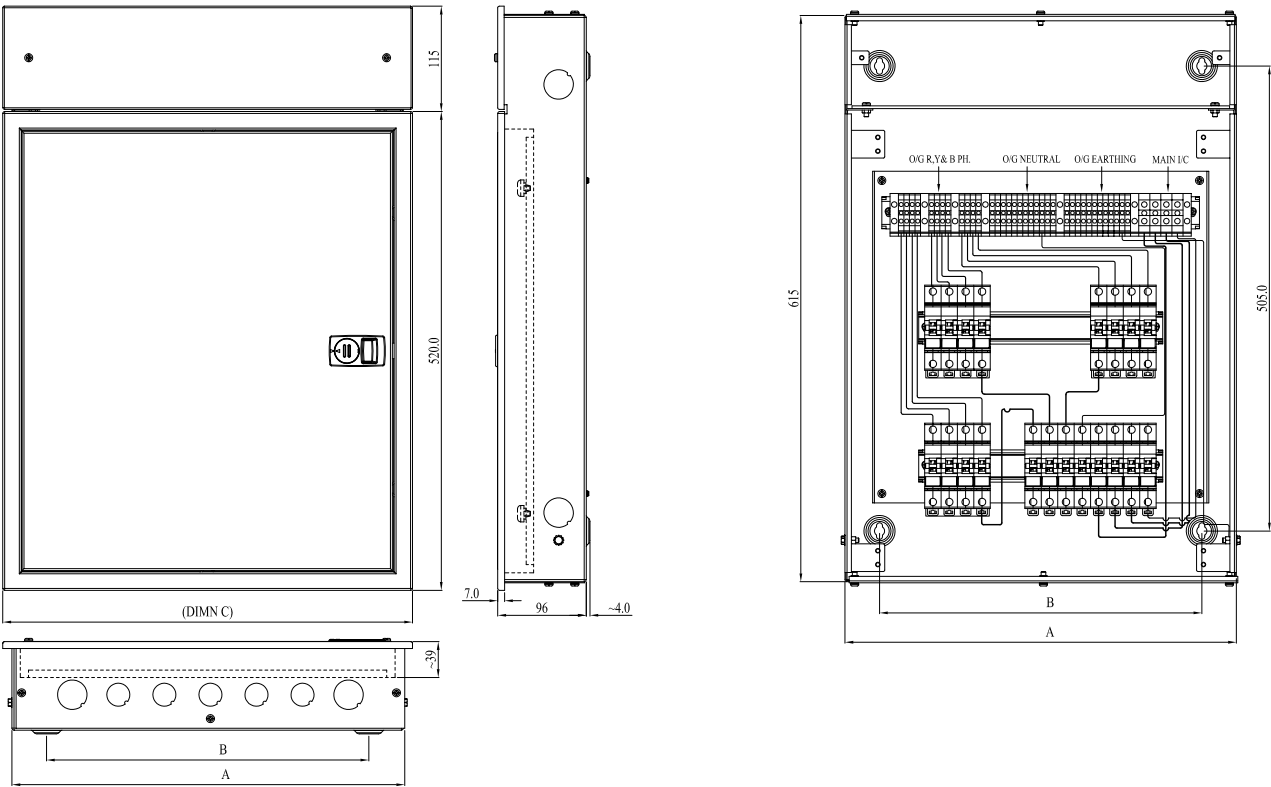

Product Code	A	B	C	D	PH. TB 4mm ²	NEUTRAL TB 4mm ²	EARTH TB 4mm ²	MAIN I/C TB 16mm ²	CRCB SHEET THICK IN mm
CSDBTPNDDPRE04	425	350	445	373	12 Nos.	12 Nos.	12 Nos.	4 Nos.	1.2
CSDBTPNDDPRE06	530	455	550	478	18 Nos.	18 Nos.	18 Nos.	4 Nos.	1.2
CSDBTPNDDPRE08	650	575	670	580	24 Nos.	24 Nos.	24 Nos.	4 Nos.	1.2
CSDBTPNDDPRE12	865	790	885	780	36 Nos.	36 Nos.	36 Nos.	4 Nos.	1.6

All dimensions are in mm


Distribution Board

Plug & Socket IP20 Single Door




Description	Product Code
SPN Plug 10A	CSDBPSPN010
SPN Socket 10A	CSDBSSPN010
SPN Plug 20A	CSDBPSPN020
SPN Socket 20A	CSDBSSPN020
TPN Plug 20A	CSDBPTPN020
TPN Socket 20A	CSDBSTPN020
TPN Plug 30A	CSDBPTPN030
TPN Socket 30A	CSDBSTPN030

Dimensions

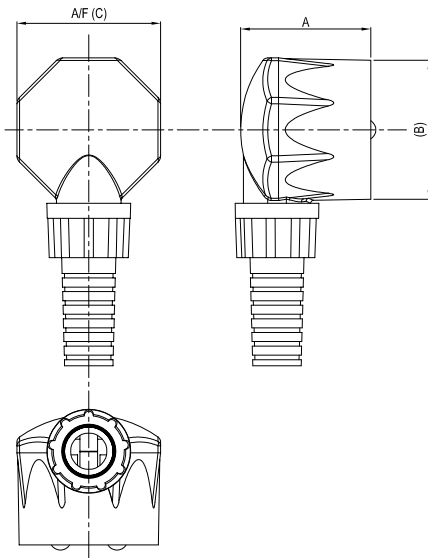

Overall Dimensions- Plug

Product Code	Description	(A)	(B)	A/F (C)
CSDBPSPN010	PLUG 10A SPN	38.0	40.0	42.0
CSDBPSPN020	PLUG 20A SPN	43.0	46.0	47.0
CSDBPTPN020	PLUG 20A TPN	46.0	52.5	57.0
CSDBPTPN030	PLUG 30A TPN	74.0	62.5	68.0

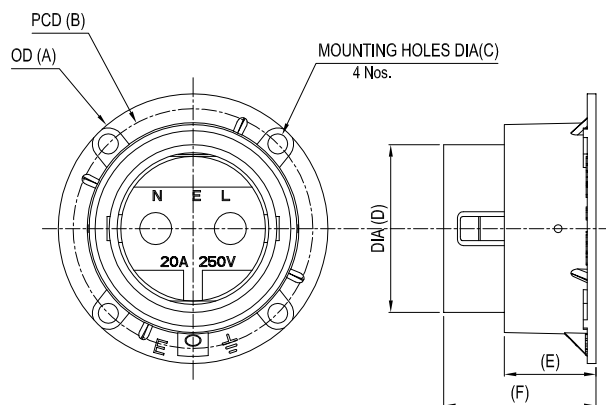

Product Code	DESCRIPTION	DIA(A)	(B)	PCD(B)	DIA (C)	DIA(D)	(E)	(F)
CSDBSSPN010	SOCKET 10A SPN	57.0	40.0	PCD 50.0	4.3	34.8	15.5	28.0
CSDBSSPN020	SOCKET 20A SPN	67.0	46.0	PCD 60.0	5.0	42.0	23.0	38.2
CSDBSTPN020	SOCKET 20A TPN	75.0	52.5	PCD 68.0	5.0	47.0	26.5	41.5
CSDBSTPN030	SOCKET 30A TPN	84.0	62.5	PCD 75.0	5.0	56.0	31.5	55.0


All dimensions are in mm

Plug & Socket IP20 Single Door



Description	Product Code
SPN 10A	CSDBPSSPN010
SPN 20A	CSDBPSSPN020
SPN 20A (SP Cutout)	CSDBPSSPN020SP
TPN 20A	CSDBPSTPN020
TPN 30A	CSDBPSTPN030

Dimensions

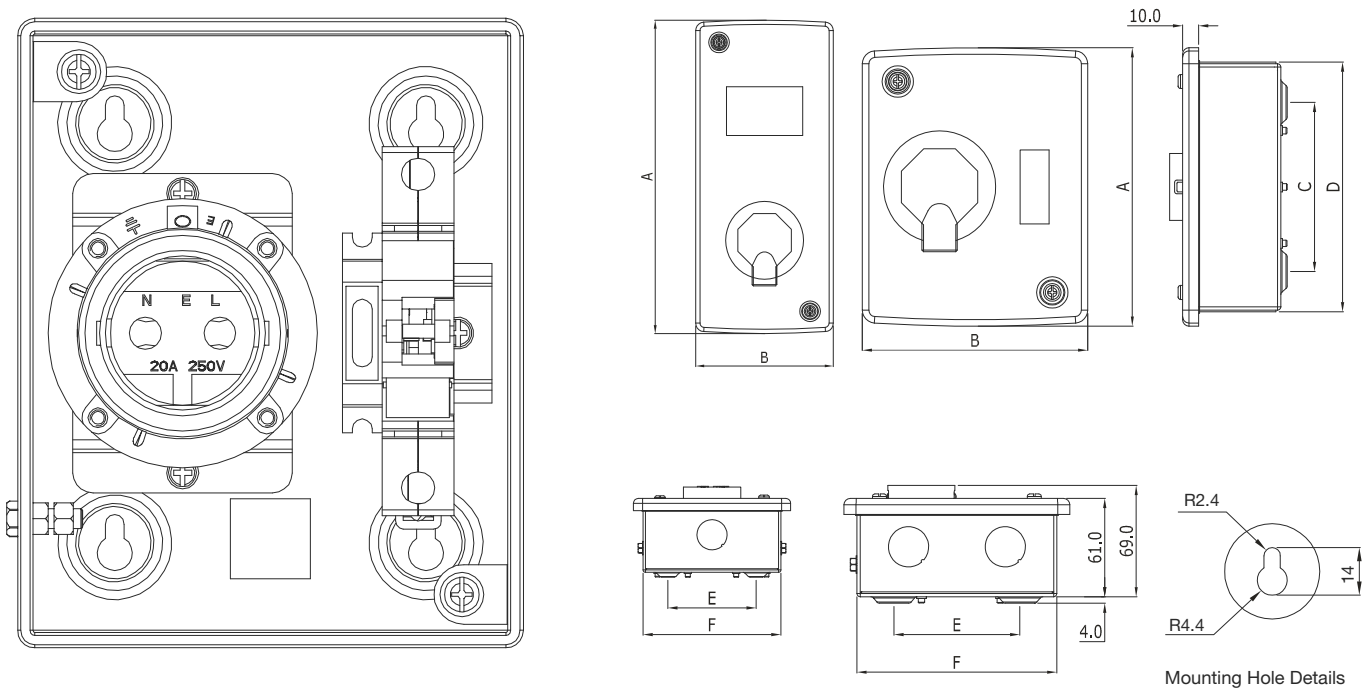

Product Code	A	B	C	D	E	F	TOP	BOTTOM
							Ø25 Knockout	Ø25 Knockout
CSDBPSSPN010	173	140	105	153	78	124	2	2
CSDBPSSPN020	173	140	105	153	78	124	2	2
CSDBPSTPN020	296	130	234	276	73	114	1	1
CSDBPSTPN030	296	130	234	276	73	114	1	1


All dimensions are in mm

MCB Enclosure IP 55



Description	Product Code
MCB Enclosure IP 55 04 way	CSDBEP04

Dimensions

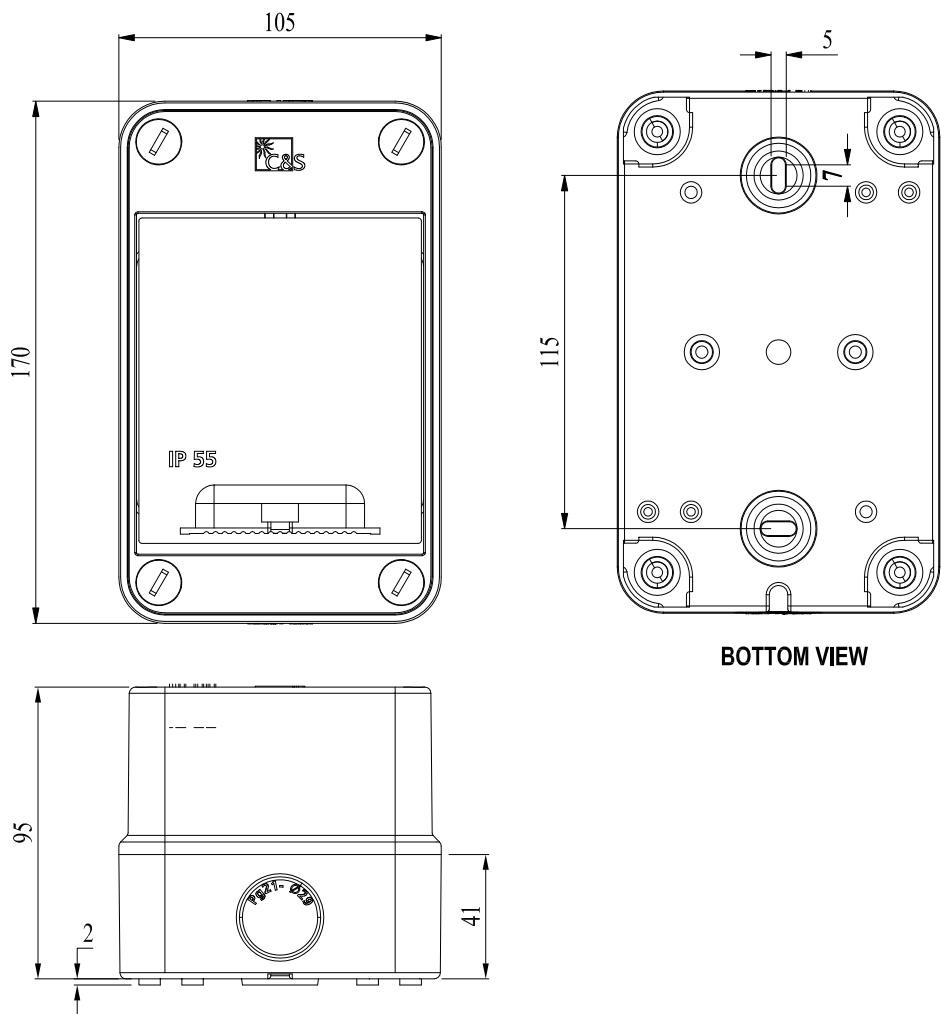

All dimensions are in mm

Metal Enclosure (with Din Rail)



Description	Product Code
Single Pole / Double Pole	CSDBMCBEDP
Three Pole / Four Pole	CSDBMCBEFP


Plastic Enclosure




Description	Product Code
Single Pole / Double Pole	CSDBMCBEPDP
Three Pole / Four Pole	CSDBMCBEFP

Dimensions

MCB Enclosure SP/DP

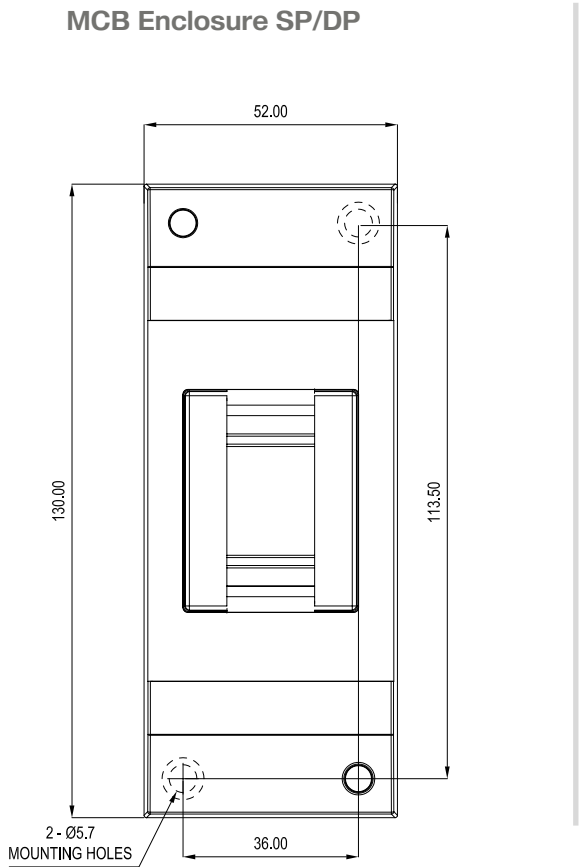

MCB Enclosure TP/FP

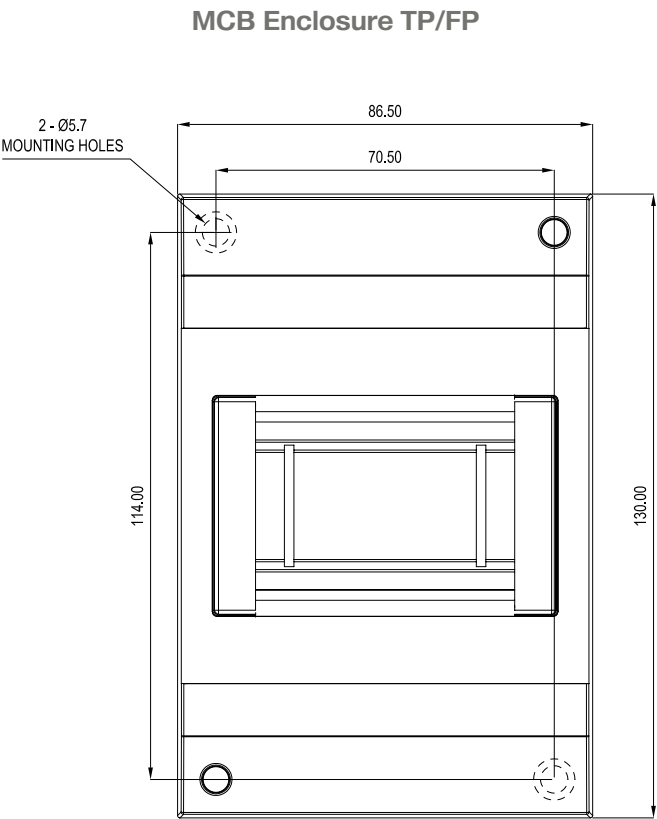


Distribution Board

TPNH Cable End Box Double Door Distribution Board



Description	Product Code
TPNH 4 way	CSDBC BTPNHDD04
TPNH 6 way	CSDBC BTPNHDD06
TPNH 8 way	CSDBC BTPNHDD08
TPNH 12 way	CSDBC BTPNHDD12
TPNH 16 way	CSDBC BTPNHDD16

Dimensions

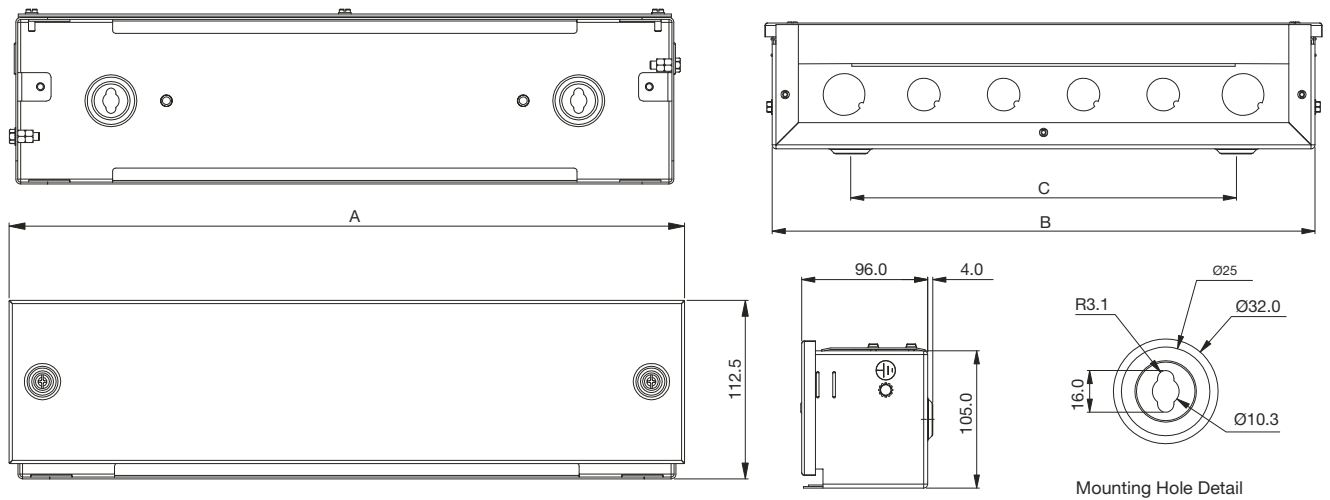

					TOP	
Product Code	No. of Ways	A	B	C	Ø25 Knockout	Ø32 Knockout
CSDBC BTPNHDD04	4	426	415	295	4	2
CSDBC BTPNHDD06	6	426	415	295	4	2
CSDBC BTPNHDD08	8	461	450	330	5	2
CSDBC BTPNHDD12	12	606	595	380	7	2
CSDBC BTPNHDD16	16	751	740	430	9	2


All dimensions are in mm

TPNV Cable End Box Double Door Distribution Board



Description	Product Code
TPNV 4 way	CSDBC BTPNVDD04
TPNV 8 way	CSDBC BTPNVDD08
TPNV 12 way	CSDBC BTPNVDD12

Dimensions

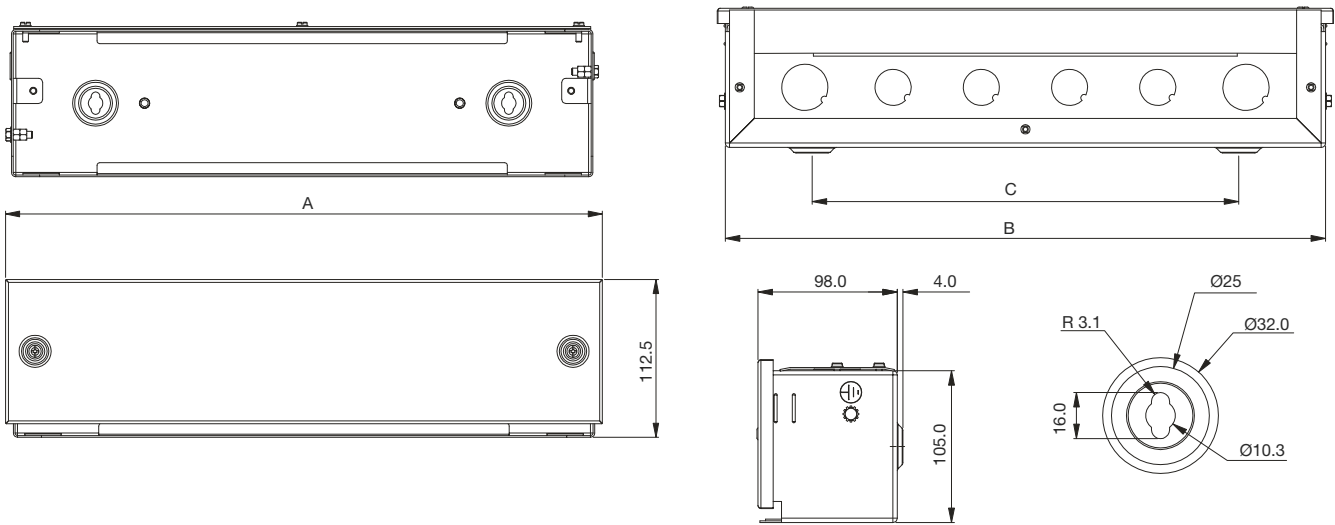

					TOP	
Product Code	No. of Ways	A	B	C	Ø25 Knockout	Ø32 Knockout
CSDBC BTPNVDD	4	396	380	290	5	1
CSDBC BTPNVDD	8	396	380	290	5	1
CSDBC BTPNVDD	12	396	380	290	5	1

All dimensions are in mm


Distribution Board

SPN Cable End Box Double Door Distribution Board



Description	Product Code
SPN 4 way	CSDBCBSNDD04
SPN 8 way	CSDBCBSNDD08
SPN 12 way	CSDBCBSNDD12
SPN 16 way	CSDBCBSNDD16

Dimensions

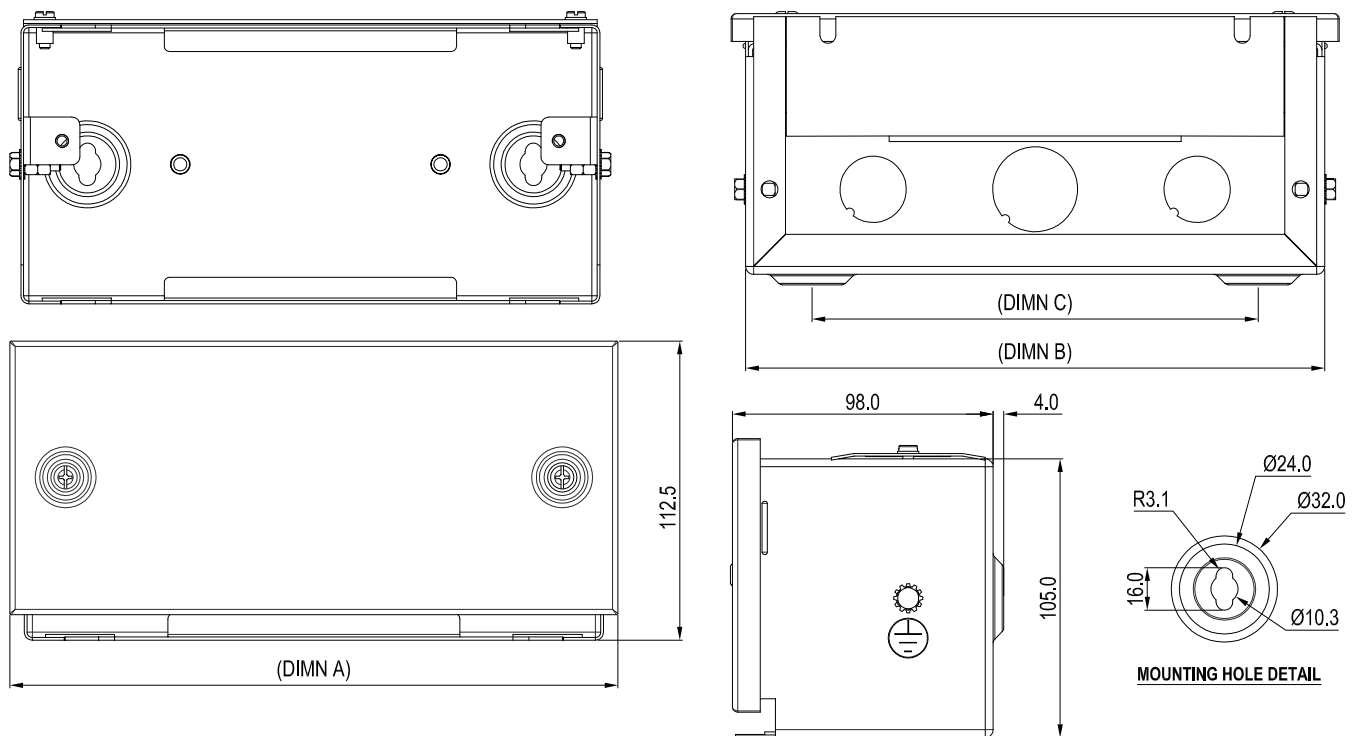

					TOP	
Product Code	No. of Ways	A	B	C	Ø25 Knockout	Ø32 Knockout
CSDBCBSNDD04	4	229	218	168	2	1
CSDBCBSNDD08	8	301	290	240	2	2
CSDBCBSNDD12	12	373	362	312	4	2
CSDBCBSNDD16	16	445	434	384	6	2

All dimensions are in mm

Appliances		Capacity/ Approx. Wattage	Rating (A)	MCB Type
	Air-Conditioner	1.0 T 1.5 T 2.0 T	16A 20A 32A	C Type C Type C.Type
	Refrigrator	165 L 350 L	3A 4A	C Type C Type
	Oven + Griller	4500 W 1750 W	25A 10A	B Type B Type
	Oven	750 W	6A	B Type
	Toaster	1200 W	10A	B Type
	Electric Kettle	1500 W	10A	B Type
	Electric Iron	750 W	6A	B Type
	Electric Geyser	4000 W	20A	B Type
	Mixer	200 W	2A	C Type
	Washing Machine	1300 W	10A	C Type

Final Distribution Products

RCCB

Protects from
SHOCK



MCB

Protects from
SHORT CIRCUIT
AND OVERLOAD

C&S Electric Ltd.

Corporate Office & CMO: 222, Okhla Industrial Estate, Phase-III, New Delhi-110020 (India)

Tel.: +91-11-3088 7520 - 29 Fax: +91-11-2684 7154, 2682 9063 E-mail: cmo@cselectric.co.in

International Business Division: Tel.: +91-11-3088 7520 - 29 Fax: +91-11-2684 8241, 2684 7342

E-mail: exports@cselectric.co.in



FDP/Combina/24 11 2014